
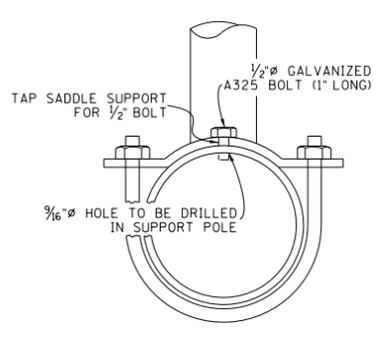
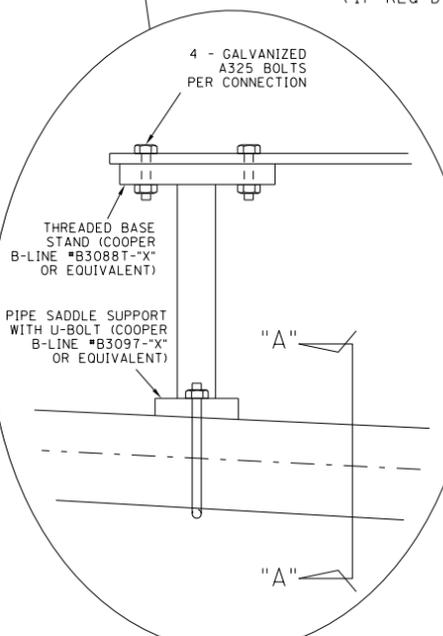
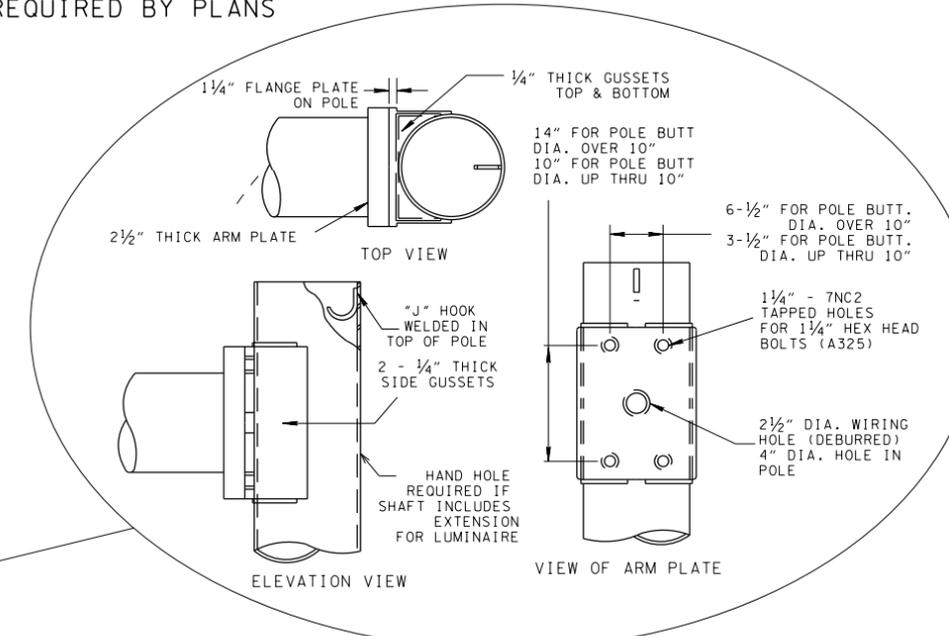
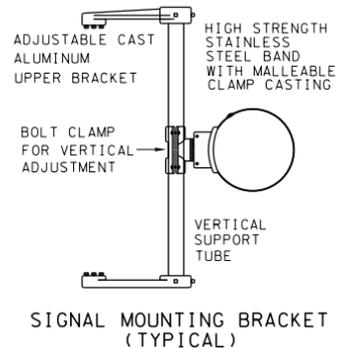
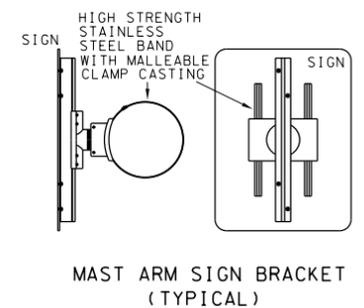


DETAIL FOR LUMINAIRE EXTENSION AS REQUIRED BY PLANS

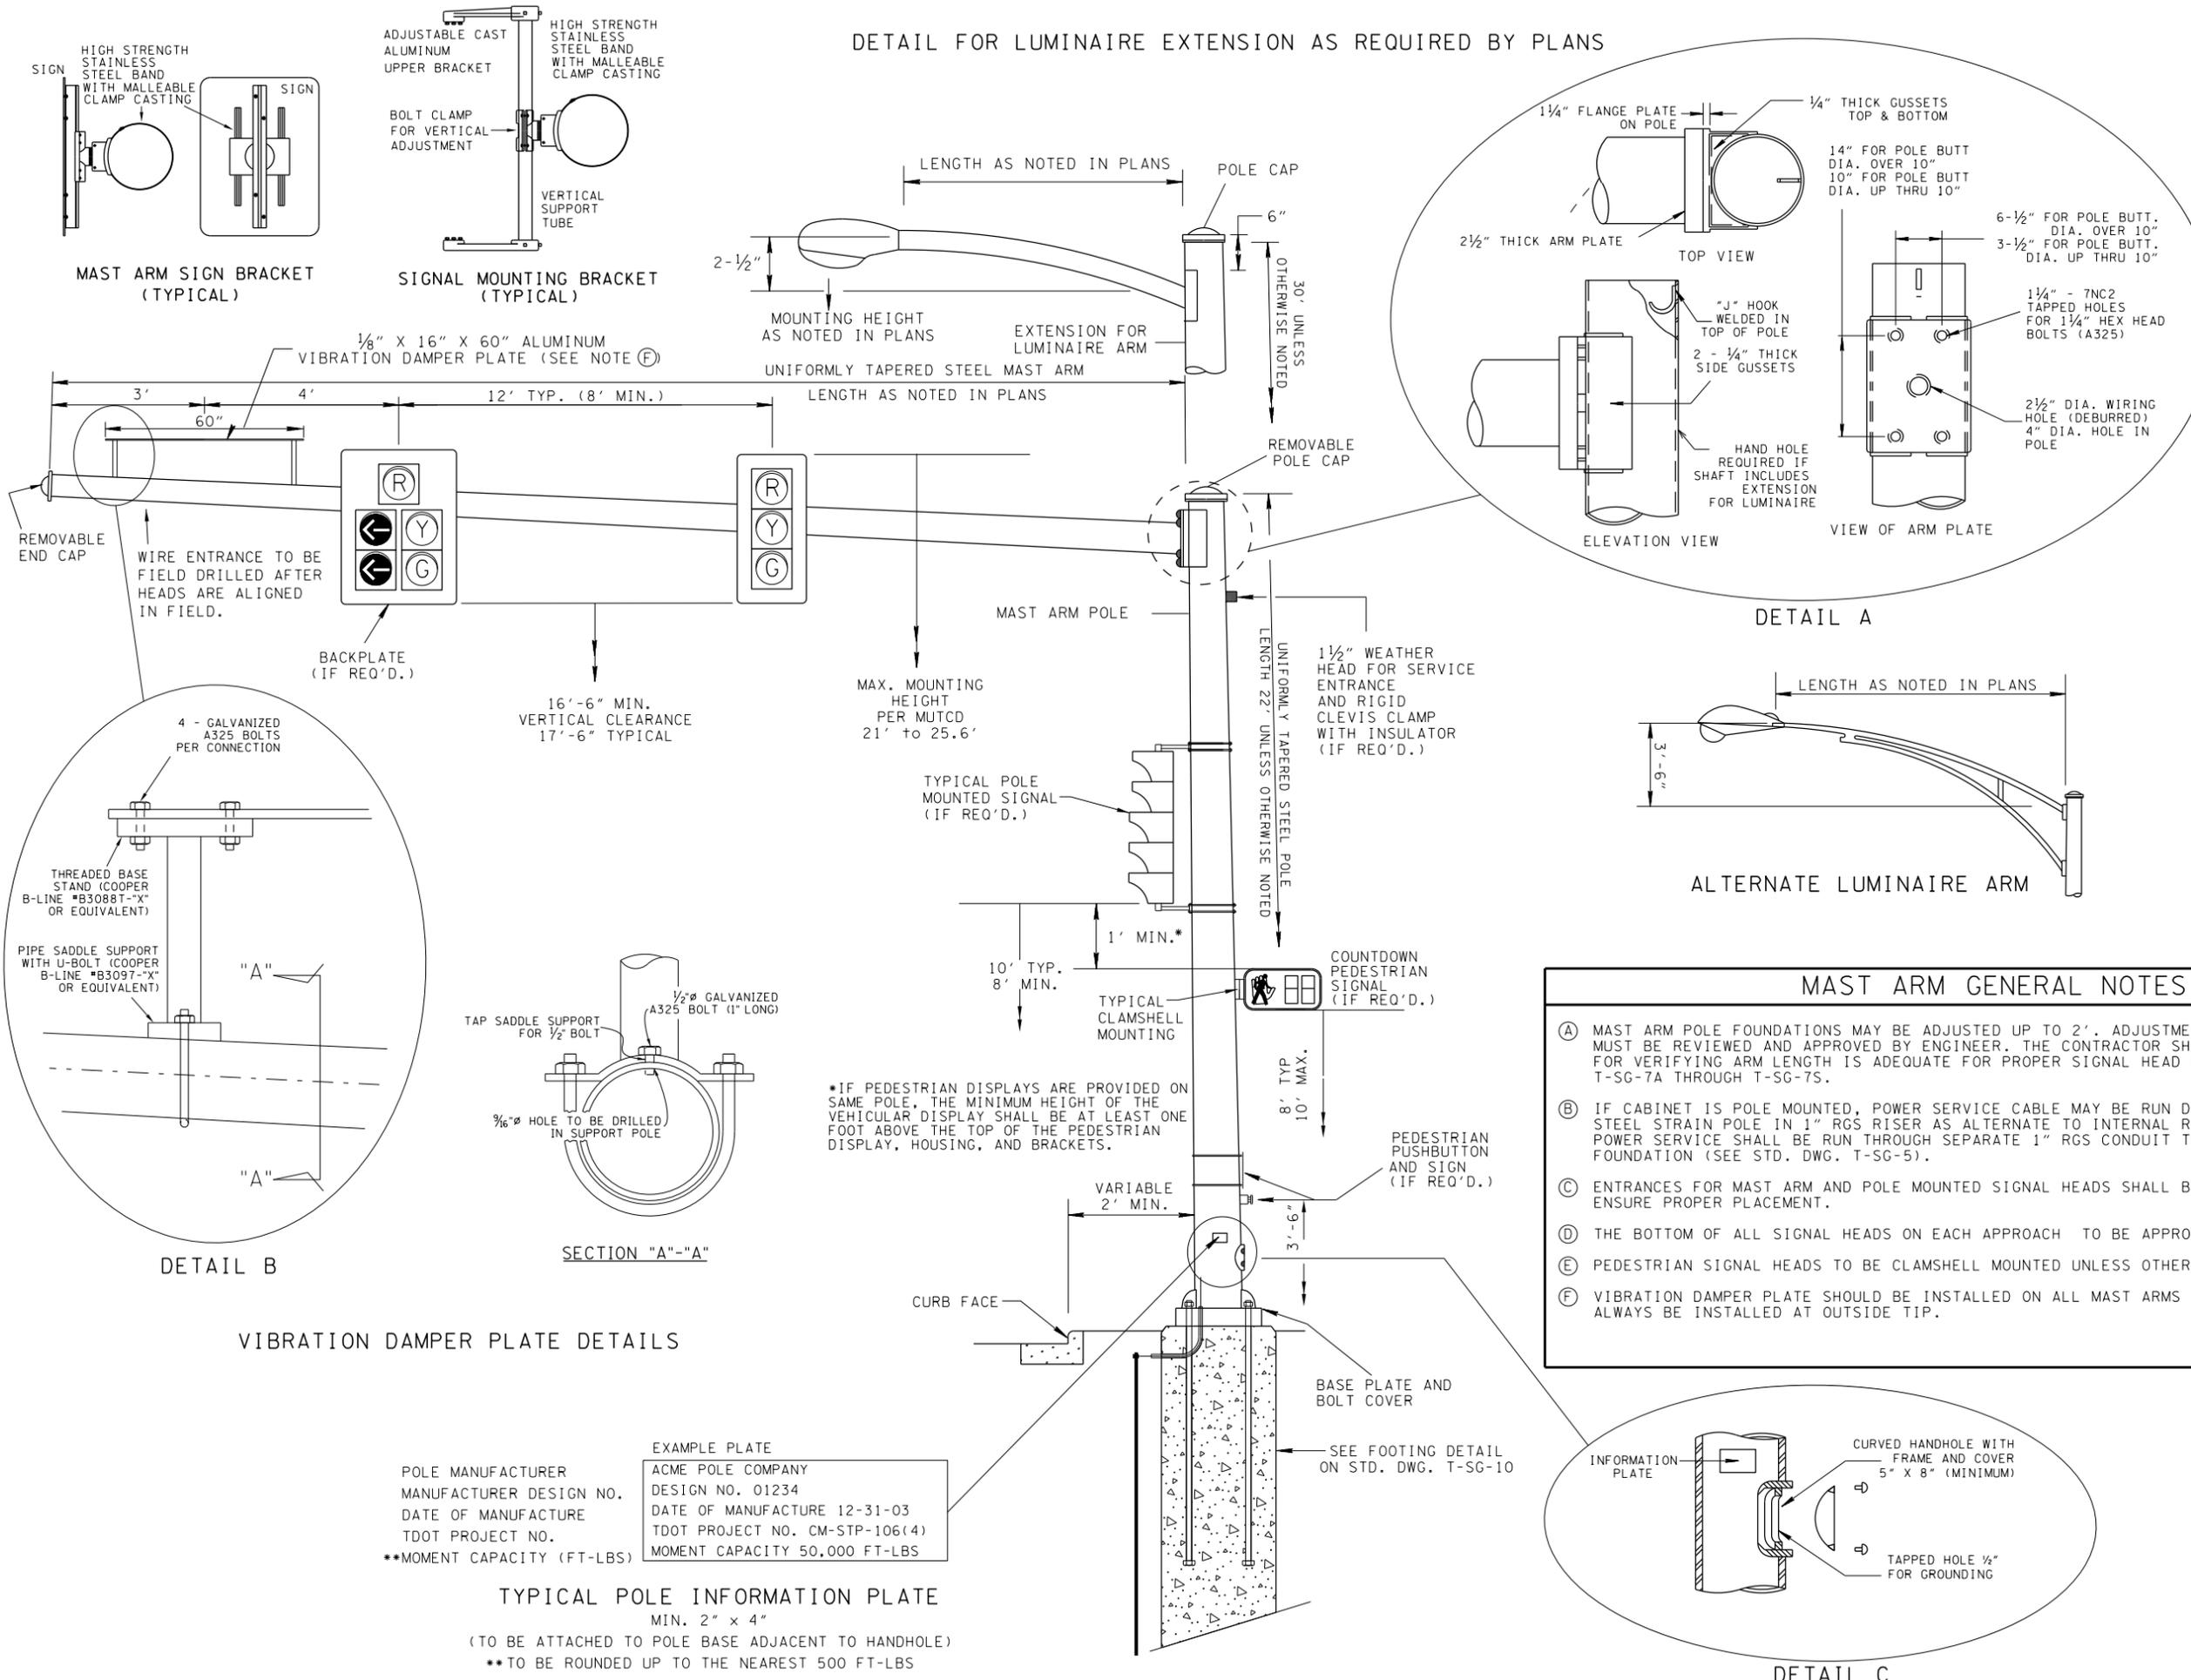


- MAST ARM GENERAL NOTES**
- (A) MAST ARM POLE FOUNDATIONS MAY BE ADJUSTED UP TO 2'. ADJUSTMENTS GREATER THAN 2' MUST BE REVIEWED AND APPROVED BY ENGINEER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING ARM LENGTH IS ADEQUATE FOR PROPER SIGNAL HEAD PLACEMENT PER T-SG-7A THROUGH T-SG-7S.
  - (B) IF CABINET IS POLE MOUNTED, POWER SERVICE CABLE MAY BE RUN DOWN OUTSIDE OF STEEL STRAIN POLE IN 1" RGS RISER AS ALTERNATE TO INTERNAL RUN. UNDERGROUND POWER SERVICE SHALL BE RUN THROUGH SEPARATE 1" RGS CONDUIT THROUGH POLE FOUNDATION (SEE STD. DWG. T-SG-5).
  - (C) ENTRANCES FOR MAST ARM AND POLE MOUNTED SIGNAL HEADS SHALL BE FIELD DRILLED TO ENSURE PROPER PLACEMENT.
  - (D) THE BOTTOM OF ALL SIGNAL HEADS ON EACH APPROACH TO BE APPROX. SAME HEIGHT.
  - (E) PEDESTRIAN SIGNAL HEADS TO BE CLAMSHELL MOUNTED UNLESS OTHERWISE SHOWN ON PLANS.
  - (F) VIBRATION DAMPER PLATE SHOULD BE INSTALLED ON ALL MAST ARMS 50' OR LONGER AND ALWAYS BE INSTALLED AT OUTSIDE TIP.

VIBRATION DAMPER PLATE DETAILS

|                            |                                |
|----------------------------|--------------------------------|
| POLE MANUFACTURER          | EXAMPLE PLATE                  |
| MANUFACTURER DESIGN NO.    | ACME POLE COMPANY              |
| DATE OF MANUFACTURE        | DESIGN NO. 01234               |
| TDOT PROJECT NO.           | DATE OF MANUFACTURE 12-31-03   |
| **MOMENT CAPACITY (FT-LBS) | TDOT PROJECT NO. CM-STP-106(4) |
|                            | MOMENT CAPACITY 50,000 FT-LBS  |

**TYPICAL POLE INFORMATION PLATE**  
 MIN. 2" x 4"  
 (TO BE ATTACHED TO POLE BASE ADJACENT TO HANDHOLE)  
 \*\* TO BE ROUNDED UP TO THE NEAREST 500 FT-LBS

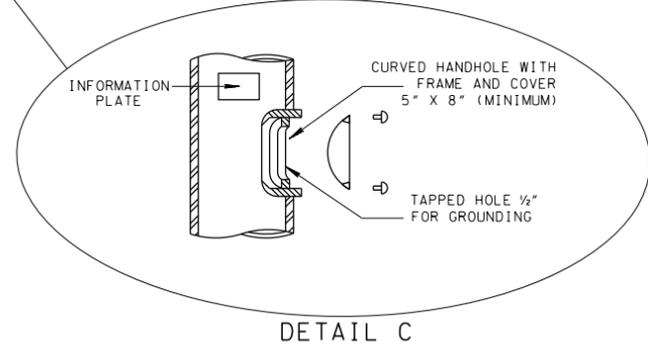

- REV. 7-29-92: DELETED CLAMP AND CLEVIS MOUNT FOR SIGNAL HEADS.
- REV. 7-29-96: REDREW SHEET ON CADD AND MADE MINOR CHANGES.
- REV. 12-16-03: REDREW SHEET. REV. SIGNAL MOUNTING BRACKET, ADDED SIGN MOUNTING BRACKET DETAIL AND REDREW POLE DETAIL. ADDED MAX. MOUNTING HEIGHT FOR SIGNAL HEADS AND ADDED HAND HOLE DETAIL.
- REV. 7-29-04: REDREW AND REDESIGNED SHEET.
- REV. 11-16-07: ADDED VIBRATION DAMPER PLATE DETAILS.
- REV. 12-4-13: CHANGED ANCHOR BOLTS TO THREADED.
- REV. 6-27-16: REVISED SIGNAL HEAD AND VIBRATION DAMPER PLATE MOUNTING DIMENSIONS. CHANGED PEDESTRIAN SIGNAL HEAD TO COUNTDOWN. ADDED 1" MIN. DIMENSION BETWEEN POLE MOUNTED SIGNAL HEAD AND COUNTDOWN PEDESTRIAN SIGNAL HEAD ALONG WITH NOTE. REVISED NOTES (A) AND (B) IN MAST ARM GENERAL NOTES. DELETED NOTE (C), AND RE-LETTERED REMAINING NOTES. MADE MINOR TEXT EDITS ON SHEET. REVISED EXAMPLE POLE INFORMATION PLATE.

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

DETAILS OF  
 CANTILEVER  
 SIGNAL SUPPORT  
 BEFORE 7-29-92 T-SG-9

23-AUG-2016 11:41 \\AG035DCWF00008.net.ads.state.tn.us\3SHARED\Traffic Operations Division\Traffic\Design\Standard Drawings\Signals\TS09\_062716.DGN