




SEE S-GR-20 FOR GUARDRAIL ATTACHMENT OR S-SSMB-2 FOR MEDIAN BARRIER WALL DETAILS

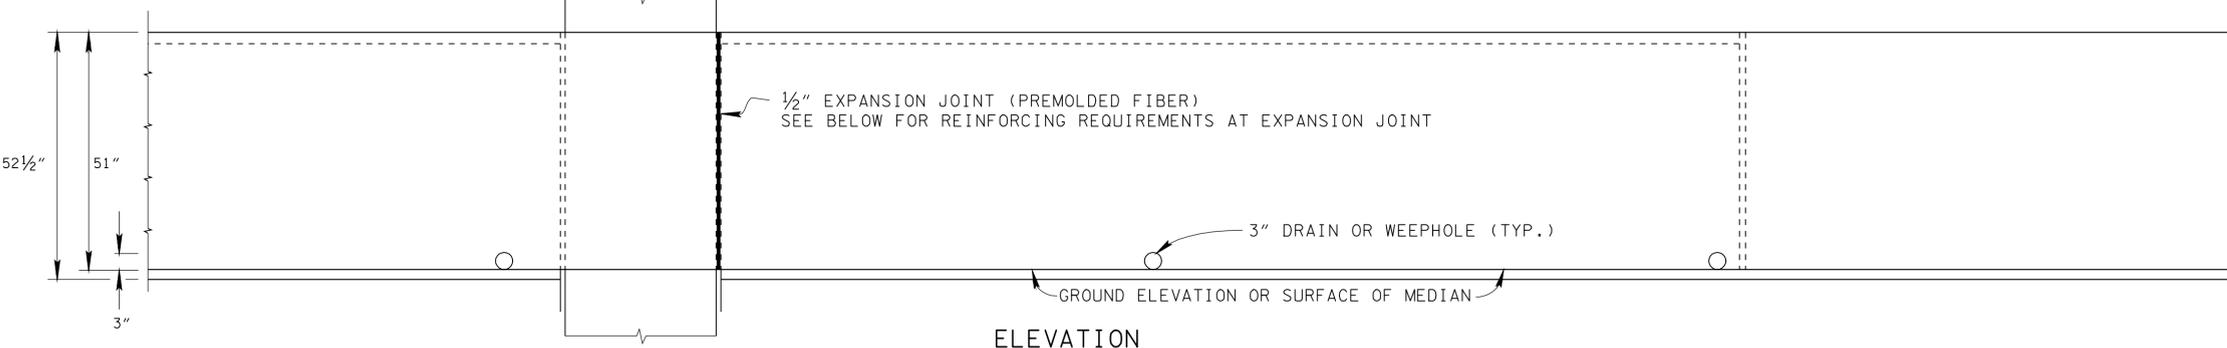


| REINFORCING STEEL LEGEND | |
|--------------------------|------|
| | A400 |
| | A500 |
| | A600 |

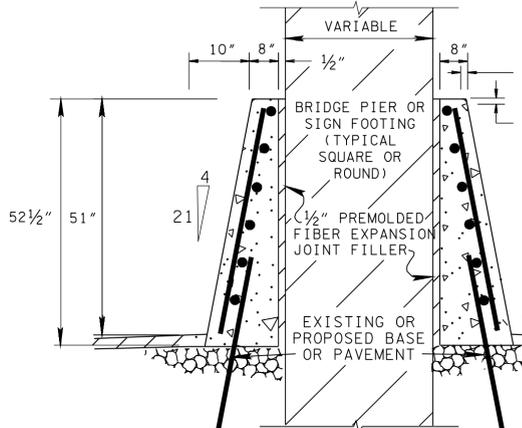


SECTION A-A (DETAIL AT PIERS)

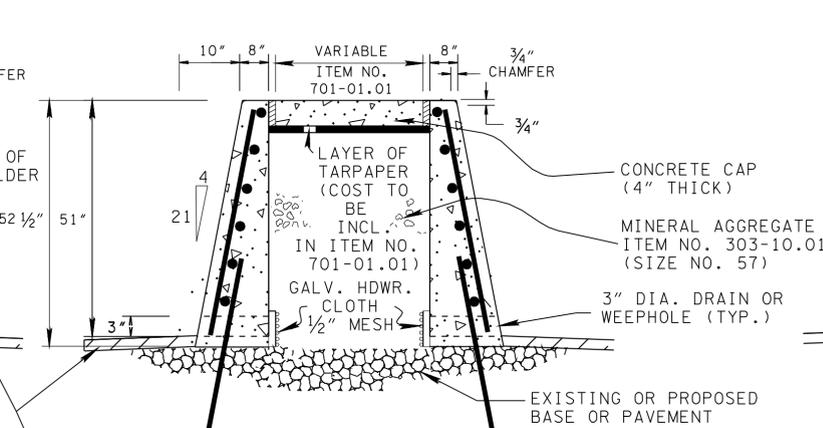


SECTION B-B (DETAIL BETWEEN PIERS AND IN TAPER)

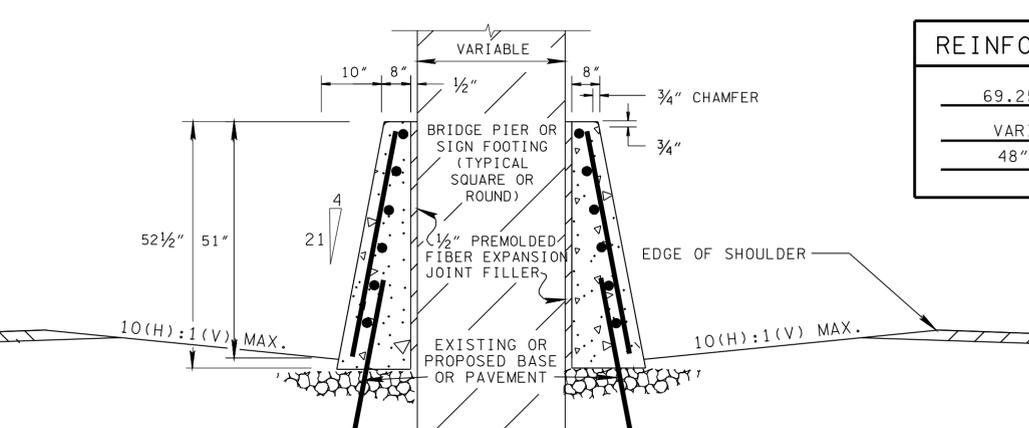

WIDE MEDIAN DETAIL

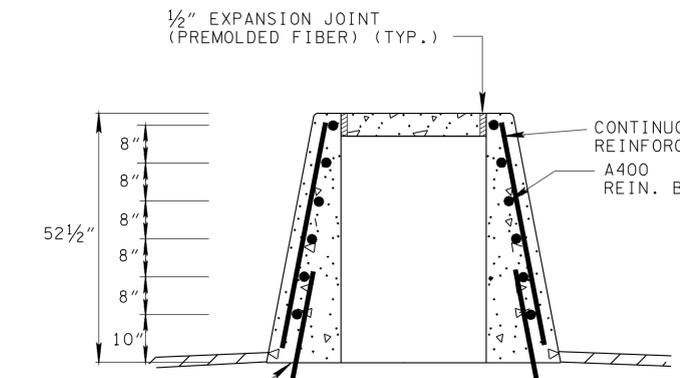

SECTION

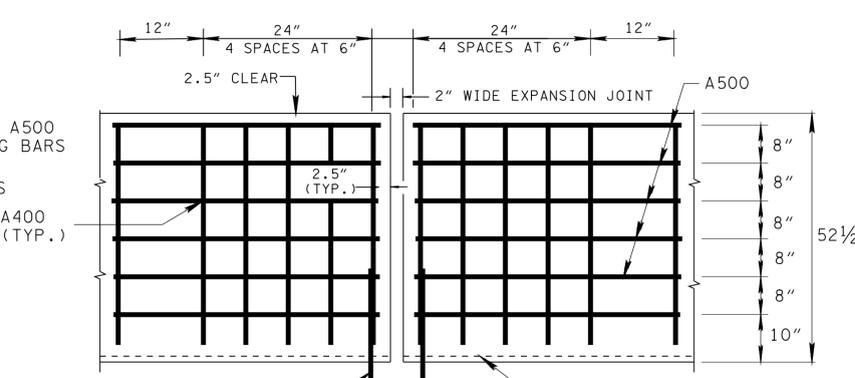

ELEVATION DETAILS OF REINFORCING AT EXPANSION JOINT

- GENERAL NOTES**
- (A) CONCRETE MEDIAN BARRIER SHALL BE CONSTRUCTED IN ACCORDANCE WITH STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, SECTION 711 AND/OR CURRENT SPECIAL PROVISIONS.
 - (B) SEE STANDARD DRAWING NO. S-SSMB-3 FOR ADDITIONAL DETAILS AND GENERAL NOTES REGARDING CONCRETE AND STEEL SPECIFICATIONS, CONTRACTION AND EXPANSION JOINTS, TEXTURE FINISH, DELINEATORS, AND WEEP HOLES
 - (C) SEE STANDARD DRAWING S-MB-1 FOR DETAILS AND REQUIREMENTS FOR MEDIAN BARRIER DELINEATOR. MEDIAN BARRIER DELINEATORS WILL NOT BE REQUIRED IN AREAS WHERE ROADWAY IS LIGHTED.
 - (D) ALONG TOP EDGES OF CONCRETE MEDIAN BARRIER THE CONTRACTOR MAY USE 3/4" RADIUS IN LIEU OF 3/4" CHAMFER SHOWN ON THIS DRAWING.
 - (E) MAXIMUM SLOPE IN FRONT OF SINGLE SLOPE MEDIAN BARRIER WALL SHALL BE 10(H):1(V)
 - (F) PAYMENT WILL BE MADE UNDER ITEM NO. 711-05.77, FLARED SINGLE SLOPE CONCRETE MEDIAN BARRIER WALL PER LINEAR FOOT.