



December 9, 2019

PRODUCT AND PRICING BULLETIN

NEW HOLLAND BRAND PRODUCTS, U.S. NO. 19-62A

NEW HOLLAND AG DEALERS WITH MRT AGREEMENT

SUBJECT: POWERSTAR™ SERIES: PRICE & DATA PAGES EFFECTIVE 12/09/2019

The agricultural industry is constantly evolving to meet the world's shifting needs. Here at New Holland, we're focused on matching pace with those changes to help you get the job done. Together, we can make our customers' jobs easier and raise industry standards along the way.

The interior right hand trim around the gear and range levers and mid mount joystick of all PowerStar tractors will be changing to enhance operator comfort. The new trim will be phased in as new mid mount valve and joystick order codes and there will be no change in the price.

This change will be rolled out as a running change in production at the plant through February 2020 as listed in the chart below. Some orders in the system have already been changed to the new codes as reflected below:

PowerStar 75					
Old Order Code		New Order Code		Version	Production phase In
390124	LESS MID MOUNTS	762164	LESS MID MOUNTS - NEW TRIM	Cab	February 2020
338125	2 MID MOUNTS - JOYSTICK - SWITCH 3rd FUNCTION	762166	2 MID MOUNTS - NEW TRIM - JOYSTICK - SWITCH 3rd FUNCTION	Cab	February 2020
336780	2 MID MOUNTS - JOYSTICK - SWITCH 3rd FUNCTION - LOADER DIVERTER	762167	2 MID MOUNTS - NEW TRIM - JOYSTICK - SWITCH 3rd FUNCTION - LOADER DIVERTER	Cab	February 2020
Powerstar 90, 100, 110, 120					
Old Order Code		New Order Code		Version	Production phase In
390124	LESS MID MOUNTS	762164	LESS MID MOUNTS - NEW TRIM	ROPS	December 2019
				Cab	November 2019
338125	2 MID MOUNTS - JOYSTICK - SWITCH 3rd FUNCTION	762166	2 MID MOUNTS - NEW TRIM - JOYSTICK - SWITCH 3rd FUNCTION	ROPS	December 2019
				Cab	November 2019
336780	2 MID MOUNTS - JOYSTICK - SWITCH 3rd FUNCTION - LOADER DIVERTER	762167	2 MID MOUNTS - NEW TRIM - JOYSTICK - SWITCH 3rd FUNCTION - LOADER DIVERTER	ROPS	December 2019
				Cab	November 2019

Please refer to the attachments for details on the specific changes to the trim and updated price and data pages that incorporate the new order codes.

This bulletin and the price pages may be accessed via the Dealer Portal if you have the MRT agreement with New Holland. Log on to the Dealer Portal. With the "Wholegoods" button displayed, click on "Pricing," click on "Tractors," and then click on "PowerStar Series." The latest published items will appear at the top of the list. Please replace your current P&D pages with those attached to this bulletin.

Seth Wilson
Director, Sales Operation Support
& Government Accounts
New Holland, North America

Dan Valen
Director, Product Marketing
New Holland, North America

Attachment



PowerStar trim changes:


- Cab with mid mount valve:

Old



- Curved trim
- No net pocket or USB port


New

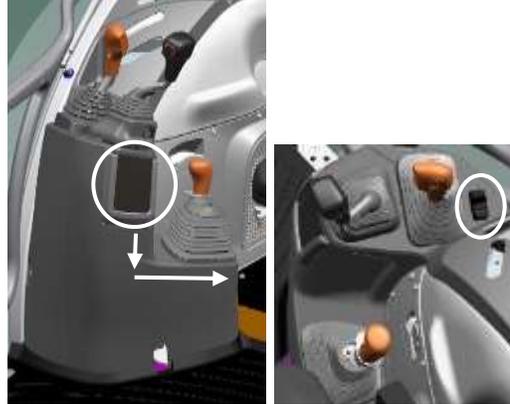

- Square trim
- Net pocket for Cell phone
- USB charging ports


- Cab LESS mid mount valve:

Old

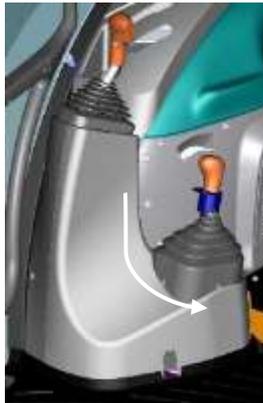

- Curved trim
- No net pocket or USB port

New

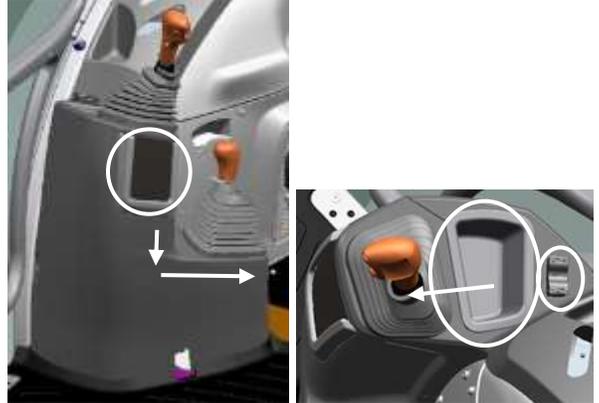

- Square trim
- New gear lever position
- Storage pocket to right of gear lever
- Net pocket for Cell phone
- USB charging ports


○ ROPS with mid mount valve:

Old



- Curved trim
- No net pocket or USB port


New

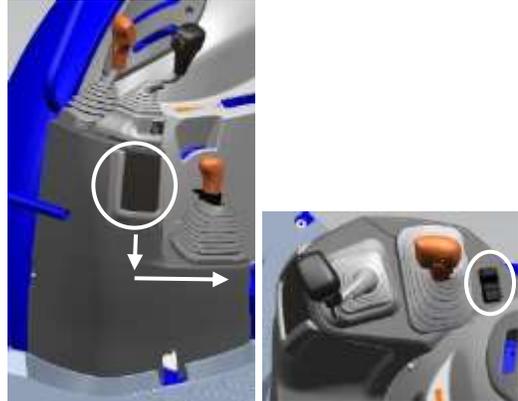

- Square trim
- Net pocket for Cell phone
- USB charging ports


○ Cab LESS mid mount valve:

Old

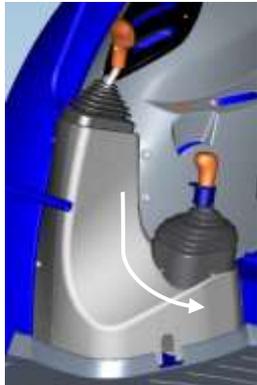

- Curved trim
- No net pocket or USB port

New

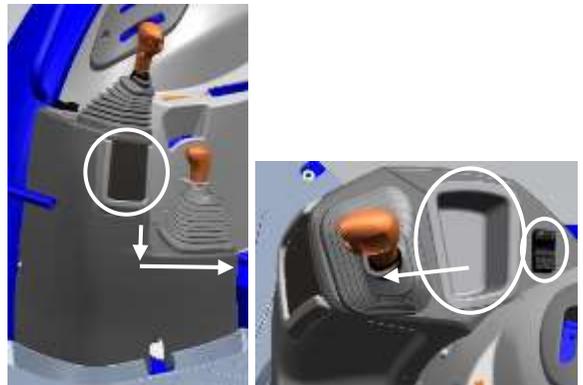

- Square trim
- New gear lever position
- Storage pocket to right of gear lever
- Net pocket for Cell phone
- USB charging ports



PowerStar Series Tractor Index

<u>EQUIPMENT DESCRIPTION</u>	<u>LATEST REVISION</u>	<u>PAGE NUMBER</u>
<u>Index</u>	02/01/20	1
<u>Models</u>		
PowerStar 75 - STANDARD FAST PICK	02/01/20	2
PowerStar 75 - A LA CARTE	02/01/20	7
Parts Divising Supplied Accessories - PowerStar 65, 75	02/01/20	13
Tire Chart - PowerStar 65, 75	02/01/20	14
PowerStar 90, 100, 110, 120 - Power Shuttle - UTILITY FAST PICK	02/01/20	15
PowerStar 90, 100, 110, 120 - Power Shuttle - STANDARD FAST PICK	02/01/20	21
PowerStar 90, 100, 110, 120 - Power Shuttle - KLASSIC FAST PICK	02/01/20	28
PowerStar 90, 100, 110, 120 - Power Shuttle - A LA CARTE CAB	02/01/20	34
PowerStar 90, 100, 110, 120 - Power Shuttle - A LA CARTE ROPS	02/01/20	43
Parts Divising Supplied Accessories - PowerStar 90, 100, 110, 120	02/01/20	52
Tire Chart - PowerStar 90, 100, 110, 120	02/01/20	53



**POWERSTAR 75 STANDARD FAST PICK
US PRICE LIST**

Standard Equipment

KEY SELLING POINTS:

- CommandArc™ ergonomically places most frequently used controls to operator's right
- Ten repositionable vents for heating and air conditioning
- 12x12 Transmission
- Hydraulic shuttle lever
- Full-size instructor seat
- Hi Visibility Panel
- Lift-O-Matic Plus
- Tier 4B EPA emissions compliant
- Factory Installed Loader

DIESEL ENGINE

- PowerStar 75
- 74 Gross Engine hp
- 65 PTO hp @ 2300 rpm
- 4 Cyl Turbocharged Engine
- 207 cu in (3.4 L) Displacement

ALL MODELS

- US EPA Tier 4B Emissions Compliant
- Bosch Fuel Injection Pump
- Electric Engine Shutoff
- Hand and Foot Throttle Controls
- Grid Heater Starting Aid
- Air Cleaner: Dry Type with Safety Element
- Under Hood Muffler
- Vertical Exhaust
- Fuel Sediment Filter with Water Sensor
- 23.8 gal Fuel Tank w/ Protection Shield
- Parking brake

TRANSMISSION

- Wet Clutch
- LH side steering column mounted shuttle
- 12 Forward and 12 Reverse Speeds (4) Synchronized Gears (3) Non-synchronized Ranges
- Forward Reverse Power Shuttle
- FWD - 25 mph (40 kph)
- Speed varies with tire selection

AXLES

- FWD FRONT AXLE**
- Electro-Hydraulic engagement standard
- Adjustable Tread Width from 60.8 in. to 76.6 in.
- Limited Slip Differential Lock
- Standard FAS Ready

REAR AXLE

- Flange Type
- Adjustable Tread Width 52.2 in. to 76.0 in.
- Rear Differential Lock - FWD mechanically engaged.

HYDRAULIC SYSTEM

- Open Center System
- (2) Open Center Valves with detent
- 2 Function mid mount valve and joystick
- Dual Gear Pumps
 - Implement Pump: 12.5 gpm (47.5 L)
 - Steering Pump: 7.3 gpm (27.5 L)
 - Total Flow: 19.8 gpm (75 L)

PTO

- 540 rpm Hydraulic PTO (1-3/8 in. 6 splines)
- Fully Independent, wet clutch
- Hydraulic engagement
- Flip-up PTO Shaft Guard



**POWERSTAR 75 STANDARD FAST PICK
US PRICE LIST**

Standard Equipment

HITCH

3-point Category II with flex lower links
and telescoping stabilizers
Lift-O-Matic Plus rear hitch control
3664 lbs. Lift Capacity (SAE)
Swinging Drawbar
Mechanical Draft Control
Upper Link Draft Sensing
3-Point Hitch Ground Control

STEERING/BRAKES

Hydrostatic Power Steering
Brakes-
Wet disk brakes
Hydraulically assisted

INSTRUMENTATION

Analog Instrumentation with warning
lights for air cleaner service,
alternator, oil pressure, fuel
sediment/water sensor, PTO
engagement, head light high beam,
low fuel and parking brake, digital
speed readout, gauges for fuel level,
engine temperature, tachometer and
hour meter

ELECTRICAL

(1) 800 cca Heavy-duty Battery
Alternator: 120 amp
7-pin Outlet for trailer/implement lighting
and signals
4-pin Power Outlet (30 amp)
8 amp single pole
2 Auxiliary power sockets
(cigarette lighter)

LIGHTING

Front: (2) Halogen Headlights and
(2) cab mounted worklights
Rear: (2) cab mounted worklights
Turn Signals/Flashers/Rear Lights

OPERATOR PROTECTIVE STRUCTURE

ROPS protected, flat deck platform with
heat and air conditioning, tinted
windshield, retractable sun screen,
front and rear wiper and washer,
two doors with locks, two external
mirrors, openable side windows,
hinged rear window (fully opens)
High Visibility Panel
Steering Wheel - adjustable tilt
Seat - Cloth covered with air
suspension and 10 degrees of swivel,
operator's presence sensor, retractable
seat belt and arm rests
Instructor Seat
Suspended pedals
Radio, speakers, and antenna

MISCELLANEOUS

Pivoting Engine Hood
SMV Emblem
Rear wheel weights
Toolbox

WARRANTY

New Holland Standard Warranty Applies



**POWERSTAR 75 STANDARD FAST PICK
US PRICE LIST**

Standard Equipment

LOADER:

655TL/710LU NON SELF-LEVELING

Maximum Lift Height @ pivot pin: 127.2"

Dump Clearance: 94.4"

Digging Depth: 6.4"

Lift Capacity

Max Height @ 800mm: 2,478 LBS

59" high @ 800mm: 3,080 LBS

Breakout Force @ 800mm: 3,739 LBS

Reach @ Max Lift Height: 39.5"

Reach @ Ground Level: 90.7"

Bucket Rollback Angle: 45 degrees

Bucket Dump Angle: 60 degrees

Skid Steer style bucket attach

655TL/715LU SELF-LEVELING

Maximum Lift Height @ pivot pin: 127.2"

Dump Clearance: 94.4"

Digging Depth: 6.4"

Lift Capacity

Max Height @ 800mm: 3,179 LBS

59" high @ 800mm: 4,665 LBS

Breakout Force @ 800mm: 3,860 LBS

Reach @ Max Lift Height: 39.5"

Reach @ Ground Level: 90.7"

Bucket Rollback Angle: 40 degrees

Bucket Dump Angle: 60 degrees

Skid Steer or Euro style bucket attach



**POWERSTAR 75 STANDARD FAST PICK
US PRICE LIST**

Models

COMMERCIAL MODEL	VERSION	ENGINE POWER	Weight	Factory Data	List Price
POWERSTAR 75	Cab	75 HP	7,996 LB	9053829P36	\$69,012.00
Includes the following Equipment					
11.2R24 R1W (8232404) \$1,161.00					
16.9R30 R1W (8355404) \$2,530.00					

Factory Supplied Options

Order Code	Description	Weight	Factory Data	List Price
------------	-------------	--------	--------------	------------

PACKAGE SELECTION

SD_T9980 PACKAGING

	X99803X	STANDARD PACKAGING Standard Package and Pricing Includes: 84 inch bucket 4 x 110 lb Rear Wheel Weights Requires one selection for each of the following: Mid mount valve and joystick: 2 Function mid mount valve and joystick or 2 Function mid mount valve and joystick + 3rd function diverter Loader: 655TL loader (select one)		(901328P34)	(\$1,703.00)
--	---------	--	--	-------------	--------------

HYDRAULICS

MID-MOUNT

SD_T8280 MID-MOUNT VALVES

	762166	MID+JOY+3FNCTN+NEW 2 function mid-mount valve and joystick.			No Charge
	762167	MID+JOY+3FNC+DIV+NEW 2 function mid-mount valve and joystick with 3rd function diverter. Requires a 655TL Loader. Bucket with Grapple NOT AVAILABLE as Factory Installed.		9000585P00	\$750.00



**POWERSTAR 75 STANDARD FAST PICK
US PRICE LIST**

LOADER

LOADER

SD_T8110 LOADER BRACKETS

Standard Duty Loader					
	336914	Non Self Leveling Ldr +SSQA 655TL/710LU Non Self Leveling with Skid Steer Attachment			No Charge
	336734	Mech Self Leveling Ldr +SSQA 655TL/715LU Mechanical Self Leveling with Skid Steer Style Attachment		9000872P82	\$1,119.00

OPERATOR'S MANUALS

SD_T9840 COUNTRY CONFIGURATION

	334256	Canada (FR) Config ROPS			No Charge
	334257	USA Spanish Configuration			No Charge



**POWERSTAR 75 A LA CARTE
US PRICE LIST**

Standard Equipment

KEY SELLING POINTS:

- CommandArc™ ergonomically places most frequently used controls to operator's right
- Ten repositionable vents for heating and air conditioning
- 12x12 Transmission
- Mechanical or hydraulic shuttle lever
- Full-size instructor seat option
- Hi Visibility Panel Option
- Tier 4B EPA emissions compliant
- Factory Installed Loader

DIESEL ENGINE

- PowerStar 75
- 74 Gross Engine hp
- 65 PTO hp @ 2300 rpm
- 4 Cyl Turbocharged Engine
- 207 cu in (3.4 L) Displacement

ALL MODELS

- US EPA Tier 4B Emissions Compliant
- Bosch Fuel Injection Pump
- Electric Engine Shutoff
- Hand and Foot Throttle Controls
- Grid Heater Starting Aid
- Air Cleaner: Dry Type with Safety Element
- Under Hood Muffler
- Vertical Exhaust
- Fuel Sediment Filter with Water Sensor
- 23.8 gal Fuel Tank w/ Protection Shield
- Parking brake

TRANSMISSION

- Wet Clutch
- LH side steering column mounted shuttle
- 12 Forward and 12 Reverse Speeds
- (4) Synchronized Gears
- (3) Non-synchronized Ranges
- Forward Reverse Power Shuttle
- FWD - 25 mph (40 kph)
- Speed varies with tire selection

AXLES

- 2WD HD FRONT AXLE - PowerStar 75
- Inverted U-section type
- Adjustable Tread Width from 57.0 in. to 79.7 in.

FWD FRONT AXLE

- Electro-Hydraulic engagement standard
- Adjustable Tread Width from 60.8 in. to 76.6 in.
- Limited Slip Differential Lock

REAR AXLE

- Flange Type
- Adjustable Tread Width 52.2 in. to 76.0 in.
- Rear Differential Lock - 2WD and FWD mechanically engaged.

HYDRAULIC SYSTEM

- Open Center System
- (2) Open Center Valves with detent
- 2 Function mid mount valve and joystick
- Dual Gear Pumps
 - Implement Pump: 12.5 gpm (47.5 L)
 - Steering Pump: 7.3 gpm (27.5 L)
 - Total Flow: 19.8 gpm (75 L)

PTO

- 540 rpm Mechanical PTO
- (1-3/8 in. 6 splines)
- Fully Independent, wet clutch
- Hydraulic Engagement
- Flip-up PTO Shaft Guard



**POWERSTAR 75 A LA CARTE
US PRICE LIST**

Standard Equipment

HITCH

3-point Category II with flex lower links
and telescoping stabilizers
3664 lbs. Lift Capacity (SAE)
Lift-O-Matic Plus
3-Point Hitch Ground Control
Swinging Drawbar
Mechanical Draft Control
Upper Link Draft Sensing

STEERING/BRAKES

Hydrostatic Power Steering
Brakes-
Wet disk brakes
Hydraulically assisted

INSTRUMENTATION

Analog Instrumentation with warning
lights for air cleaner service,
alternator, oil pressure, fuel
sediment/water sensor, PTO
engagement, head light high beam,
low fuel and parking brake, digital
speed readout
Gauges for fuel level, engine
temperature, tachometer and hour
meter

ELECTRICAL

(1) 800 cca Heavy-duty Battery
Alternator: 120 amp
7-pin Outlet for trailer/implement lighting
and signals
4-pin Power Outlet (30 amp)
8 amp single pole
Auxiliary power socket (cigarette lighter)

LIGHTING

Front: (2) Halogen Headlights and
(2) cab mounted worklights
Rear: (2) cab mounted worklights
Turn Signals/Flashers/Rear Lights

OPERATOR PROTECTIVE STRUCTURE

ROPS protected, flat deck platform with
heat and air conditioning, tinted
windshield, retractable sun screen,
front wiper and washer, two doors
with locks, two external mirrors,
openable side windows, hinged rear
window (fully opens)
High Visibility Pane
Steering Wheel - adjustable tilt
Seat - Cloth covered with air
suspension and 10 degrees of swivel,
operator's presence sensor, retractable
seat belt and arm rests
Instructor Seat
Suspended pedals
Radio, speakers, and antenna

MISCELLANEOUS

Pivoting Engine Hood
SMV Emblem
Toolbox
Toolbox on ROPS unit located in fenders

WARRANTY

New Holland Standard Warranty Applies



**POWERSTAR 75 A LA CARTE
US PRICE LIST**

Standard Equipment

LOADER:

655TL/710LU NON SELF-LEVELING

Maximum Lift Height @ pivot pin: 127.2"

Dump Clearance: 94.4"

Digging Depth: 6.4"

Lift Capacity

Max Height @ 800mm: 2,478 LBS

59" high @ 800mm: 3,080 LBS

Breakout Force @ 800mm: 3,739 LBS

Reach @ Max Lift Height: 39.5"

Reach @ Ground Level: 90.7"

Bucket Rollback Angle: 45 degrees

Bucket Dump Angle: 60 degrees

Skid Steer or Euro style bucket attach

655TL/715LU SELF-LEVELING

Maximum Lift Height @ pivot pin: 127.2"

Dump Clearance: 94.4"

Digging Depth: 6.4"

Lift Capacity

Max Height @ 800mm: 3,179 LBS

59" high @ 800mm: 4,665 LBS

Breakout Force @ 800mm: 3,860 LBS

Reach @ Max Lift Height: 39.5"

Reach @ Ground Level: 90.7"

Bucket Rollback Angle: 40 degrees

Bucket Dump Angle: 60 degrees

Skid Steer or Euro style bucket attach



**POWERSTAR 75 A LA CARTE
US PRICE LIST**

Models

COMMERCIAL MODEL	VERSION	ENGINE POWER	Weight	Factory Data	List Price
POWERSTAR 75	Cab	75 HP	7,996 LB	9053829P36	\$69,012.00
Includes the following Equipment					
11.2R24 R1W (8232404) \$1,161.00					
16.9R30 R1W (8355404) \$2,530.00					

Factory Supplied Options

Order Code	Description	Weight	Factory Data	List Price
------------	-------------	--------	--------------	------------

PACKAGE SELECTION

SD_T9980 PACKAGING

X99801X	Custom Configuration			No Charge
---------	----------------------	--	--	-----------

POWER TRAIN

AXLES

SD_T4010 FRONT AXLE

336858	2WD Standard Axle Heavy Duty Requires 20 MPH (30 KPH) Compatible with 655TL Requires rear wheel weights (330470) ONLY when ordered with 655TL PowerStar 75 ONLY		(900861P90)	(\$1,105.00)
744580	4WD Electro Hyd Limited Slip Electro-hydraulic 4WD engagement			No Charge

TIRES

FRONT

SD_T4940 FRONT WHEELS AND TIRES

2WD Front Tires				
8125801	7.50-16 8 PLY HD		9000368P94	\$473.00
8126601	9.5L15 4 RIB 8 PLY		9000482P82	\$619.00



**POWERSTAR 75 A LA CARTE
US PRICE LIST**

4WD Radial Tires					
	8232404	11.2R24 R1W		9000905P58	\$1,161.00
4WD Specialty Tires					
	8290904	12.5/80-18 10PR R4		9001296P36	\$1,662.00
4WD Front Shipping Wheels					
	8299801	Non-Return Ship Wheels - 4WD		9000074P10	\$95.00

REAR

SD_T4950 REAR WHEELS AND TIRES

Radial Tires					
	8355404	16.9R30 R1W 4WD Front Tire - 11.2R24 (8232404) 2WD Front Tire - 9.5L15 4 Rib (8126601) or 7.5-16 (8125801)		9001973P40	\$2,530.00
Specialty Tires					
	8391904	19.5L-24 10 PR R4 4WD Front Tire - 12.5/80-18 (8290904)		9002006P94	\$2,573.00
Rear Shipping Wheels					
	8399801	Non-Returnable Shipping Wheel		9000443P04	\$568.00

HYDRAULICS

MID-MOUNT

SD_T8280 MID-MOUNT VALVES

	762166	MID+JOY+3FNCTN+NEW 2 function mid-mount valve and joystick.			No Charge
	762167	MID+JOY+3FNC+DIV+NEW 2 function mid-mount valve and joystick with 3rd function diverter. Requires a 655TL Loader. Bucket with Grapple NOT AVAILABLE as Factory Installed.		9000585P00	\$750.00

LOADER

LOADER

SD_T8110 LOADER BRACKETS

Standard Duty Loader					
	336914	Non Self Leveling Ldr +SSQA 655TL/710LU Non Self Leveling with Skid Steer Attachment			No Charge
	336734	Mech Self Leveling Ldr +SSQA 655TL/715LU Mechanical Self Leveling with Skid Steer Style Attachment		9000872P82	\$1,119.00
	743593	Less Front Loader		(904773P60)	(\$6,120.00)



**POWERSTAR 75 A LA CARTE
US PRICE LIST**

SD_T8140 BUCKET

		XT8140X	Less Bucket		(900742P56)	(\$952.00)
		336750	84" Bucket			No Charge

WEIGHTS

FRONT

SD_T2150 FRONT BALLAST

		333215	Front Carrier +6 88 lb Weights		9000658P32	\$844.00
			Total weight - 661 lbs (300 kg)			
		390215	Less Front Carrier and Weights			No Charge

REAR

SD_T4961 REAR BALLAST

		330470	4 x 110 lb Rear Wheel Weights		9000503P10	\$645.00
		XT4961X	Standard less rear ballast			No Charge

OPERATOR'S MANUALS

SD_T9840 COUNTRY CONFIGURATION

		334256	Canada (FR) Config ROPS			No Charge
		334257	USA Spanish Configuration			No Charge

PARTS DIVISION SUPPLIED ACCESSORIES FOR POWERSTAR 65, 75 TRACTORS

Part Number	Description	PowerStar 75	PowerStar 65, 75	Notes
	HYDRAULICS	ROPS	CAB	
719108250	Second rear remote valve with lever control	X	X	
719195250	Third rear remote valve with lever control	X	X	Tractor must have 2nd rear remote valve installed.
719405250	First rear remote valve flow control	X	X	Tractor must have 2nd rear remote valve installed. Not compatible with 3 rear remote valves.
719124250	Two mid mount valves with joystick control	X	X	Includes trim kit
TBD	Two mid mount valves with joystick control - NEW TRIM	X	X	Includes trim kit (NOT COMPATIBLE WITH TIER 4A or TIER 4B WITH OLD TRIM STYLE)
SML362492	Fitting for low pressure direct sump return line when using hydraulic powered implements such as post drivers or hydraulic motors.	X	X	3/4 inch - 14BSPP to 5/8 JIC 37 degree flare male fitting
86593621	Fitting for low pressure direct sump return line when using hydraulic powered implements such as post drivers or hydraulic motors.	X	X	3/4 inch - 14BSPP to 3/4 JIC 37 degree flare male fitting
	WEIGHTS			
710225250	Front End weight bracket	X	X	
710226250	6 Front Weights 88 lbs each (528 lbs total)	X	X	Requires front end weight bracket #710225250
710471250	4 Rear Wheel Weights 110 lbs each (440 lbs total)	X	X	For 28" and 30" rear wheels
710465250	6 Rear Wheel Weights 70 lbs each (420 lbs total)	X	X	For 24" wheels
	ELECTRICAL			
710762251	Rotary Beacon Kit	X		Connects to 12V power socket
710462252	Rotary Beacon Kit		X	Connects to 12V power socket
719216250	Engine Block Heater Kit			
81864735	4 Pin Outlet (25 amp) Electrical Plug			
86508819	Single Pin Male (8 amp) Electrical Plug			
718122950	Back Up Alarm		X	
	PLATFORM			
718130050	Monitor Mounting Bracket		X	Requires Cab
718462250	White Canopy	X		FOPS Compliant
718463250	Blue Canopy	X		FOPS Compliant
	LOADER			
	DIA	X	X	See 600TL Series Loader Price and Data Pages
	3rd Function Diverter Valve	X	X	NOT AVAILABLE AS DIA
715824136	Grill Guard Insert			Order from 600TL Series Loader Price and Data Pages
	MISCELLANEOUS			
710167250	Front Fenders 310mm	X	X	Requires 4WD - 11.2R20 or 11.2 - 24 or 11.2R24 or 12LLx16 or 12.5/80-18 or 300/70R20 or 320/70R20 or 320/70R24
719429250	Bolt-on Cutting Edge for 72" Bucket	X	X	
719430250	Bolt-on Cutting Edge for 84" Bucket	X	X	

PowerStar 75 Tire Chart

Tire Type	Application	Rear Tires		Matching 4WD Front Tires	
		Tire	Order Code	Tire	Order Code
Radial	Agricultural - R1W	16.9R30	8355404	11.2R24	8232404
Specialty	Industrial - R4	19.5L24	8391904	12.5/80-18	8290904



**POWERSTAR 90-120 PS UTILITY FAST PICK
US PRICE LIST**

Standard Equipment

KEY SELLING POINTS:

- CommandArc™ ergonomically places most frequently used controls to operator's right
- Ten repositionable vents for heating and air conditioning
- Full-size instructor seat
- Hydraulic shuttle lever
- 3.4L, 4-cylinder, 16 valve F5G engines with common rail fuel injection system
- Tier 4B EPA emissions compliant with Selective Catalytic Reduction (SCR) & Cooled Exhaust Gas Recirculation (CEGR)
- Factory Installed NSL SSL Loader

PowerStar 90
86 Gross Engine hp
73 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 100
99 Gross Engine hp
85 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 110
107 Gross Engine hp
93 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 120
117 Gross Engine hp
100 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

ALL MODELS:

- Tier 4B Emissions Compliant:
(SCR + CEGR)
- Electronic Injection Bosch High-pressure Common Rail System
- Electric Engine Shutoff
- Hand and Foot Throttle Controls
- Grid Heater Starting Aid
- Dual Element Air Filter
- Constant Engine RPM
- Vertical Exhaust
- 30.3 gal Fuel Tank with Guard
- 2.8 gal AdBlue DEF Tank
- Parking brake

TRANSMISSION:

- LH side steering column mounted
- Power Shuttle
- 12 Forward and 12 Reverse Speeds
(4) Synchronized Gears
(3) Non-synchronized Ranges
- Forward Reverse Synchronized Shuttle
- 19 mph (30 kph)
Speed varies with tire selection

STEERING/BRAKES:

- Hydrostatic Power Steering
- Brakes-
 - Wet disk brakes
 - Hydraulically assisted

AXLES:

- FRONT - 4WD
- Limited Slip
- PowerStar 90, 100 & 110:
 - Electrohydraulic FWD Engagement
 - Adjustable Tread Width from 56.6 in to 76.6 in.
- PowerStar 120:
 - Heavy Duty Electrohydraulic FWD Engagement
 - Adjustable Tread Width from 56.6 in. to 76.6 in.

**POWERSTAR 90-120 PS UTILITY FAST PICK
US PRICE LIST**

Standard Equipment

AXLES Continued:

REAR

- PowerStar 90, 100 & 110:
Flange Type
Adjustable Tread Widty 55.5 in to
76.2 in.
- PowerStar 120:
Heavy Duty Flange Type
Adjustable Tread Width 55.5 in.
to 76.2 in.
- 4 x 110 lb Rear Wheel Weights

HYDRAULIC SYSTEM:

- Open Center System
- Dual Gear Pumps
 - Implement Pump: 16.9 gpm (63.9 L)
 - Steering Pump: 9.7 gpm (37.0 L)
 - Total Flow: 26.6 gpm (100.8 L)
- (2) Open Center Remote Valves with
detent
- 2 Function Mid Mount Valve and Joystick

REAR DIFFERENTIAL LOCK:

Mechanically Engaged

PTO:

- Fully Independent
- Flip-up PTO Shaft Guard
- PowerStar 90, 100 & 110:
540 rpm Hydraulic
- PowerStar 120:
540/1000 rpm Hydraulic
 - Electronic engagement
 - Wet clutch
- 1-3/8 in. 6 splines

3-POINT LIFT SYSTEM:

- Right hand console mounted
lever control
- Mechanical Draft Control
- Rear 3 Point Hitch Control
- 5,620 Pounds Lift Capacity
- Category II Ends
- Telescopic Stabilizers
- Flexible Lower Link Ends

ELECTRICAL:

- (1) 800 cca Heavy-Duty Battery - Cab
- 120 amp Alternator
- 7-pin Outlet for trailer/implement lighting
and signals
- 3-pin Power Outlet (30 amp)
- Single Pin (8 amp) Accessory Power
outlet
- 12V power socket

INSTRUMENTATION:

- Analog Instrumentation with warning
lights for air cleaner service,
alternator, oil pressure, fuel
sediment/water sensor, PTO
engagement, head light high beam,
low fuel and parking brake,
digital speed readout
- Gauges for fuel level, engine
temperature, tachometer and hour
meter

LIGHTING:

- Front: (2) Halogen Headlights and
(2) cab mounted worklights
- Rear: (2) cab mounted worklights
- Turn Signals/Flashers/Rear Lights

OPERATOR PROTECTIVE STRUCTURE:

- CAB MODELS**
- ROPS protected, flat deck platform
with heat and air conditioning, tinted
windshield, retractable sun screen,
front and rear wiper and washer, two
doors with locks, two external mirrors,
openable side windows, hinged rear
window (opens completely)
- Steering Wheel - adjustable tilt
- Seat - Cloth covered with air
suspension and 10 degrees of swivel,
operator's presence sensor, retractable
seat belt and arm rests
- Instructor Seat
- Suspended pedals
- Radio, speakers, and antenna



**POWERSTAR 90-120 PS UTILITY FAST PICK
US PRICE LIST**

Standard Equipment

MISCELLANEOUS:

Pivoting Engine Hood
SMV Emblem
Toolbox

WARRANTY:

New Holland Standard Warranty Applies

LOADER:

655TL/710LU NON SELF-LEVELING
Maximum Lift Height @ pivot pin: 126"
Dump Clearance: 93.6"
Digging Depth: 8.2"
Lift Capacity
 Max Height @ 800mm: 2,478 LBS
 59" high @ 800mm: 3,080 LBS
Breakout Force @ 800mm: 3,739 LBS
Reach @ Max Lift Height: 39.5"
Reach @ Ground Level: 90.7"
Bucket Rollback Angle: 45 degrees
Bucket Dump Angle: 60 degrees
Skid Steer Loader bucket attach



**POWERSTAR 90-120 PS UTILITY FAST PICK
US PRICE LIST**

Models

COMMERCIAL MODEL	VERSION	Weight	Factory Data	List Price
POWERSTAR 90	Cab	8,157 LB	9058550P70	\$75,065.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 100	Cab	10,031 LB	9060469P50	\$77,525.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 110	Cab	8,157 LB	9062552P88	\$80,196.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 120	Cab	8,158 LB	9065642P46	\$84,157.00
Includes the following Equipment				
4WD+EH Engage+Limited Slip (744581) \$277.00				
Heavy Duty Rear Axle (333411) \$665.00				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
540/1000 RPM PTO (743594) \$560.00				



**POWERSTAR 90-120 PS UTILITY FAST PICK
US PRICE LIST**

Factory Supplied Options

Order Code	Description	Weight	Factory Data	List Price
------------	-------------	--------	--------------	------------

PACKAGE SELECTION

SD_T9980 PACKAGING

	759310	UTILITY PACKAGE UTILITY Package and Pricing Includes: UTILITY package discount 12x12 Power shuttle transmission Deluxe cab with instructor seat 25 mph (40 kph) transmission speed 2 Function mid mount valve and joystick 655TL Non Self Leveling loader with SSL attachment 84" Bucket Rear 3 point hitch ground control Allows for choice of the following tires: 18.4-30 Rear with 12.4R24 Front R1 Bias ply OR 18.4-34 Rear with 14.9R24 Front R1 Bias ply Radial		9003281P46	\$4,207.00
--	--------	---	--	------------	------------

POWER TRAIN

AXLES

SD_T4010 FRONT AXLE

	744581	4WD+EH Engage+Limited Slip+HD Heavy-Duty Limited Slip Base equipment on PowerStar 120 Requires Heavy-Duty rear axle (333411)		9000216P06	\$277.00
--	--------	--	--	------------	----------

SD_T4810 REAR AXLE

	333411	Heavy Duty Rear Axle Heavy-Duty Rear Axle Base Equipment on PowerStar 120 Required for 34 & 38 inch rear tires NOT compatible with Standard-Duty 4WD front axles (743559 or 744580) NOT compatible with 30 inch or smaller rear tires on PowerStar 90, 100 or 110		9000518P70	\$665.00
--	--------	---	--	------------	----------



**POWERSTAR 90-120 PS UTILITY FAST PICK
US PRICE LIST**

TIRES

FRONT

SD_T4940 FRONT WHEELS AND TIRES

4WD Bias Front Tires						
		8235601	12.4-24 8PR		9000838P50	\$1,075.00
		8240604	14.9-24 8PR R1		9001265P16	\$1,622.00

REAR

SD_T4950 REAR WHEELS AND TIRES

Bias Rear Tires						
		8363801	18.4-30 12PR R1 FLAN 4WD Front Tire - 12.4-24 (8235601) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9002035P02	\$2,609.00
		8365501	18.4-34 10PR 4WD Front Tire - 14.9-24 (8240604) 2WD Front Tire - 10.00-16 (8125901)		9002242P50	\$2,875.00

PTO

REAR PTO

SD_T8010 PTO

		743594	540/1000 RPM PTO		9000436P80	\$560.00
--	--	--------	------------------	--	------------	----------

WEIGHTS

REAR

SD_T4961 REAR BALLAST

		330470	4 x 110 lb Rear Wheel Weights Total weight - 440 lbs (200 kg) NOT compatible with 24" rear tires option Required with 2WD HD front axle		9000498P42	\$639.00
--	--	--------	---	--	------------	----------

OPERATOR'S MANUALS

SD_T9840 COUNTRY CONFIGURATION

		334256	Canada (FR) Config ROPS French operator manual			No Charge
		334257	USA Spanish Configuration Spanish operator manual			No Charge

**POWERSTAR 90-120 PS STANDARD FAST PICK
US PRICE LIST**

Standard Equipment

KEY SELLING POINTS:

- CommandArc™ ergonomically places most frequently used controls to operator's right
- Ten repositionable vents for heating and air conditioning
- High visibility panel for better view of loader when at full height
- Full-size instructor seat
- Hydraulic shuttle lever
- 3.4L, 4-cylinder, 16 valve F5G engines with common rail fuel injection system
- Tier 4B EPA emissions compliant with Selective Catalytic Reduction (SCR) & Cooled Exhaust Gas Recirculation (CEGR)
- Factory Installed Loader

PowerStar 90

86 Gross Engine hp
73 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 100

98 Gross Engine hp
85 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 110

107 Gross Engine hp
93 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 120

117 Gross Engine hp
100 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

ALL MODELS:

- Tier 4B Emissions Compliant:
(SCR + CEGR)
- Electronic Injection Bosch High-pressure Common Rail System
 - Electric Engine Shutoff
 - Hand and Foot Throttle Controls
 - Grid Heater Starting Aid
 - Dual Element Air Filter
 - Constant Engine RPM
 - Vertical Exhaust
 - 30.3 gal Fuel Tank with Guard
 - 2.8 gal AdBlue DEF Tank
 - Parking brake

TRANSMISSION:

- LH side steering column mounted Power Shuttle
- 12 Forward and 12 Reverse Speeds (4) Synchronized Gears (3) Non-synchronized Ranges
- Forward Reverse Synchronized Shuttle
- 25 mph (40 kph)
- Speed varies with tire selection

STEERING/BRAKES:

- Hydrostatic Power Steering
- Brakes-
 - Wet disk brakes
 - Hydraulically assisted

AXLES:

- FRONT - 4WD
- Limited Slip
- Heavy Duty Electrohydraulic FWD Engagement
- Adjustable Tread Width from 56.6 in. to 76.6 in.

REAR

- Heavy Duty Flange Type
- Adjustable Tread Width 55.5 in. to 76.2 in.



**POWERSTAR 90-120 PS STANDARD FAST PICK
US PRICE LIST**

Standard Equipment

HYDRAULIC SYSTEM:

Open Center System
Dual Gear Pumps
 Implement Pump: 16.9 gpm (63.9 L)
 Steering Pump: 9.7 gpm (37.0 L)
 Total Flow: 26.6 gpm (100.8 L)
(2) Open Center Remote Valves with detent
2 Function Mid Mount Valve and Joystick

REAR DIFFERENTIAL LOCK:

Mechanically Engaged

PTO:

Fully Independent
Flip-up PTO Shaft Guard
540/1000 rpm Hydraulic
 -Electronic engagement
 -Wet clutch
1-3/8 in. 6 splines

3-POINT LIFT SYSTEM:

Right hand console mounted lever control
Lift-O-Matic Plus single lever control
3 Point Hitch Ground Control
Mechanical Draft Control
5,620 Pounds Lift Capacity
Category II Ends
Telescopic Stabilizers
Flexible Lower Link Ends

ELECTRICAL:

(1) 800 cca Heavy-Duty Battery - Cab
120 amp Alternator
7-pin Outlet for trailer/implement lighting and signals
3-pin Power Outlet (30 amp)
Single Pin (8 amp) Accessory Power outlet
(2) - 12V power sockets

INSTRUMENTATION:

Analog Instrumentation with warning lights for air cleaner service, alternator, oil pressure, fuel sediment/water sensor, PTO engagement, head light high beam, low fuel and parking brake, digital speed readout
Gauges for fuel level, engine temperature, tachometer and hour meter

CAB LIGHTING:

Front: (2) Halogen Headlights and (2) cab mounted worklights
Rear: (2) cab mounted worklights
Turn Signals/Flashers/Rear Lights

OPERATOR PROTECTIVE STRUCTURE:

CAB MODELS
ROPS protected, flat deck platform with heat and air conditioning, tinted windshield, retractable sun screen, front and rear wiper and washer, two doors with locks, two external mirrors, openable side windows, hinged rear window, high visibility panel
Steering Wheel - adjustable tilt
Seat - Cloth covered with air suspension and 10 degrees of swivel, operator's presence sensor, retractable seat belt and arm rests
Instructor Seat
Suspended pedals
Radio, speakers, and antenna

MISCELLANEOUS:

Pivoting Engine Hood
SMV Emblem
Toolbox

WARRANTY:

New Holland Standard Warranty Applies

**POWERSTAR 90-120 PS STANDARD FAST PICK
US PRICE LIST**

Standard Equipment

LOADER:

665TL/720LU NON SELF-LEVELING

Maximum Lift Height @ pivot pin: 134"
Dump Clearance: 101.4"
Digging Depth: 7"
Lift Capacity
Max Height @ 800mm: 2,632 LBS
59" high @ 800mm: 3,638 LBS
Breakout Force @ 800mm: 4,455 LBS
Reach @ Max Lift Height: 43"
Reach @ Ground Level: 91"
Bucket Rollback Angle: 44 degrees
Bucket Dump Angle: 60 degrees
Skid Steer style Loader bucket attach

665TL/725LU SELF-LEVELING

Maximum Lift Height @ pivot pin: 135"
Dump Clearance: 102.2"
Digging Depth: 6.4"
Lift Capacity
Max Height @ 800mm: 3,428 LBS
59" high @ 800mm: 5,549 LBS
Breakout Force @ 800mm: 5,661 LBS
Reach @ Max Lift Height: 43"
Reach @ Ground Level: 93
Bucket Rollback Angle: 40 degrees
Bucket Dump Angle: 60 degrees
Skid Steer or Euro style Loader
bucket attach



**POWERSTAR 90-120 PS STANDARD FAST PICK
US PRICE LIST**

Models

COMMERCIAL MODEL	VERSION	Weight	Factory Data	List Price
POWERSTAR 90	Cab	8,157 LB	9058550P70	\$75,065.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 100	Cab	10,031 LB	9060469P50	\$77,525.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 110	Cab	8,157 LB	9062552P88	\$80,196.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 120	Cab	8,158 LB	9065642P46	\$84,157.00
Includes the following Equipment				
4WD+EH Engage+Limited Slip (744581) \$277.00				
Heavy Duty Rear Axle (333411) \$665.00				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
540/1000 RPM PTO (743594) \$560.00				



**POWERSTAR 90-120 PS STANDARD FAST PICK
US PRICE LIST**

Factory Supplied Options

Order Code	Description	Weight	Factory Data	List Price
------------	-------------	--------	--------------	------------

PACKAGE SELECTION

SD_T9980 PACKAGING

	X99803X	STANDARD PACKAGING Standard Package and Pricing Includes: 12x12 Power shuttle transmission Deluxe cab with instructor seat and hi-vis panel 25mph (40 kph) speed Heavy Duty 4WD front axle Heavy Duty rear axle 84" Bucket 540/1000 RPM PTO Rear 3 point hitch ground control Lift-O-Matic Plus 4 x 110 lb Rear wheel weights Requires one selection for each of the following: Mid mount valve and joystick: 2 Function mid mount valve and joystick or 2 Function mid mount valve and joystick + 3rd function diverter Loader: 665TL loader (select one) Tires: 18.4R30 Rear with 12.4R24 Front R1W Radial OR 18.4R34 Rear with 14.9R24 Front R1W Radial		9006973P20	\$8,940.00
--	---------	---	--	------------	------------

TIRES

FRONT

SD_T4940 FRONT WHEELS AND TIRES

4WD Radial Tires					
	8235404	12.4R24 R1W		9001120P08	\$1,436.00
4WD Radial Front Tires					
	8239404	14.9R24 R1W		9001686P36	\$2,162.00

**POWERSTAR 90-120 PS STANDARD FAST PICK
US PRICE LIST**

REAR

SD_T4950 REAR WHEELS AND TIRES

Radial Rear Tires					
	8357404	18.4R30 R1W 4WD Front Tire - 12.4R24 (8235404) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9002714P40	\$3,480.00
	8365404	18.4R34 R1W 4WD Front Tire - 14.9R24 (8239404) 2WD Front Tire - 10.00-16 (8125901)		9002939P04	\$3,768.00

HYDRAULICS

MID-MOUNT

SD_T8280 MID-MOUNT VALVES

	762166	MID+JOY+3FNCTN+NEW 2 function mid-mount valve and joystick			No Charge
	762167	MID+JOY+3FNC+DIV+NEW 2 function mid-mount valve and joystick with 3rd function diverter Requires a Loader Bucket with Grapple NOT AVAILABLE as Factory Installed		9000596P70	\$765.00

LOADER

LOADER

SD_T8110 LOADER BRACKETS

Heavy Duty Loader					
	336740	HD Non Self Leveling Ldr +SSQA 665TL/720LU Non Self Leveling with Skid Steer Style Attachment			No Charge
	336744	HD Self Leveling Ldr +SSQA 665TL/725LU Mechanical Self Leveling with Skid Steer Style Attachment		9000894P66	\$1,147.00
	336746	HD Self Leveling Ldr +Euro 665TL/725LU Mechanical Self Leveling with Euro Style Attachment		9000894P66	\$1,147.00

OPERATOR'S MANUALS

SD_T9840 COUNTRY CONFIGURATION

	334256	Canada (FR) Config ROPS French operator manual			No Charge
--	--------	--	--	--	-----------



**POWERSTAR 90-120 PS STANDARD FAST PICK
US PRICE LIST**

		334257	USA Spanish Configuration Spanish operator manual				No Charge
--	--	--------	---	--	--	--	-----------



**POWERSTAR 90-120 PS KLASIK FAST PICK
US PRICE LIST**

Standard Equipment

KEY SELLING POINTS:

- CommandArc™ ergonomically places most frequently used controls to operator's right
- Ten repositionable vents for heating and air conditioning
- High visibility panel for better view of loader when at full height
- Full-size instructor seat
- Hydraulic shuttle lever
- 3.4L, 4-cylinder, 16 valve F5G engines with common rail fuel injection system
- Tier 4B EPA emissions compliant with Selective Catalytic Reduction (SCR) & Cooled Exhaust Gas Recirculation (CEGR)
- Factory Installed Loader available

PowerStar 90
86 Gross Engine hp
73 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 100
98 Gross Engine hp
85 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 110
107 Gross Engine hp
93 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 120
117 Gross Engine hp
100 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

ALL MODELS:

- Tier 4B Emissions Compliant:
(SCR + CEGR)
- Electronic Injection Bosch High-pressure Common Rail System
 - Electric Engine Shutoff
 - Hand and Foot Throttle Controls
 - Grid Heater Starting Aid
 - Dual Element Air Filter
 - Constant Engine RPM
 - Vertical Exhaust
 - 30.3 gal Fuel Tank with Guard
 - 2.8 gal AdBlue DEF Tank
 - Parking brake

TRANSMISSION:

- LH side steering column mounted Power Shuttle
- 12 Forward and 12 Reverse Speeds
- (4) Synchronized Gears
- (3) Non-synchronized Ranges
- Forward Reverse Synchronized Shuttle
- 25 ph (40 kph)
- Speed varies with tire selection

STEERING/BRAKES:

- Hydrostatic Power Steering
- Brakes-
 - Wet disk brakes
 - Hydraulically assisted

AXLES:

- FRONT - 4WD
- Limited Slip
- Heavy Duty Electrohydraulic FWD Engagement
- Adjustable Tread Width from 56.6 in. to 76.6 in.

REAR

- Heavy Duty Flange Type
- Adjustable Tread Width 55.5 in. to 76.2 in.
- 4 Wheel Weights (2 x 110lb per side)



**POWERSTAR 90-120 PS KLASSIC FAST PICK
US PRICE LIST**

Standard Equipment

HYDRAULIC SYSTEM:

Open Center System
Dual Gear Pumps
 Implement Pump: 16.9 gpm (63.9 L)
 Steering Pump: 9.7 gpm (37.0 L)
 Total Flow: 26.6 gpm (100.8 L)
(2) Open Center Remote Valves with detent

REAR DIFFERENTIAL LOCK:
Mechanically Engaged

PTO:
Fully Independent
Flip-up PTO Shaft Guard
540/1000 rpm Hydraulic
 -Electronic engagement
 -Wet clutch
1-3/8 in. 6 splines

3-POINT LIFT SYSTEM:
Right hand console mounted lever control
Mechanical Draft Control
Rear 3 Point Hitch Control
Lift-O-Matic Plus
5,620 Pounds Lift Capacity
Category II Ends
Telescopic Stabilizers
Flexible Lower Link Ends

ELECTRICAL:
(1) 800 cca Heavy-Duty Battery - Cab
120 amp Alternator
7-pin Outlet for trailer/implement lighting and signals
3-pin Power Outlet (30 amp)
Single Pin (8 amp) Accessory Power outlet
(2) - 12V power sockets

INSTRUMENTATION:

Analog Instrumentation with warning lights for air cleaner service, alternator, oil pressure, fuel sediment/water sensor, PTO engagement, head light high beam, low fuel and parking brake, digital speed readout
Gauges for fuel level, engine temperature, tachometer and hour meter

CAB LIGHTING:

Front: (2) Halogen Headlights and (2) cab mounted worklights
Rear: (2) cab mounted worklights
Turn Signals/Flashers/Rear Lights

OPERATOR PROTECTIVE STRUCTURE:

CAB MODELS
ROPS protected, flat deck platform with heat and air conditioning, tinted windshield, retractable sun screen, front and rear wiper and washer, two doors with locks, two external mirrors, openable side windows, hinged rear window, high visibility panel
Steering Wheel - adjustable tilt
Seat - Cloth covered with air suspension and 10 degrees of swivel, operator's presence sensor, retractable seat belt and arm rests
Instructor Seat
Suspended pedals
Radio, speakers, and antenna

MISCELLANEOUS:

Pivoting Engine Hood
SMV Emblem
Toolbox

WARRANTY:

New Holland Standard Warranty Applies

**POWERSTAR 90-120 PS KLASSIC FAST PICK
US PRICE LIST**

Standard Equipment

LOADER:

665TL/720LU NON SELF-LEVELING

Maximum Lift Height @ pivot pin: 134"

Dump Clearance: 101.4"

Digging Depth: 7"

Lift Capacity

Max Height @ 800mm: 2,632 LBS

59" high @ 800mm: 3,638 LBS

Breakout Force @ 800mm: 4,455 LBS

Reach @ Max Lift Height: 43"

Reach @ Ground Level: 91"

Bucket Rollback Angle: 44 degrees

Bucket Dump Angle: 60 degrees

Skid Steer or Euro style Loader

bucket attach



**POWERSTAR 90-120 PS KLASIK FAST PICK
US PRICE LIST**

Models

COMMERCIAL MODEL	VERSION	Weight	Factory Data	List Price
POWERSTAR 90	Cab	8,157 LB	9058550P70	\$75,065.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 100	Cab	10,031 LB	9060469P50	\$77,525.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 110	Cab	8,157 LB	9062552P88	\$80,196.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 120	Cab	8,158 LB	9065642P46	\$84,157.00
Includes the following Equipment				
4WD+EH Engage+Limited Slip (744581) \$277.00				
Heavy Duty Rear Axle (333411) \$665.00				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
540/1000 RPM PTO (743594) \$560.00				



**POWERSTAR 90-120 PS KLASSIC FAST PICK
US PRICE LIST**

Factory Supplied Options

Order Code	Description	Weight	Factory Data	List Price
------------	-------------	--------	--------------	------------

PACKAGE SELECTION

SD_T9980 PACKAGING

X99804X	KLASSIC PACKAGING Klassic Package and Pricing Includes: 12x12 Power shuttle transmission Deluxe cab with instructor seat and hi-vis panel 25mph (40 kph) speed Heavy Duty 4WD front axle Heavy Duty rear axle 2 Function mid mount valve and joystick 540/1000 RPM PTO Rear 3 point hitch ground control Lift-O-Matic Plus 4 x 110 lb Rear wheel weights Allows for choice of the following tires: 18.4-30 Rear with 12.4R24 Front R1 Bias ply OR 16.4R34 Rear with 13.6R24 Front R1W Radial		(900399P36)	(\$512.00)
---------	---	--	-------------	------------

TIRES

FRONT

SD_T4940 FRONT WHEELS AND TIRES

4WD Bias Front Tires					
	8235601	12.4-24 8PR		9000838P50	\$1,075.00
4WD Radial Front Tires					
	8236404	13.6R24 R1W		9001370P46	\$1,757.00

REAR

SD_T4950 REAR WHEELS AND TIRES

Bias Rear Tires					
	8363801	18.4-30 12PR R1 FLAN 4WD Front Tire - 12.4-24 (8235601) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9002035P02	\$2,609.00



**POWERSTAR 90-120 PS KLASSIC FAST PICK
US PRICE LIST**

Radial Rear Tires					
		8302804	16.9R34 R1W 4WD Front Tire - 13.6R24 (8236404) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)	9001953P90	\$2,505.00

LOADER

LOADER

SD_T8110 LOADER BRACKETS

Heavy Duty Loader					
		336740	HD Non Self Leveling Ldr +SSQA 665TL/720LU Non Self Leveling with Skid Steer Style Attachment	9005479P50	\$7,025.00
		336742	HD Non Self Leveling Ldr +Euro 665TL/720LU Non Self Leveling with Euro Style Attachment	9005479P50	\$7,025.00
		743593	Less Front Loader		No Charge

SD_T8140 BUCKET

		336750	84" Bucket	9000734P76	\$942.00
--	--	--------	------------	------------	----------

WEIGHTS

FRONT

SD_T2150 FRONT BALLAST

		333215	Front Carrier +6 88 lb Weights Total weight - 661 lbs (300 kg)	9000638P82	\$819.00
		335215	8 WEIGHTS 40 KG - CA Total weight - 837 lbs (380 kg)	9000808P08	\$1,036.00

OPERATOR'S MANUALS

SD_T9840 COUNTRY CONFIGURATION

		334256	Canada (FR) Config ROPS French operator manual		No Charge
		334257	USA Spanish Configuration Spanish operator manual		No Charge

**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

Standard Equipment

KEY SELLING POINTS:

- CommandArc™ ergonomically places most frequently used controls to operator's right
- High visibility panel option for better view of loader when at full height
- Ten repositionable vents for heating and air conditioning
- Full-size instructor seat option
- Hydraulic shuttle lever
- Creeper transmission option
- 3.4L, 4-cylinder, 16 valve F5G engines with common rail fuel injection system
- Tier 4B EPA emissions compliant with Selective Catalytic Reduction (SCR) & Cooled Exhaust Gas Recirculation (CEGR)
- Factory Installed Loader available

PowerStar 90
86 Gross Engine hp
73 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 100
98 Gross Engine hp
85 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 110
107 Gross Engine hp
93 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 120
117 Gross Engine hp
100 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

ALL MODELS:

- Tier 4B Emissions Compliant:
(SCR + CEGR)
- Electronic Injection Bosch High-pressure Common Rail System
 - Electric Engine Shutoff
 - Hand and Foot Throttle Controls
 - Grid Heater Starting Aid
 - Dual Element Air Filter
 - Constant Engine RPM
 - Vertical Exhaust
 - 30.3 gal Fuel Tank with Guard
 - 2.8 gal AdBlue DEF Tank
 - Parking brake

TRANSMISSION:

- LH side steering column mounted
- Power Shuttle
- 12 Forward and 12 Reverse Speeds
- (4) Synchronized Gears
- (3) Non-synchronized Ranges
- Forward Reverse Synchronized Shuttle
- 19 mph (30 kph)
- Speed varies with tire selection

HYDRAULIC SYSTEM:

- Open Center System
- Dual Gear Pumps
- Implement Pump: 16.9 gpm (63.9 L)
- Steering Pump: 9.7 gpm (37.0 L)
- Total Flow: 26.6 gpm (100.8 L)
- (2) Open Center Remote Valves with detent

3-POINT LIFT SYSTEM:

- Right hand console mounted lever control
- Mechanical Draft Control
- 5,620 Pounds Lift Capacity
- Category II Ends
- Telescopic Stabilizers
- Flexible Lower Link Ends



**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

Standard Equipment

KEY SELLING POINTS:

- CommandArc™ ergonomically places most frequently used controls to operator's right
- High visibility panel option for better view of loader when at full height
- Ten repositionable vents for heating and air conditioning
- Full-size instructor seat option
- Hydraulic shuttle lever
- 3.4L, 4-cylinder, 16 valve F5G engines with common rail fuel injection system
- Tier 4B EPA emissions compliant with Selective Catalytic Reduction (SCR) & Cooled Exhaust Gas Recirculation (CEGR)
- Factory Installed Loader available

PowerStar 90
 86 Gross Engine hp
 73 PTO hp @ 2300 rpm
 4 Cyl Turbocharged Engine
 207 cu in (3.4 L) Displacement

PowerStar 100
 98 Gross Engine hp
 85 PTO hp @ 2300 rpm
 4 Cyl Turbocharged Engine
 207 cu in (3.4 L) Displacement

PowerStar 110
 107 Gross Engine hp
 93 PTO hp @ 2300 rpm
 4 Cyl Turbocharged Engine
 207 cu in (3.4 L) Displacement

PowerStar 120
 117 Gross Engine hp
 100 PTO hp @ 2300 rpm
 4 Cyl Turbocharged Engine
 207 cu in (3.4 L) Displacement

ALL MODELS:

Tier 4B Emissions Compliant:

- (SCR + CEGR)
- Electronic Injection Bosch High-pressure Common Rail System
- Electric Engine Shutoff
- Hand and Foot Throttle Controls
- Grid Heater Starting Aid
- Dual Element Air Filter
- Constant Engine RPM
- Vertical Exhaust
- 30.3 gal Fuel Tank with Guard
- 2.8 gal AdBlue DEF Tank
- Parking brake

TRANSMISSION:

- LH side steering column mounted
- Power Shuttle
- 12 Forward and 12 Reverse Speeds
- (4) Synchronized Gears
- (3) Non-synchronized Ranges
- Forward Reverse Synchronized Shuttle
- 19 mph (30 kph)
- Speed varies with tire selection

HYDRAULIC SYSTEM:

- Open Center System
- Dual Gear Pumps
- Implement Pump: 16.9 gpm (63.9 L)
- Steering Pump: 9.7 gpm (37.0 L)
- Total Flow: 26.6 gpm (100.8 L)
- (2) Open Center Remote Valves with detent

3-POINT LIFT SYSTEM:

- Right hand console mounted lever control
- Mechanical Draft Control
- 5,620 Pounds Lift Capacity
- Category II Ends
- Telescopic Stabilizers
- Flexible Lower Link Ends

STEERING/BRAKES:



**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

Standard Equipment

MISCELLANEOUS:

- Pivoting Engine Hood
- SMV Emblem
- Toolbox

WARRANTY:

New Holland Standard Warranty Applies

LOADER:

655TL/710LU NON SELF-LEVELING

- Maximum Lift Height @ pivot pin: 126"
- Dump Clearance: 93.6"
- Digging Depth: 8.2"
- Lift Capacity
 - Max Height @ 800mm: 2,478 LBS
 - 59" high @ 800mm: 3,080 LBS
- Breakout Force @ 800mm: 3,739 LBS
- Reach @ Max Lift Height: 39.5"
- Reach @ Ground Level: 90.7"
- Bucket Rollback Angle: 45 degrees
- Bucket Dump Angle: 60 degrees
- Skid Steer or Euro Style Loader bucket attach

655TL/715LU SELF-LEVELING

- Maximum Lift Height @ pivot pin: 125"
- Dump Clearance: 93"
- Digging Depth: 8"
- Lift Capacity
 - Max Height @ 800mm: 3,179 LBS
 - 59" high @ 800mm: 4,665 LBS
- Breakout Force @ 800mm: 3,860 LBS
- Reach @ Max Lift Height: 39.4"
- Reach @ Ground Level: 90.5"
- Bucket Rollback Angle: 40 degrees
- Bucket Dump Angle: 60 degrees
- Skid Steer or Euro style Loader bucket attach

665TL/720LU NON SELF-LEVELING

- Maximum Lift Height @ pivot pin: 134"
- Dump Clearance: 101.4"
- Digging Depth: 7"
- Lift Capacity
 - Max Height @ 800mm: 2,632 LBS
 - 59" high @ 800mm: 3,638 LBS
- Breakout Force @ 800mm: 4,455 LBS
- Reach @ Max Lift Height: 43"
- Reach @ Ground Level: 91"
- Bucket Rollback Angle: 44 degrees
- Bucket Dump Angle: 60 degrees
- Skid Steer or Euro style Loader bucket attach

665TL/725LU SELF-LEVELING

- Maximum Lift Height @ pivot pin: 135"
- Dump Clearance: 102.2"
- Digging Depth: 6.4"
- Lift Capacity
 - Max Height @ 800mm: 3,428 LBS
 - 59" high @ 800mm: 5,549 LBS
- Breakout Force @ 800mm: 5,661 LBS
- Reach @ Max Lift Height: 43"
- Reach @ Ground Level: 93"
- Bucket Rollback Angle: 40 degrees
- Bucket Dump Angle: 60 degrees
- Skid Steer or Euro style Loader bucket attach



**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

Models

COMMERCIAL MODEL	VERSION	Weight	Factory Data	List Price
POWERSTAR 90	Cab	8,157 LB	9058550P70	\$75,065.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 100	Cab	10,031 LB	9060469P50	\$77,525.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 110	Cab	8,157 LB	9062552P88	\$80,196.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 120	Cab	8,158 LB	9065642P46	\$84,157.00
Includes the following Equipment				
4WD+EH Engage+Limited Slip (744581) \$277.00				
Heavy Duty Rear Axle (333411) \$665.00				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
540/1000 RPM PTO (743594) \$560.00				



**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

Factory Supplied Options

Order Code	Description	Weight	Factory Data	List Price
------------	-------------	--------	--------------	------------

PACKAGE SELECTION

SD_T9980 PACKAGING

	X99801X Custom Configuration			No Charge
--	------------------------------	--	--	-----------

OPERATOR PLATFORM

SD_T9200 OPERATOR STRUCTURE #1

Cab				
	744588 Deluxe Cab Includes instructor seat, rear wiper and washer, radio & internal mirror			No Charge
	334183 Deluxe Cab w/HiVis Panel Includes high visibility panel, instructor seat, rear wiper and washer, radio & internal mirror		9000434P46	\$557.00

POWER TRAIN

TRANSMISSION

SD_T2800 SPEED

	759059 40KPH - REAL ALL TYR 25 MPH (40 KPH) Transmission for 4WD		9000205P92	\$264.00
--	--	--	------------	----------

AXLES

SD_T4010 FRONT AXLE

	336858 2WD Standard Axle Heavy Duty Requires 20 MPH (30 KPH) Compatible with 655TL Requires rear wheel weights (330470) ONLY when ordered with 655TL NOT compatible with 665TL		(900861P90)	(\$1,105.00)
	744581 4WD+EH Engage+Limited Slip+HD Heavy-Duty Limited Slip Base equipment on PowerStar 120 Requires Heavy-Duty rear axle (333411)		9000216P06	\$277.00



**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

SD_T4810 REAR AXLE

	333411	Heavy Duty Rear Axle Heavy-Duty Rear Axle Base Equipment on PowerStar 120 Required for 34 & 38 inch rear tires NOT compatible with Standard-Duty 4WD front axles (743559 or 744580) NOT compatible with 30 inch or smaller rear tires on PowerStar 90, 100 or 110		9000518P70	\$665.00
--	--------	---	--	------------	----------

TIRES

FRONT

SD_T4940 FRONT WHEELS AND TIRES

2WD Front Tires					
	8126601	9.5L15 4 RIB 8 PLY		9000499P98	\$641.00
	8125801	7.50-16 8 PLY HD		9000381P42	\$489.00
	8125901	10.00-16 8 PLY HD		9000712P92	\$914.00
4WD Bias Front Tires					
	8235601	12.4-24 8PR		9000838P50	\$1,075.00
	8236501	13.6-24 8PR R1 FLANG		9001027P26	\$1,317.00
	8240604	14.9-24 8PR R1		9001265P16	\$1,622.00
4WD Radial Tires					
	8235404	12.4R24 R1W		9001120P08	\$1,436.00
4WD Radial Front Tires					
	8236404	13.6R24 R1W		9001370P46	\$1,757.00
	8239404	14.9R24 R1W		9001686P36	\$2,162.00
4WD Specialty Front Tires					
	8290904	12.5/80-18 10PR R4		9001339P26	\$1,717.00
	8247404	11.2R28 R1W		9001157P52	\$1,484.00
	8873402	360/80R20 TRI 2 HD Municipal tread		9001525P68	\$1,956.00

REAR

SD_T4950 REAR WHEELS AND TIRES

Bias Rear Tires					
	8363801	18.4-30 12PR R1 FLAN 4WD Front Tire - 12.4-24 (8235601) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9002035P02	\$2,609.00
	8364604	16.9-34 8PR R1 4WD Front Tire - 13.6-24 (8236501) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9001464P84	\$1,878.00



**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

	8365501	18.4-34 10PR 4WD Front Tire - 14.9-24 (8240604) 2WD Front Tire - 10.00-16 (8125901)		9002242P50	\$2,875.00
Radial Rear Tires					
	8357404	18.4R30 R1W 4WD Front Tire - 12.4R24 (8235404) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9002714P40	\$3,480.00
	8302804	16.9R34 R1W 4WD Front Tire - 13.6R24 (8236404) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9001953P90	\$2,505.00
	8365404	18.4R34 R1W 4WD Front Tire - 14.9R24 (8239404) 2WD Front Tire - 10.00-16 (8125901)		9002939P04	\$3,768.00
Specialty Rear Tires					
	8391904	19.5L-24 10 PR R4 4WD Front Tire - 12.5/80-18 (8290904)		9002073P24	\$2,658.00
	8372404	13.6R38 R1W 8372404 4WD Front Tire - 11.2R28 (8247404) 2WD Front Tire - 7.50-16 (8125801)		9001823P64	\$2,338.00
	8906401	440/80 R30 Municipal tread 4WD Front Tire - 360/80R20 (8873402)		9002842P32	\$3,644.00

HYDRAULICS

MID-MOUNT

SD_T8280 MID-MOUNT VALVES

	762166	MID+JOY+3FNCTN+NEW 2 function mid-mount valve and joystick		9001157P52	\$1,484.00
	762167	MID+JOY+3FNC+DIV+NEW 2 function mid-mount valve and joystick with 3rd function diverter Requires a Loader Bucket with Grapple NOT AVAILABLE as Factory Installed		9001737P06	\$2,227.00

LOADER

LOADER

SD_T8110 LOADER BRACKETS

Standard Duty Loader					
	336914	Non Self Leveling Ldr +SSQA 655TL/710LU Non Self Leveling with Skid Steer Attachment NOT compatible with 38" rear tires		9004728P36	\$6,062.00



**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

		336732	Non Self Leveling Ldr +Euro 655TL/710LU Non Self Leveling with Euro Style Attachment NOT compatible with 38" rear tires		9004728P36	\$6,062.00
		336734	Mech Self Leveling Ldr +SSQA 655TL/715LU Mechanical Self Leveling with Skid Steer Style Attachment NOT compatible with 38" rear tires		9005592P60	\$7,170.00
		336736	Mech Self Leveling Ldr +Euro 655TL/715LU Mechanical Self Leveling with Euro Style Attachment NOT compatible with 38" rear tires		9005592P60	\$7,170.00
Heavy Duty Loader						
		336740	HD Non Self Leveling Ldr +SSQA 665TL/720LU Non Self Leveling with Skid Steer Style Attachment		9005479P50	\$7,025.00
		336742	HD Non Self Leveling Ldr +Euro 665TL/720LU Non Self Leveling with Euro Style Attachment		9005479P50	\$7,025.00
		336744	HD Self Leveling Ldr +SSQA 665TL/725LU Mechanical Self Leveling with Skid Steer Style Attachment		9006347P64	\$8,138.00
		336746	HD Self Leveling Ldr +Euro 665TL/725LU Mechanical Self Leveling with Euro Style Attachment		9006347P64	\$8,138.00

SD_T8140 BUCKET

		336750	84" Bucket		9000734P76	\$942.00
--	--	--------	------------	--	------------	----------

PTO

REAR PTO

SD_T8010 PTO

		743594	540/1000 RPM PTO		9000436P80	\$560.00
--	--	--------	------------------	--	------------	----------

HITCH

REAR 3 POINT HITCH

SD_T8130 3 POINT HITCH CONTROL

		332035	Mech 3 Pt Hitch Ground Control		9000203P58	\$261.00
--	--	--------	--------------------------------	--	------------	----------

SD_T8200 HITCH

		743595	Lift-O-Matic Plus Lift-O-Matic Plus		9000206P70	\$265.00
--	--	--------	---	--	------------	----------

**POWERSTAR 90-120 PS A LA CARTE CAB
US PRICE LIST**

WEIGHTS

FRONT

SD_T2150 FRONT BALLAST

	333215	Front Carrier +6 88 lb Weights Total weight - 661 lbs (300 kg)		9000638P82	\$819.00
	335215	8 WEIGHTS 40 KG - CA Total weight - 837 lbs (380 kg)		9000808P08	\$1,036.00

REAR

SD_T4961 REAR BALLAST

	330470	4 x 110 lb Rear Wheel Weights Total weight - 440 lbs (200 kg) NOT compatible with 24" rear tires option Required with 2WD HD front axle		9000498P42	\$639.00
--	--------	---	--	------------	----------

OPERATOR'S MANUALS

SD_T9840 COUNTRY CONFIGURATION

	334256	Canada (FR) Config ROPS French operator manual			No Charge
	334257	USA Spanish Configuration Spanish operator manual			No Charge



**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

Standard Equipment

KEY SELLING POINTS:

- CommandArc™ ergonomically places most frequently used controls to operator's right
- Hydraulic shuttle lever
- 3.4L, 4-cylinder, 16 valve F5G engines with common rail fuel injection system
- Tier 4B EPA emissions compliant with Selective Catalytic Reduction (SCR) & Cooled Exhaust Gas Recirculation (CEGR)
- Factory Installed Loader available

PowerStar 90

86 Gross Engine hp
73 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 100

98 Gross Engine hp
85 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 110

107 Gross Engine hp
93 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

PowerStar 120

117 Gross Engine hp
100 PTO hp @ 2300 rpm
4 Cyl Turbocharged Engine
207 cu in (3.4 L) Displacement

ALL MODELS:

- Tier 4B Emissions Compliant:
(SCR + CEGR)
- Electronic Injection Bosch High-pressure Common Rail System
- Electric Engine Shutoff
- Hand and Foot Throttle Controls
- Grid Heater Starting Aid
- Dual Element Air Filter
- Constant Engine RPM
- Vertical Exhaust
- 30.3 gal Fuel Tank with Guard
- 2.8 gal AdBlue DEF Tank
- Parking brake

TRANSMISSION:

- LH side steering column mounted
- Power Shuttle
- 12 Forward and 12 Reverse Speeds
(4) Synchronized Gears
(3) Non-synchronized Ranges
- Forward Reverse Synchronized Shuttle
- 19 mph (30 kph)
- Speed varies with tire selection

HYDRAULIC SYSTEM:

- Open Center System
- Dual Gear Pumps
 - Implement Pump: 16.9 gpm (63.9 L)
 - Steering Pump: 9.7 gpm (37.0 L)
 - Total Flow: 26.6 gpm (100.8 L)
- (2) Open Center Remote Valves with detent

3-POINT LIFT SYSTEM:

- Right hand console mounted lever control
- Mechanical Draft Control
- 5,620 Pounds Lift Capacity
- Category II Ends
- Telescopic Stabilizers
- Flexible Lower Link Ends



**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

Standard Equipment

STEERING/BRAKES:

Hydrostatic Power Steering
Brakes-
 Wet disk brakes
 Hydraulically assisted

AXLES:

FRONT - 2WD (19 mph, 30 kph)
Inverted U-section type
Adjustable Tread Width from 57.0 in.
 to 79.7 in.

FRONT - 4WD
Limited Slip

- PowerStar 90, 100 & 110:
 Electrohydraulic FWD Engagement
 Adjustable Tread Width from
 56.6 in. to 76.6 in.
- PowerStar 120:
 Heavy Duty Electrohydraulic FWD
 Engagement
 Adjustable Tread Width from
 56.6 in. to 76.6 in.

REAR

- PowerStar 90, 100 & 110:
 Flange Type
 Adjustable Tread Width 55.5 in.
 to 76.2 in.
- PowerStar 120:
 Heavy Duty Flange Type
 Adjustable Tread Width 55.5 in.
 to 76.2 in.

REAR DIFFERENTIAL LOCK:
Mechanically Engaged

PTO:

Fully Independent
Flip-up PTO Shaft Guard
PowerStar 90, 100 & 110:
 540 rpm Hydraulic
PowerStar 120:
 540/1000 rpm Hydraulic
 -Electronic engagement
 -Wet clutch
1-3/8 in. 6 splines

ELECTRICAL:

(1) 800 cca Heavy-Duty Battery - ROPS
120 amp Alternator
7-pin Outlet for trailer/implement lighting
 and signals
3-pin Power Outlet (30 amp)
Single Pin (8 amp) Accessory Power
outlet
12V power socket

INSTRUMENTATION:

Analog Instrumentation with warning
lights for air cleaner service,
alternator, oil pressure, fuel
sediment/water sensor, PTO
engagement, head light high beam,
low fuel and parking brake,
digital speed readout
Gauges for fuel level, engine temp,
tachometer and hour meter

LIGHTING:

ROPS
Front: (2) Halogen Headlights
Rear: (1) ROPS mounted worklight
Turn Signals/Flashers/Rear Lights

OPERATOR PROTECTIVE STRUCTURE:

ROPS MODELS
2-Post Foldable ROPS with ISO-
mounted flat deck platform
Steering Wheel - adjustable tilt
Seat - Vinyl covered with mechanical
suspension, operator's presence
sensor, retractable seat belts and
arm rests
Suspended pedals
Locking brake pedals

MISCELLANEOUS:

Pivoting Engine Hood
SMV Emblem
Toolbox



**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

Standard Equipment

WARRANTY:

New Holland Standard Warranty Applies

LOADER:

LOADER:

655TL/710LU NON SELF-LEVELING

Maximum Lift Height @ pivot pin: 126"
Dump Clearance: 93.6"
Digging Depth: 8.2"
Lift Capacity
Max Height @ 800mm: 2,478 LBS
59" high @ 800mm: 3,080 LBS
Breakout Force @ 800mm: 3,739 LBS
Reach @ Max Lift Height: 39.5"
Reach @ Ground Level: 90.7"
Bucket Rollback Angle: 45 degrees
Bucket Dump Angle: 60 degrees
Skid Steer or Euro Style Loader
bucket attach

665TL/720LU NON SELF-LEVELING

Maximum Lift Height @ pivot pin: 134"
Dump Clearance: 101.4"
Digging Depth: 7"
Lift Capacity
Max Height @ 800mm: 2,632 LBS
59" high @ 800mm: 3,638 LBS
Breakout Force @ 800mm: 4,455 LBS
Reach @ Max Lift Height: 43"
Reach @ Ground Level: 91"
Bucket Rollback Angle: 44 degrees
Bucket Dump Angle: 60 degrees
Skid Steer or Euro style Loader
bucket attach

655TL/715LU SELF-LEVELING

Maximum Lift Height @ pivot pin: 125"
Dump Clearance: 93"
Digging Depth: 8"
Lift Capacity
Max Height @ 800mm: 3,179 LBS
59" high @ 800mm: 4,665 LBS
Breakout Force @ 800mm: 3,860 LBS
Reach @ Max Lift Height: 39.4"
Reach @ Ground Level: 90.5"
Bucket Rollback Angle: 40 degrees
Bucket Dump Angle: 60 degrees
Skid Steer or Euro style Loader
bucket attach

665TL/725LU SELF-LEVELING

Maximum Lift Height @ pivot pin: 135"
Dump Clearance: 102.2"
Digging Depth: 6.4"
Lift Capacity
Max Height @ 800mm: 3,428 LBS
59" high @ 800mm: 5,549 LBS
Breakout Force @ 800mm: 5,661 LBS
Reach @ Max Lift Height: 43"
Reach @ Ground Level: 93"
Bucket Rollback Angle: 40 degrees
Bucket Dump Angle: 60 degrees
Skid Steer or Euro style Loader
bucket attach



**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

Models

COMMERCIAL MODEL	VERSION	Weight	Factory Data	List Price
POWERSTAR 90	Rops	8,157 LB	9050045P58	\$64,161.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 100	Rops	8,157 LB	9051964P38	\$66,621.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 110	Rops	8,157 LB	9054047P76	\$69,292.00
Includes the following Equipment				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
POWERSTAR 120	Rops	8,157 LB	9057137P34	\$73,253.00
Includes the following Equipment				
4WD+EH Engage+Limited Slip (744581) \$277.00				
Heavy Duty Rear Axle (333411) \$665.00				
12.4-24 8PR (8235601) \$1,075.00				
18.4-30 12PR R1 FLAN (8363801) \$2,609.00				
540/1000 RPM PTO (743594) \$560.00				



**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

Factory Supplied Options

Order Code	Description	Weight	Factory Data	List Price
------------	-------------	--------	--------------	------------

PACKAGE SELECTION

SD_T9980 PACKAGING

X99801X	Custom Configuration			No Charge
---------	----------------------	--	--	-----------

OPERATOR PLATFORM

SD_T9200 OPERATOR STRUCTURE #1

ROPS				
392315	Platform w/Foldable ROPS Includes tilt column			No Charge
334190	Deluxe Platform w/FOPS Includes tilt column, FOPS canopy, noise reduction kit and 12V power outlet		9001295P58	\$1,661.00

POWER TRAIN

TRANSMISSION

SD_T2800 SPEED

759059	40KPH - REAL ALL TYR 25 MPH (40 KPH) Transmission for 4WD		9000205P92	\$264.00
--------	---	--	------------	----------

AXLES

SD_T4010 FRONT AXLE

336858	2WD Standard Axle Heavy Duty Requires 20 MPH (30 KPH) Compatible with 655TL Requires rear wheel weights (330470) ONLY when ordered with 655TL NOT compatible with 665TL		(900861P90)	(\$1,105.00)
744581	4WD+EH Engage+Limited Slip+HD Heavy-Duty Limited Slip Base equipment on PowerStar 120 Requires Heavy-Duty rear axle (333411)		9000216P06	\$277.00



**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

SD_T4810 REAR AXLE

	333411	Heavy Duty Rear Axle Heavy-Duty Rear Axle Base Equipment on PowerStar 120 Required for 34 & 38 inch rear tires NOT compatible with Standard-Duty 4WD front axles (743559 or 744580) NOT compatible with 30 inch or smaller rear tires on PowerStar 90, 100 or 110		9000518P70	\$665.00
--	--------	---	--	------------	----------

TIRES

FRONT

SD_T4940 FRONT WHEELS AND TIRES

2WD Front Tires					
	8126601	9.5L15 4 RIB 8 PLY		9000499P98	\$641.00
	8125801	7.50-16 8 PLY HD		9000381P42	\$489.00
	8125901	10.00-16 8 PLY HD		9000712P92	\$914.00
4WD Bias Front Tires					
	8235601	12.4-24 8PR		9000838P50	\$1,075.00
	8236501	13.6-24 8PR R1 FLANG		9001027P26	\$1,317.00
	8240604	14.9-24 8PR R1		9001265P16	\$1,622.00
4WD Radial Tires					
	8235404	12.4R24 R1W		9001120P08	\$1,436.00
4WD Radial Front Tires					
	8236404	13.6R24 R1W		9001370P46	\$1,757.00
	8239404	14.9R24 R1W		9001686P36	\$2,162.00
4WD Specialty Front Tires					
	8290904	12.5/80-18 10PR R4		9001339P26	\$1,717.00
	8247404	11.2R28 R1W		9001157P52	\$1,484.00
	8873402	360/80R20 TRI 2 HD Municipal tread		9001525P68	\$1,956.00

REAR

SD_T4950 REAR WHEELS AND TIRES

Bias Rear Tires					
	8363801	18.4-30 12PR R1 FLAN 4WD Front Tire - 12.4-24 (8235601) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9002035P02	\$2,609.00
	8364604	16.9-34 8PR R1 4WD Front Tire - 13.6-24 (8236501) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9001464P84	\$1,878.00



**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

	8365501	18.4-34 10PR 4WD Front Tire - 14.9-24 (8240604) 2WD Front Tire - 10.00-16 (8125901)		9002242P50	\$2,875.00
Radial Rear Tires					
	8357404	18.4R30 R1W 4WD Front Tire - 12.4R24 (8235404) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9002714P40	\$3,480.00
	8302804	16.9R34 R1W 4WD Front Tire - 13.6R24 (8236404) 2WD Front Tire - 7.50-16 (8125801) or 10.00-16 (8125901)		9001953P90	\$2,505.00
	8365404	18.4R34 R1W 4WD Front Tire - 14.9R24 (8239404) 2WD Front Tire - 10.00-16 (8125901)		9002939P04	\$3,768.00
Specialty Rear Tires					
	8391904	19.5L-24 10 PR R4 4WD Front Tire - 12.5/80-18 (8290904)		9002073P24	\$2,658.00
	8372404	13.6R38 R1W 8372404 4WD Front Tire - 11.2R28 (8247404) 2WD Front Tire - 7.50-16 (8125801)		9001823P64	\$2,338.00
	8906401	440/80 R30 Municipal tread 4WD Front Tire - 360/80R20 (8873402)		9002842P32	\$3,644.00

HYDRAULICS

MID-MOUNT

SD_T8280 MID-MOUNT VALVES

	762166	MID+JOY+3FNCTN+NEW 2 function mid-mount valve and joystick		9001157P52	\$1,484.00
	762167	MID+JOY+3FNC+DIV+NEW 2 function mid-mount valve and joystick with 3rd function diverter Requires a Loader Bucket with Grapple NOT AVAILABLE as Factory Installed		9001737P06	\$2,227.00

LOADER

LOADER

SD_T8110 LOADER BRACKETS

Standard Duty Loader					
	336914	Non Self Leveling Ldr +SSQA 655TL/710LU Non Self Leveling with Skid Steer Attachment NOT compatible with 38" rear tires		9004728P36	\$6,062.00



**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

	336732	Non Self Leveling Ldr +Euro 655TL/710LU Non Self Leveling with Euro Style Attachment NOT compatible with 38" rear tires		9004728P36	\$6,062.00
	336734	Mech Self Leveling Ldr +SSQA 655TL/715LU Mechanical Self Leveling with Skid Steer Style Attachment NOT compatible with 38" rear tires		9005592P60	\$7,170.00
	336736	Mech Self Leveling Ldr +Euro 655TL/715LU Mechanical Self Leveling with Euro Style Attachment NOT compatible with 38" rear tires		9005592P60	\$7,170.00
Heavy Duty Loader					
	336740	HD Non Self Leveling Ldr +SSQA 665TL/720LU Non Self Leveling with Skid Steer Style Attachment		9005479P50	\$7,025.00
	336742	HD Non Self Leveling Ldr +Euro 665TL/720LU Non Self Leveling with Euro Style Attachment		9005479P50	\$7,025.00
	336744	HD Self Leveling Ldr +SSQA 665TL/725LU Mechanical Self Leveling with Skid Steer Style Attachment		9006347P64	\$8,138.00
	336746	HD Self Leveling Ldr +Euro 665TL/725LU Mechanical Self Leveling with Euro Style Attachment		9006347P64	\$8,138.00

SD_T8140 BUCKET

	336750	84" Bucket		9000734P76	\$942.00
--	--------	------------	--	------------	----------

PTO

REAR PTO

SD_T8010 PTO

	743594	540/1000 RPM PTO		9000436P80	\$560.00
--	--------	------------------	--	------------	----------

HITCH

REAR 3 POINT HITCH

SD_T8130 3 POINT HITCH CONTROL

	332035	Mech 3 Pt Hitch Ground Control		9000203P58	\$261.00
--	--------	--------------------------------	--	------------	----------

SD_T8200 HITCH

	743595	Lift-O-Matic Plus Lift-O-Matic Plus		9000206P70	\$265.00
--	--------	---	--	------------	----------

**POWERSTAR 90-120 PS A LA CARTE ROPS
US PRICE LIST**

WEIGHTS

FRONT

SD_T2150 FRONT BALLAST

	333215	Front Carrier +6 88 lb Weights Total weight - 661 lbs (300 kg)		9000638P82	\$819.00
	335215	8 WEIGHTS 40 KG - CA Total weight - 837 lbs (380 kg)		9000808P08	\$1,036.00

REAR

SD_T4961 REAR BALLAST

	330470	4 x 110 lb Rear Wheel Weights Total weight - 440 lbs (200 kg) NOT compatible with 24" rear tires option Required with 2WD HD front axle		9000498P42	\$639.00
--	--------	---	--	------------	----------

OPERATOR'S MANUALS

SD_T9840 COUNTRY CONFIGURATION

	334256	Canada (FR) Config ROPS French operator manual			No Charge
	334257	USA Spanish Configuration Spanish operator manual			No Charge

PARTS DIVISION SUPPLIED ACCESSORIES FOR POWERSTAR 90, 100, 110, 120 SERIES TRACTORS

Part Number	Description	PowerStar 90, 100, 110, 120		Notes
		ROPS	CAB	
	HYDRAULICS			
719195720	Third rear remote valve with lever control	X	X	Tractor must have 2nd rear remote valve installed.
719405720	First rear remote valve flow control	X	X	Tractor must have 2nd rear remote valve installed. Not compatible with 3 rear remote valves.
719124720	Two mid mount valves with joystick control	X	X	Includes trim kit (NOT COMPATIBLE WITH TIER 4A)
TBD	Two mid mount valves with joystick control - NEW TRIM	X	X	Includes trim kit (NOT COMPATIBLE WITH TIER 4A or TIER 4B WITH OLD TRIM STYLE)
	WEIGHTS			
710225250	Front End weight bracket			
710226250	6 Front Weights 88 lbs each (528 lbs total)	X	X	Requires front end weight bracket #710225250
710249250	8 Front Weights 88 lbs each (704 lbs total)	X	X	Requires front end weight bracket #710225250
710471250	4 Rear Wheel Weights 110 lbs each (440 lbs total)	X	X	For 28" and 30" rear wheels
710465250	6 Rear Wheel Weights 70 lbs each (420 lbs total)	X	X	For 24" wheels
	ELECTRICAL			
710762251	Rotary Beacon Kit	X		Connects to 12V power socket
710762252	Rotary Beacon Kit		X	Connects to 12V power socket
719216250	Engine Block Heater Kit	X	X	
81864735	4 Pin Outlet (25 amp) Electrical Plug			
86508819	Single Pin Male (8 amp) Electrical Plug			
718122950	Back Up Alarm		X	
	PLATFORM			
718130050	Monitor Mounting Bracket		X	
718462250	White Canopy	X		FOPS Compliant
718463250	Blue Canopy	X		FOPS Compliant
	LOADER			
	DIA	X	X	See 600TL Series Loader Price and Data Pages
	3rd Function Diverter Valve	X	X	NOT AVAILABLE AS DIA
715824136	Grill Guard Insert	X	X	Order from 600TL Series Loader Price and Data Pages
	MISCELLANEOUS			
718057720	Dynamic Front Fenders	X	X	Requires 4WD - 14.9-24, 14.9R24, 11.2-28, 11.2R28, 13.6-24, 13.6R24, 12.4-24 or 12.4R24 (NOT COMPATIBLE WITH 655TL Loader)
719429250	Bolt-on Cutting Edge for 72" Bucket	X	X	
719430250	Bolt-on Cutting Edge for 84" Bucket	X	X	

PowerStar 90, 100, 110, 120 TIRE CHART

Tire Type	Application	Rear Tires		Matching 4WD Front Tires		Matching 2WD Front Tires	
		Tire	Order Code	Tire	Order Code	Tire	Order Code
Bias	Agricultural - R1	18.4-30	8363801	12.4-24	8235601	7.50-16	8125801
		16.9-34	8364604	13.6-24	8236501	10.00-16	8125901
		18.4-34	8365501	14.9-24	8240604	7.50-16	8125801
Radial	Agricultural - R1W	18.4R30	8357404	12.4R24	8235404	10.00-16	8125901
		16.9R34	8302804	13.6R24	8236404	7.50-16	8125801
		18.4R34	8365404	14.9R24	8239404	10.00-16	8125901
Specialty	Narrow	13.6R38	8372404	11.2R28	8247404	7.5-16	8125801
	Industrial - R4	19.5L24	8391904	12.5/80-18	8290904	N/A	