

**LEASING PROPOSAL REQUEST**

<b>Agency, Office Name</b>	Department of Correction
<b>Principal Use Office/Warehouse/Other</b>	Office
<b>Employee Headcount at Premises</b>	22
<b>Transaction Number</b>	21-01-912

	<b>Desired</b>	<b>Alternates Accepted</b>
<b>Service Area and Boundary Requirements</b>	<p>Location must be within Dickson County, TN with a preference for City of Dickson.</p> <p>The office will supervise probationers, parolees, and sex offenders providing case management and monitoring of offenders.</p> <p>As this office will supervise sex offenders, preference is given to locations a minimum of 1,000 feet from any property line providing services to minors; such as public schools, private or parochial schools, licensed day care centers, other child care facilities, public park, playgrounds, any recreation centers, public athletic fields, and libraries available for use by the general public. Preference is to be on city sewer and water.</p> <p>Building must include 24 hour access, appropriate HVAC, and other applicable building mechanics as appropriate for business operation 24 hours a day.</p>	<b>NO</b>
<b>Usable &amp; Rentable Contiguous Square Footage</b>	<p><b>Usable SF: 5,700 – 6,300*</b>  <b>Rentable SF: 6,300 – 7,000</b></p> <p><i>*Usable square footage does not include restrooms, mechanical rooms, janitorial closets, telecom closets or vestibules.</i></p> <p>The State intends "contiguous" to mean that the space is adjacent and on the same ground floor level. The actual square footage will be determined by programming and space planning.</p> <p>All proposals must meet the minimum rentable square footage requested, no deviation below the minimum square footage requested will be accepted.</p> <p><b>Proposals with square footages having up to a 10% deviation above the maximum square footage (up to 7,700) will be considered an alternate.</b> No deviations <b>below</b> the requested square footage amount will be accepted.</p>	YES

<b>Parking Requirements</b>	<p>Free, paved, well lit, striped parking for approximately <b>39</b> parking spaces in two separated parking lots (<b>19</b> for Staff and fleet vehicles and <b>20</b> for clients).</p> <p>Secured Staff and fleet parking <b>MUST</b> be fully enclosed with 8' chain link fence, with razor wire across the top, and motorized gated with direct access to the building, requires 24-hour access, and provides infrastructure for security which is accessible from a vehicle without having to exit the vehicle.</p> <p>Preference may be given to locations that can provide additional parking spaces; however proposals with fewer spaces will not be considered.</p> <p>The parking provided shall include handicap parking to meet the relevant code and zoning requirements in addition to the requested number of parking spaces.</p> <p>Fencing and security for staff parking lot is an agency expense and the cost is <b>not</b> to be included in the proposed lease rate; the cost estimate is to be provided separately. If elected, the cost reimbursed directly outside of lease rate.</p>	NO
<b>Signage requirements</b>	<p>Exterior signage must adhere to State branding requirements and easily identifiable from the road for the public. Please reference <a href="http://www.tnopr.gov">www.tnopr.gov</a> for signage specifications</p> <p><input type="checkbox"/> Please check box to indicate review of Signage specifications</p>	NO
<b>Special Buildout and Other Specifications</b>	<p>Preference will be given to single-story structures.</p> <p>As this office provides services to the public, the preferred location should be readily observable and accessible from a public road, which includes ease of access and identifiable exterior signage, and preferably on municipal water and sewer.</p> <p><b>Schedule 1:</b> DOC Special Buildout Specifications, GPS storage, and telecom room  <b>Schedule 2:</b> DOC Space Needs Analysis (SNA)  <b>Schedule 3:</b> Window elevations  <b>Schedule 4:</b> DOC Concept Plan  <b>Schedule 5:</b> DOC Lease Space Design Concepts  <b>Schedule 6:</b> Purchase Option  <b>Schedule 7:</b> Lease Exhibit D</p>	YES
<b>Term Length</b>	<p>Fifteen (15) Years, comprised of a Thirteen (13)-Year Base Term plus two One (1)-Year Renewal Options.</p>	NO
<b>Commencement Date</b>	<p>Commencement estimated to be within 24 months of lease execution, pursuant to Pro Forma Lease, Sections 19 and 20.</p>	YES

<b>Termination Options</b>	Termination for Convenience: 90 day per Block 6 of the Lease Termination for Cause: see Lease – Exhibit A, Paragraph 5.	YES
<b>Terms and Conditions</b>	As set forth in Pro Forma Lease. A copy of the Pro Forma Lease form can be found by visiting: <a href="http://www.tnlpr.gov">www.tnlpr.gov</a> <b>Comments to the Lease Template are required with initial bid submission with the Lease Proposal Quotation Form and cannot be added to a proposal if not included in initial bid proposal.</b>	NO
<b>Utility, Services and Other Costs</b>	Proposals can be quoted as either FULL SERVICE with no pass throughs or MODIFIED GROSS basis with Tenant responsible for payment of utilities and janitorial only.	YES

Communications:

Interested parties must direct all communications regarding this procurement to Cristina Johnstone, Leasing Coordinator, who is the State’s official point of contact. Email is the preferred form of communication.

Name: Ellen Mims  
 Phone Number: (615) 961-0067  
 Email: [rfp.coordinator@tn.gov](mailto:rfp.coordinator@tn.gov)

Submittal Deadline and Format:

The completed “Lease Proposal Form” must be submitted as follows **no later than 2:00 pm (Central time) on Tuesday April 30, 2024.**

Submittals must be received via either:

Email: [RFP.Coordinator@tn.gov](mailto:RFP.Coordinator@tn.gov)  
*(It is recommended that any email submission be sent “returned receipt requested” and confirm email is received)*

Or

Printed copy to:  
 Department of General Services/STREAM  
 Attn: Stephen J. Lusk, Esq., Executive Director of Compliance  
 William R. Snodgrass Tennessee Tower 24<sup>th</sup> Floor  
 312 Rosa L. Parks Avenue, Nashville, TN 37243

Method of Evaluation:

Please refer to the State of Tennessee Real Estate Asset Management Division website for the complete document, which describes the proposal evaluation method, by using the following link:

[https://www.tn.gov/content/dam/tn/generalservices/documents/stream/leasing/Section\\_IV-STREAM\\_LeaseProposalPackage-Evaluation\\_Method.pdf](https://www.tn.gov/content/dam/tn/generalservices/documents/stream/leasing/Section_IV-STREAM_LeaseProposalPackage-Evaluation_Method.pdf)

Disclaimer of Subjectivity:

Proposers should understand and accept that by responding to this solicitation they are willingly participating in a process that may consist of some degree of subjectivity. Proposers should be aware that the proposal determined to best meet the needs of the State may not necessarily be the lowest cost proposal.

### SCHEDULE 1: DOC Special Buildout Specifications

The space must be for professional office use and capable of meeting all the requirements of the agency, including geographic location, square footage, parking and any special requirements identified below and in the following schedules:

Facility should have separate public and staff restrooms; they will NOT share the same plumbing wall. Building should have separate staff and client entrance/exits.

Reception workstation is to have an electronic buzzer to release secure door nearest the station.

There will be a J-pay machine installed in the lobby area which requires a roll up door on the front and direct access from the Staff Only space of the lease space with double doors accessible from the rear in order to repair and load the machines. There must be an electrical outlet and data outlet for the machine. See specs below for fee pay kiosk requirement:

Provide 1 duplex outlet at side wall of fee pay machine

Provide 1 duplex outlet at side wall of fee pay machine

Note: Fee Kiosk 3D image and enlarged plan for reference only. Equipment will vary.

**FLOORING TYPE:** Hard Surface

**DOORS:**

	TYPE	HARDWARE
1	Roll-Up Corrugated Metal	PADLOCK

**ELECTRIC:** Lessor to power outlets for each fee pay kiosk

**DETAIL G FEE KIOSK SPACE REQUIREMENT**

Can not be within a room with windows. Requires a roll up door to the waiting room which can be rolled down and locked after hours.

Interior double doors to the machine is the preferred option only from zone 3. Vendor will access machine to fill and service from this side. Power/Data are required for the fee pay machine.


**STATE OF TENNESSEE  
SPACE STANDARDS  
DEPARTMENT OF  
GENERAL SERVICES**

**TYPICAL:  
DEPARTMENT  
OF  
CORRECTION**

**Fee Pay Kiosk**  
The main entrance must be at an angle to prevent direct a direct view in. A Fee Kiosk machine needs to be located off of the waiting room, it also needs to be lockable behind a roll-up door. Small interview rooms, restrooms, client lockers and JPAY all need to be in the waiting room.

**1.5**

## Drug Testing Prep Room

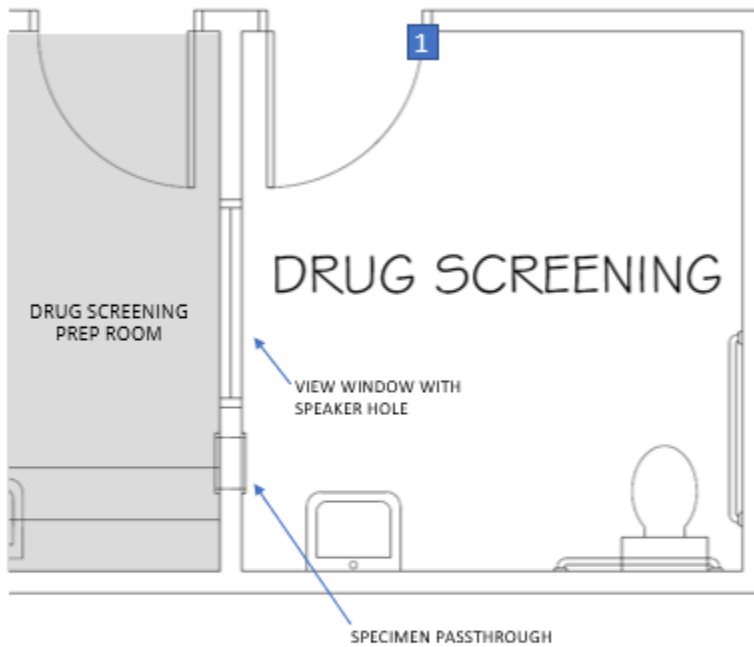

**ROOM OVERALL:**

The testing room and prep room need to share a wall with a one-way mirror. Drug testing room needs a pedestal sink, and the prep room needs top and bottom cabinetry. The counter space should not be in drug testing room's direct view. The prep room Maneuvering radius of 2 ½ feet. See Detail C (Pg.1.4) restroom.

**COUNTERTOP:**

for sample testing. Casework with lockable undercabinet storage. Wall mounted sink in the restroom.

**FLOORING TYPE:** VCT/LVT

**DOORS:**

	TYPE	HARDWARE
1	Solid, no glass	PRIVACY LOCKSET. Unlock with tool or key

**WINDOW :** No exterior windows. View window See Detail (Pg.12)


**ELECTRIC:** Per code requirements.


**PLUMBING:** Separate from public restroom and employee restroom plumbing for security measures.


**AREA:** At least 100 sqft.

**LIGHTING:** Must have emergency Lighting

**NOTE:** LL to install high-ceiling convex mirror above the toilet

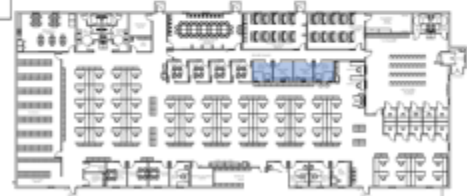

<p>STATE OF TENNESSEE SPACE STANDARDS DEPARTMENT OF GENERAL SERVICES</p>	<p>TYPICAL: DEPARTMENT OF CORRECTION</p>	<p><b>DRUG SCREENING PREP ROOM</b> This area needs to be close to the waiting room and accessible from zone 2.</p>	 1.9
--------------------------------------------------------------------------------------	------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------

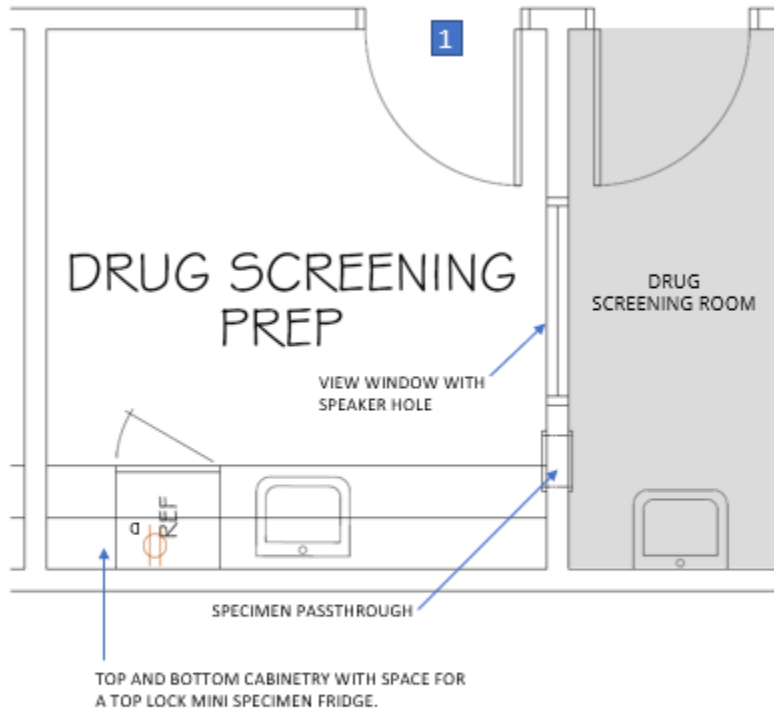

**ROOM OVERALL:**

The testing room and prep room need to share a wall with a one-way mirror. Drug testing room needs a pedestal sink, and the prep room needs top and bottom cabinetry. The counter space should not be in drug testing room's direct view. The prep room Maneuvering radius of 2 ½ feet. See Detail C (Pg.1.4) restroom.

**COUNTERTOP:**

for sample testing. Casework with lockable undercabinet storage. Wall mounted sink in the restroom.

**FLOORING TYPE:** VCT/LVT

**DOORS:**

	TYPE	HARDWARE
1	Solid, no glass	PRIVACY LOCKSET. Unlock with tool or key

**WINDOW :** No exterior windows. View window See Detail (Pg.12)

**ELECTRIC:** Per code requirements.

**PLUMBING:** Separate from public restroom and employee restroom plumbing for security measures.

**AREA:** At least 100 sqft.

**LIGHTING:** Must have emergency Lighting

**NOTE:** LL to install high-ceiling convex mirror above the toilet



STATE OF TENNESSEE  
SPACE STANDARDS  
DEPARTMENT OF  
GENERAL SERVICES

TYPICAL:  
DEPARTMENT  
OF  
CORRECTION

**DRUG SCREENING PREP ROOM**

This area needs to be close to the waiting room and accessible from zone 2.



1.9

The drug testing room will have a hard surface counter top and under counter, lockable casework with sink in the anteroom outside of actual restroom

### GPS Storage

**ROOM OVERALL:**  
**FLOORING TYPE: DOORS:**

	TYPE	HARDWARE
1	Solid door with side lite	OFFICE LOCKSET Separate change key

**WINDOW:** Needs exterior window for cellular connectivity  
**ELECTRIC:** Electrical on 3 walls and a minimum of 2 data.  
**AREA:** 120 sqft.

STATE OF TENNESSEE  
 SPACE STANDARDS  
 DEPARTMENT OF  
 GENERAL SERVICES

TYPICAL:  
 DEPARTMENT  
 OF  
 CORRECTION

**GPS STORAGE**  
 This area can be located in zone 2 or 3.

1.15







## Telecom Room


Shall provide a minimum of 2" conduits (x3) to extend to the property line. The State Service Provider needs to be consulted as they have the legal right to determine where the conduits terminate. Coordinate with state service provider and STS Cabling team.

Lighting should be a minimum of 50-foot candles on both sides of the racks.

Stand alone dedicated HVAC Unit appropriately sized according to square footage and heat load. Consult with STS Cabling Department for any questions on size and location. HVAC unit to be mounted on the wall at 8'-6" AFF. Thermostat easily accessible within the room, typically by the door. Unit needs to be operating 24 hours a day, 365 days/ year with no heat.

NOTE: Air from the HVAC unit must not blow directly at the equipment.

-  Card reader
-  Thermostat
-  Quad outlet
-  Dual outlet

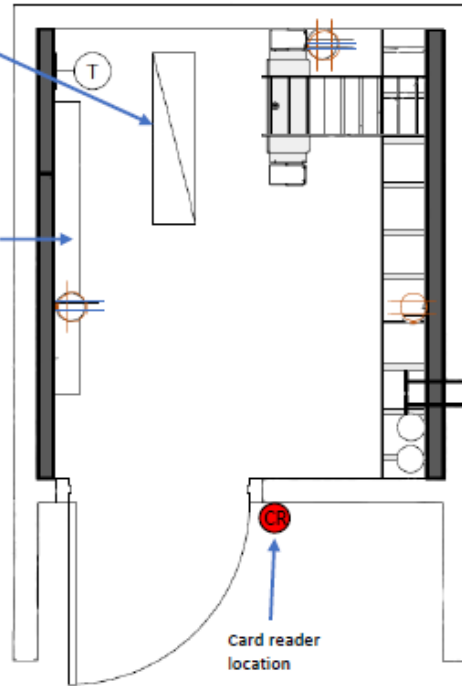

### ROOM OVERALL:

- Telecom should be centrally located in secure staff zone
- Must be temperature controlled, cooling only (see note on HVAC)
- Room should be within 200 feet of systems furniture or IT termination point(s)

### Single story buildings

- Ceiling should be open to deck except where approved by STS and DGS
- Spaces should be designed with adequate pathways or openings through walls and other obstructions into accessible ceiling space.

### Multi-story buildings

- At least one telecom room per floor
- Must be stacked with the walls extending to the deck
- State will provide necessary plywood backboard
- Provide conduit infrastructure for voice/data and back-boxes
- 1" conduit stubbed up into accessible area in the open access ceiling
- Place outlets according to build out plans, Include pull string and a bushing.

### FLOORING TYPE: FINISHED CONCRETE

DOORS: Must be minimum of 36" wide and open out. Must remain locked at all times.

	TYPE	HARDWARE
1	Solid door with card reader	No interior thumb lock Door closer needed

### WINDOW: No windows

### ELECTRICAL:

- Provide (2) dedicated 120v, 20-amp quad outlets. Coordinate location of quads with rack location(s).
- Provide (2) convenience outlets, one on each wall
- Provide 1 #6AWG ground wire from the main electrical panel with 3' of slack coiled up a top of back board.

### AREA:

Space requirements are 8'-0" x 10'-0" sqft. Minimum.

**STATE OF TENNESSEE  
SPACE STANDARDS  
DEPARTMENT OF  
GENERAL SERVICES**

**TYPICAL:**  
APPLY TO ALL  
RENOVATED AND  
BUILT-TO-SUIT  
BUILDINGS

### TELECOM ROOMS

State approved business class or commercial fiber optic connectivity must be available on the property. If deviating from any of these requirements, please consult with the STS State Cabling Department.  
Only the State of Tennessee has access to the telecom room.

**TN**  
**UPDATED**  
06/2023

## Schedule 2: DOC Space Needs Analysis (SNA)

**Space Needs Analysis Report**

**SNA Number: 32901-22-01**

**Agency: Correction**

**County: DICKSON City: Charlotte**

**Employees: 22**

**SNA Date: 10-27-2023**

**Prepared By: RNK**  
**Checked By:**

**Area Needed: 3,779**  
**Major Circulation: 50% 1,890**  
**Total Net Usable Needed: 5,669**

SNA Note: Agency requested report for Middle District 80 (Community Supervision Field Office). Current office is located at 513 Spring Street. AWS report. Refer to agency Office Space Needs Worksheet dated 08/21/23 for additional information.

Space Type	Standard Description	Wall	Area	Count	Memo
P	00000 Administration	None	0	1	Mobile. Space included in Free Address area. Positions will use Free Address area when in office.
P	00000 Non CS Staff	None	0	2	Mobile. Space included in Free Address area. Positions will use Free Address area when in office.
P	71844 Probation Parole Manager	None	0	2	Mobile. Space included in Free Address area. Positions will use Free Address area when in office.
P	78142 Probation Parole Officer	None	0	17	Mobile. Space included in Free Address area. Positions will use Free Address area when in office.
S	WR Waiting Room	H	380	1	Zone 1. Space for 15 chairs (300 sq.ft.) One - Secure Fee Kiosk (40sf) and Two - Client Locker units (28 sq.ft.). Secure Fee kiosk will need to be located in a secure closet. With One transaction countertop and pass-thru window to Reception Area. Waiting room will need direct access to client restrooms. Client and staff restrooms must be separate and will not share the same plumbing wall. Locking Glass front bulletin boards. *Hardwall area may need to be larger to accommodate sufficient circulation due to proportion of the room, vestibule, etc.

SNA Number: 32901-22-01

Space Type	Standard	Description	Wall	Area	Count	Memo
S	CIR	Client Interview Room w/Windows	H	72	2	Zone 1. Used for conducting interviews with clients without the need for client to leave the waiting room area. Each room will require 2 outward swinging doors. 1 - accessible from waiting room (for client use) and 1 - accessible from Zone 3 staff area. Each room will be separated by a wall with pass thru glass window with speaker hole between client and staff; Each side to have a 2' deep work surface.
S	DSWR	Drug Screening Prep. Rm	H	100	1	Zone 2. Viewing window with 2-way mirror with a speaker hole for communication to the Drug Screening Room. Document deal tray, specimen pass-thru stainless-steel cabinet. Base/wall hung cabinets with solid surface countertop and stainless-steel sink. Accommodations for an Undercounter refrigerator.
S	DSR	Drug Screening Room	H	100	1	Zone 2. With watercloset and solid surface countertop with sink. Viewing window with speaker hole. Specimen pass-through stainless steel cabinet. Document deal tray. Convex mirror.
S	GIR	Group Intake Room	H	325	1	Zone 2. Near or Adjacent to Waiting Room. Flip-top training tables and side chairs.
S	FR	Fingerprint Room	H	100	1	Zone 2. Room to be accessible from (or adjacent to) Group Intake Room. Standing and ADA height base cabinets and countertops. Fingerprint machine to sit on ADA height countertop for wheelchair accessibility.
S	IR	Interview Room	H	120	1	Zone 2. Accessible from Zone 2 and (secured) door to Zone 3.
S	PCR	Program/Conference Room	H	355	1	Zone 2. Three entry points: Zone 2, secured access to Zone 3, and an exterior door.
S	SRA	Shared Reception Area	0	49	1	Zone 3. Full view of waiting room through the transaction window. Door release button at the desk to operate the door into the Zone 2 corridor from the waiting room.
S	FAO	Free Address Office	H	120	1	Zone 3. Free Address Office to be used for NCIC/TIES function when needed.
S	EMR	Enclave/Mothers Room	H	120	1	Zone 3. Sidelight to have striped privacy film and blackout shade with side/bottom channels for full privacy when utilized as a Mother's Room.

Printed On 10/27/2023

Page 2 of 3

SNA Number: 32901-22-01

Space Type	Standard Description	Wall	Area	Count	Memo
S	FAA Free Address Area	0	49	10	Zone 3 Staff Area workstations. 9 stations for PPOs. 1 station for PPM.
S	FAA Assigned Workstation	0	49	2	Zone 3 Staff Area workstations. 1 station for BHS. 1 station for CC.
S	HC Hoteling Cubical	0	49	4	Zone 3. For visiting staff, volunteers and temp. employees.
S	LFA Lateral File Area	0	176	1	Zone 3. Lateral files to be located within the Free Address Area. 2 3dwr lateral files per one shared workstation; Each PPO is assigned 1 lateral file per assigned or shared workstation for active files.
S	ELA Employee Locker Area	0	44	1	Zone 3 near staff entrance for Tennsco Lockers.
S	MA Mail Area	0	48	1	Zone 3. Located adjacent to the Multi-Function printer. Mail area should not be visible to offenders.
S	MFP Multi-Function Printer	0	50	1	Zone 3. Located adjacent to the Mail Area.
S	PSB Paper Shredder Bin	0	6	1	Zone 3 near printer/mail area.
S	RB Recycle Bin	0	6	1	Zone 3 near printer/mail area.
S	BR Break Room	H	120	1	Zone 3. Base and wall cabinets with countertop and stainless steel sink. Space for one vending machine and seating for four. Locking Glass front bulletin boards.
S	FR File Room	H	308	1	Zone 3. 18"d x 36"w shelving units.
S	GSR General Storage Room	H	50	1	Zone 3 near staff entrance. 18"d x 36"w shelving units.
S	GSR GPS Storage Room	H	50	1	Zone 3. Must have small clerestory exterior window for cellular connectivity, metal shelving, and small mobile table with chair. Additional wall power at various heights required to charge agency equipment.
S	JC Janitorial Closet	H	30	1	Zone 3. 18"d x 36"w shelving unit for cleaning supplies.
S	SR Supply Room	H	64	1	Zone 3. 15"d x 36"w shelving units.
S	TC Surveillance Closet	H	50	1	Zone 3. For TDOC's surveillance system. Cannot be combined with the Telecom Room.
S	TC Telecom. Closet	H	80	1	Zone 3. For telephone and computer equipment. Room must be temperature controlled. Secured by card reader.


Suggested Range:	Min.	Max.
Usable:	5,700	6,300
Rentable:	6,300	7,000

Printed On 10/27/2023

Page 3 of 3

### Schedule 3: Window Elevations

#### A. Drug Testing Transaction Window with Door

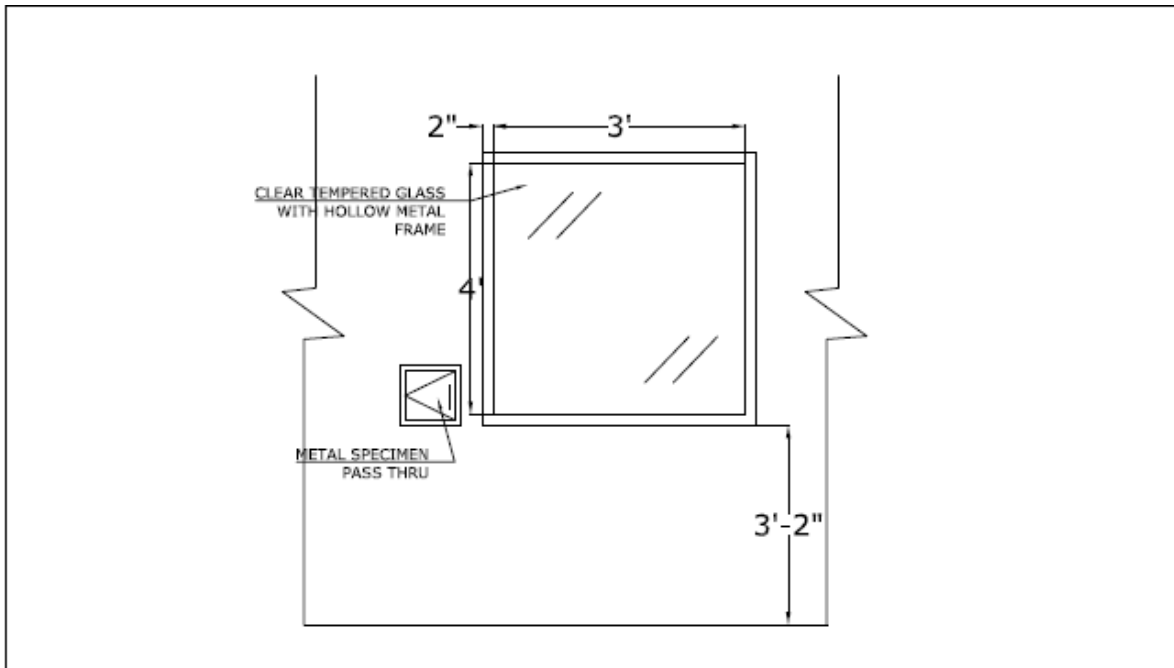


**1** **DRUG TESTING/PREP WINDOW TYP.**  
**A2.4** SCALE: 1/4"=1'0"

\*NOT for construction. Final size determination will be dependent upon site and code requirement.

**B. Lobby/Reception Transaction Windows**


A reception window measuring a minimum of 45" x 45" (final measurements depending on site selected as referenced in window elevations below) will be installed between the waiting area and reception area.

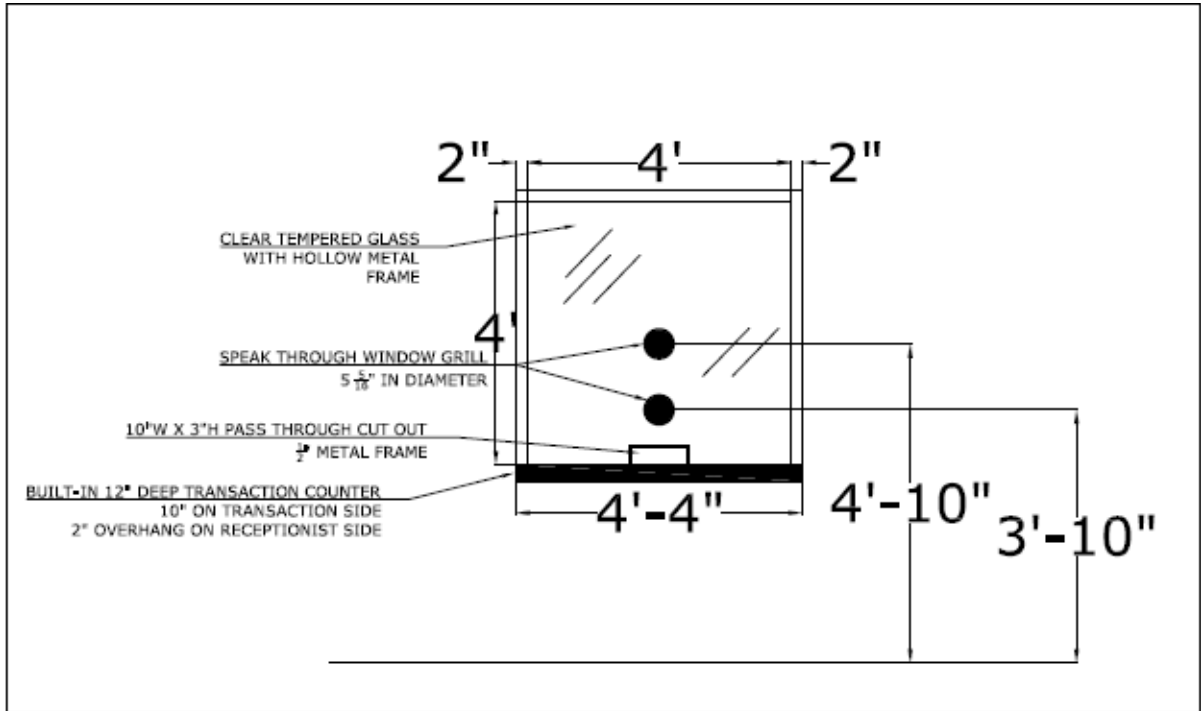

**1** RECEPTION WINDOW TYP.  
**A2.3** SCALE: 1/4"=1'0"

\*NOT for construction. Final size determination will be dependent upon site and code requirement.

C. Client Interview Room Window and Pass-Thru

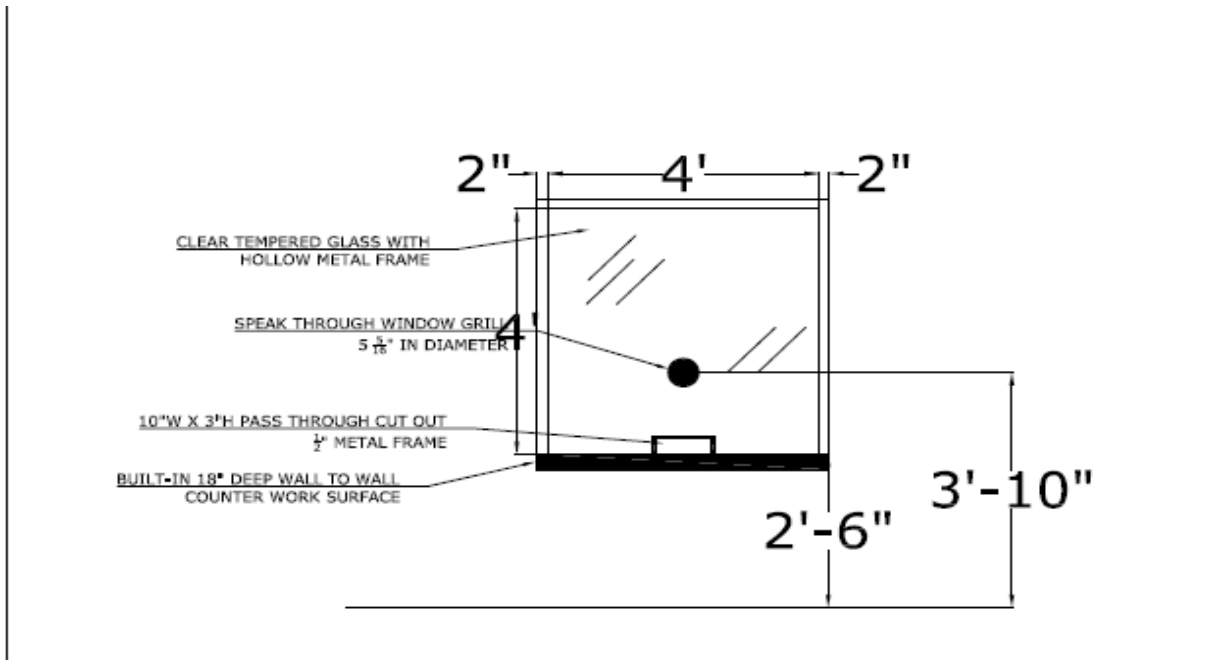

**1** CLIENT INTERVIEW WINDOW TYP.  
**A2.1** SCALE: 1/4"=1'0"

\*NOT for construction. Final size determination will be dependent upon site and code requirement.

### Schedule 4: DOC Concept Plan

This is a concept plan to illustrate the function of how the Department of Correction (DOC) operates in a typical office environment. It should NOT be used to price construction but only to provide a "concept" of how the agency conducts business in the space. Each office requirement differs for each county across Tennessee and the State reserves the right to layout the space to best fit the needs of DOC in Dickson County, TN. Per Paragraph #19 (Landlord buildout) of the Lease Agreement, the State must approve the final design and construction plans.

(Not To Be Used For Construction)





Schedule 5: TDOC Lease Space Design Concepts

Department of Correction: Community Supervision	
LEASE	DESIGN
<p><b>exterior</b></p> <ul style="list-style-type: none"> <li>Separate staff entrance and parking is required</li> <li>After-hours secondary entrance into conference room</li> <li>Covered building entrances</li> <li>Front doors and waiting room doors to be glass</li> <li>Masonry/brick veneer on exterior; minimal storefront construction</li> <li>Windows to be at least 5' above finish floor; tinting is allowed in existing locations</li> <li>Located at least 1000 feet away from school, daycare, public playground, recreational facility, etc.</li> <li>Minimal trees and bushes</li> <li>Well-lit parking and pedestrian paths</li> <li>Located on bus line</li> <li>If fleet vehicle parking with 8' chain link fence and secured access</li> </ul> <p><b>interior</b></p> <ul style="list-style-type: none"> <li>Staff-only restrooms</li> <li>Drug Testing Suite: mirror above toilet to be installed by lessor</li> <li>Public male/female restrooms next to Conference room</li> <li>Walls around Public Zone to extend to deck</li> </ul>	<p><b>exterior</b></p> <ul style="list-style-type: none"> <li>Confirm if separate staff entrance and parking is required per project location</li> <li>After-hours secondary entrance into conference room</li> <li>Covered building entrances</li> <li>Front doors and waiting room doors to be glass</li> <li>Keyed drop box for fee payment</li> </ul> <p><b>interior</b></p> <ul style="list-style-type: none"> <li>File storage adjacent to work stations</li> <li>Staff-only restrooms</li> <li>Drug Testing Suite: solid surface countertops; mirror above toilet to be installed by lessor; storage for testing supplies; space for u/c refrigerator; door to swing out if possible</li> <li>Photo station in Group Intake Room</li> <li>Hook-ups for ceiling mounted projection in Conference, Training, and Program Room</li> <li>Public male/female restrooms next to Conference room</li> <li>Coordinate size and type of chairs in all Intermediate Zone spaces</li> <li>Program room next to Conference/Intake spaces</li> <li>Walls around Public Zone to extend to deck</li> </ul>

**A. Security Zone Concepts**

Leased space should be designed to establish a minimum of three levels of security to protect staff and secure records within the lease areas.

1. The first interior zone, Zone 1, should surround the Waiting Room and the visitor restrooms. Walls surrounding this zone should extend to the roof or ceiling deck.
2. The second zone, Zone 2, should surround areas where staff generally interact with visitors/offenders; the Interview rooms, Drug Testing, Group Intake, Finger Print areas, and other areas as designated.
3. Zone 3 will make up the remaining leased space, mostly general staff work areas.
4. Doors between Zones 2 and 3 will require ID swipe card readers or punch code locks for access. (agency expense)

**B. Parking:**

1. Officer/staff parking lot: preference is for this separate lot to be located adjacent to a side or rear staff entrance. One building exit should be directly adjacent to a staff parking lot to facilitate removal of an offender in a non-public setting.
2. The agency prefers for visitor/offender parking layout to include two access/enter points, if possible.
3. Secure "fleet car" paved parking, if required (to be determined after Agency has seen location), should not be located more than 300-feet from a staff entrance and requires an 8-foot high security fence and separate swipe activated or key-coded electric vehicle & pedestrian gates. Fencing in metropolitan areas should include BTO coil at the top instead of typical bard wire topping.

**C. General Building Design Issues:**

1. Exterior walls should be masonry or brick veneer construction and should not include typical "storefront" window-wall assemblies.
  2. Provide exterior site lighting at all building entry/exit doors and area lighting for all parking & pedestrian areas.
  3. The building entrance door(s) and customer waiting area should be fully visible to the receptionist.
  4. Front door(s) to the Waiting Room should be full glass doors. Front door entry shall include a vestibule design with doors not providing a direct view into the building.
  5. Interior door(s) of Waiting Room vestibule should also be full glass.
- No corridor to the back of the building should be directly in line with the front door.
  - Design space (windows, sidelights, etc.) so that staff can monitor ingress/egress for either the front or back of the building.
  - Smoking is not permitted in leased facilities. However, the Lessor must provide a designated smoking area no closer than 50 feet to any lease entrance.

**D. Building Exterior Signage:**

- Road/frontage signage shall be provided if space is not visual from main frontage road.

**E. Exterior Windows:**

- Exterior office windows should generally be 5-feet above the floor to prevent straight look into the interior staff spaces. TDOC may accept window tinting in existing lease spaces. Provide window treatment/blinds for all exterior windows, preferably metal blinds, furnished at Landlords expense.

**F. State ID Swipe Card or Punch Code Entry System:**

- NOTE- Hardware including electric strikes and magnetic locks if required to be provided by Landlord.
- The following rooms should be accessed by a 'card swipe' system using State ID's or punch code locks installed at Agency expense: all side/rear employee entry doors, Conference Rooms, File Rooms, Telecommunications Room and other rooms as requested. Interior entry/exit access doors between 'Security Zones' will require swipe or punch code access at Agency expense.

**G. Waiting Room/Lobby Sizing (Secure Zone 1):**

- Design waiting areas so that receptionist can easily watch the waiting area, Client Window(s), and entrance doors at all times. See example.
- Provide electrical release for door from waiting area to staff area, controlled by receptionist. Provide motion detector/request for release button on the staff side of door.
- The visitor restrooms should be located in the Waiting Room. Provide both male and female visitor restrooms.
- Staff restrooms should not be located in the same area as client restrooms, and preferably not on the same plumbing wall.

- Provide drinking fountain in waiting area and separate drinking fountain for staff located in staff work area.
- Provide wall blocking and power and data outlet for TDOC-provided TV.

**H. Conference Rooms:**

- Conference rooms need to have power/data outlets in ceiling (for ceiling-mounted projection equipment).
- One wall (longest dimension) should be a full floor-to-ceiling whiteboard (paint type system).
- Conference Rooms shall have outside access doors (confirm layout with tenant).

**I. Drug Testing Rooms (Secure Zone 2):**

- Non-porous counter tops.
- Door should swing out of the room, if possible.
- Floor finish should be vinyl tile.
- High-ceiling mirror above toilet installed by lessor and a cased opening pass-thru to monitoring room
- Include space for under-counter refrigerator (provided by TDOC).

**J. Staff Break Room:**

- Provide wall blocking and power and data outlet for TDOC-provided TV. Coordinate with tenant for location.

**K. File Rooms:**

- Electrical outlets in file areas with standard 5-drawer filing cabinets shall be set at 60-inches AFF.

**L. Security Cameras:**

- Provide data lines with double junction box mounting and conduit to the Telecommunications Room for the following camera locations; adjacent to all exterior entry doors, the Waiting Room and other locations, based on the lease space required, within the staff areas based on the final space layout.

**M. Building Maintenance:**

- Janitorial services shall not be allowed within leased areas unless TDOC staff is available or approved otherwise by TDOC staff.
- Cleaning products need to be low in Volatile Organic Compound and moderately acidic or alkaline.
- Janitorial services need to inspect building walls, and systems and ventilation ductwork, monthly, to confirm no freestanding water, mold, or mildew is present.

**N. Building Evacuation Plans:**

- Provide drawings showing only walls and room names. These drawings will be used for start-up planning and fire evacuation diagrams by TDOC.
- Include room and door numbers.

**Schedule 6: Purchase Option**  
**GENERAL SPECIFICATIONS**

\* OPTION TO PURCHASE. The Landlord shall grant to the Tenant the option to purchase the property. The option to purchase shall be exercised by written notice from the Tenant to the Landlord during the \_\_\_\_ - year term of the lease or any renewal option, extension, or holdover. The closing of the sale is not required to occur during the \_\_\_\_ - year term of the lease or any renewal option, extension, or holdover. Upon the exercise of the purchase, the Landlord shall be the Seller and the terms of the sale shall be as follows:

- | <u>1. Date Option Exercised</u> | <u>Purchase Price</u> |
|---------------------------------|-----------------------|
| During first year of lease      | \$ _____              |
| During second year of lease     | \$ _____              |
| During third year of lease      | \$ _____              |
| During fourth year of lease     | \$ _____              |
| During fifth year of lease      | \$ _____              |
| During sixth year of lease      | \$ _____              |
| During seventh year of lease    | \$ _____              |
| During eighth year of lease     | \$ _____              |
| During ninth year of lease      | \$ _____              |
| During tenth year of lease      | \$ _____              |
| During eleventh year of lease   | \$ _____              |
| During twelfth year of lease    | \$ _____              |
| During thirteenth year of lease | \$ _____              |
| During fourteenth year of lease | \$ _____              |
| During fifteenth year of lease  | \$ _____              |
2. The property shall include the leased premises, the improvements, and all items of personal property and fixtures owned by Seller that are either attached or placed upon the leased premises. Personal property shall not include items not owned by the Seller or items specifically excluded by the parties.
  3. The State will furnish and pay for title insurance or attorney's certificate of title at the State's discretion.
  4. The State shall remain in possession of the property from the date the purchase option is exercised until the sale is closed, provided the lease remains in full force and effect.
  5. The State will verify the corners of the property, by survey or other means, to its satisfaction and at its cost.
  6. All taxes for the year in which the purchase option is exercised will be pro-rated and the Seller will pay any back taxes.

7. The Seller will render good and valid title in fee simple by general warranty deed, with covenants for title and free of encumbrances, on or before the date of closing unless both parties agree to a later date in writing.
8. The property shall be deeded to "THE STATE OF TENNESSEE" unless otherwise required by statute.
9. The closing of the sale shall take place within ninety (90) days from the exercise of this purchase option.
10. The State shall make full payment of the agreed purchase price in cash on the date of the closing.

***\*All blanks in the first paragraph to be filled out by the Tenant, should the purchase option be exercised, and provided with written notice of intention to exercise the purchase option.***

**Schedule 7: Exhibit D**  
**GENERAL SPECIFICATIONS**

As applicable, Tenant to provide a written list of any outstanding punch list items simultaneously with Exhibit C of the lease when rent is ready to commence. Landlord agrees to have outstanding punch list items remedied within 30 days of rent commencement. Any outstanding punch list item that is not cured is considered an act of default pursuant to Section 7, Sub Section B, of this Lease.

Lessor required to provide licensed electrician for electrical needs (ie junction boxes, power poles for furniture, security, or dedicated circuits as programmatic needs may require), and invoice State separately including invoice backup, upon move out of space.

**1. General**

- a. The Leased Premises, including all common areas and points of ingress and egress, shall be designed and maintained to meet all applicable code requirements for commercial office building construction, including the requirements of the Americans with Disabilities Act.
- b. The Leased Premises shall have a current occupancy permit issued by the local jurisdiction at the time of Tenant's occupancy.

**2. Site**

- a. The site shall be fully graded, landscaped and maintained in a manner commensurate with market for comparable properties of the same property type and class as the Leased Premises.

**3. Structure**

- a. Space above ceilings must allow sufficient clearance for ease of installation of Tenant's mechanical and electrical equipment, including but not limited to distribution ductwork, HVAC boxes, lighting and conduit.
- b. The building foundation and below-grade spaces shall be protected with a properly installed foundation drainage and waterproofing system.

**4. Building Skin and Roof**

- a. The building skin and roof will be complete and weather-tight including all exterior finish materials, cladding, sealants, glass and glazing including vision and spandrel glass, store front glass, exterior doors and hardware, membrane or built-up roofing, ballast, flashing, and other elements required to make the building weather-tight.

**5. Building Common Areas**

- a. The building entrance lobby, common corridors, restrooms, mechanical spaces, loading dock, trash removal spaces, and other common areas will be substantially complete.
- b. Restrooms shall be complete with all fixtures, partitions, accessories, lavatories, lavatory tops, and mirrors. Fixtures, partitions, and accessories shall be institution grade or better, and shall be water saving type, as appropriate. The finishes in restrooms shall be commensurate with market for comparable properties of the same property type and class as the Leased Premises.

**6. Common Walls**

- a. Common walls shall include slab-to-slab gypsum wallboard on the public side of all demising walls, corridors, stairwells, and other walls not interior to the Tenant space. All common walls shall be taped, blocked, finished and sanded. Landlord will install sound attenuation insulation on Tenant side of Common Walls and demising walls prior to Tenant finishes being installed.
- b. Common walls shall include entry and exit doors from common areas furnished and installed by Landlord. Doors and hardware shall be building standard or better.

**7. Electrical**

- a. Landlord shall provide a minimum of 7 watts per square foot for lighting and power.

- b. Landlord shall install all main switchboards, panel boards, distribution boards, transformer, bus duct, feeders and other equipment to completely distribute power to electrical closets on each floor in the Leased Premises. Landlord shall locate an electrical service panel in the electrical closet in the Common Area on the same floor as the Leased Premises. Installation of electrical service up to and including the Tenant's service panel(s) shall be a base building cost.
- c. Landlord shall install all wiring, branch circuiting, conduit and devices for the complete electrical system to all public and common areas. Landlord shall provide at Landlord's expense all power wiring and connection for all mechanical equipment furnished as part of base building. Landlord shall provide at Landlord's expense all power wiring to life safety and fire protection systems.

## **8. Communications**

- a. Landlord shall bring BUSINESS data/telephone service, as provided by the local data/telephone operating company, to the building Main Telephone Room.

## **9. Lighting**

- a. Landlord shall furnish and install lights in all common areas.
- b. Building lighting levels must meet a minimum of 30 foot-candles at the desk and 20 foot-candles in corridors providing ingress and egress to the Leased Premises. Base building shall include a lighting level of at least 10 foot-candles or minimum levels to insure safety in other interior areas as set by the current version of the Illuminating Engineering Society of North America (IESNA). All lighting fixtures should be cleaned at commencement and bulbs and ballasts in working order.

## **10. Plumbing**

- a. Plumbing tie-ins shall be provided for State's use for break room or other functions required by the Permitted Use.

## **11. HVAC**

- a. Building common areas shall include heating, ventilation, and air conditioning systems in accordance compliance with current ASHRAE standards.
- b. All HVAC for the Leased Premises shall be installed with complete distribution to ceiling mounted diffusers and perimeter slot diffusers for exterior zones and distribution to VAV boxes for interior zones.

## **12. Building Directory**

- a. If the Building has multiple tenants, Landlord shall provide a directory in the lobby of the Building.
- b. Landlord shall add Tenant's name to directory, and shall provide Tenant suite signage (suite entry door plaque or hall plaque, matching building graphics standards).

## **13. Keys**

- a. Landlord shall supply Tenant with five (5) sets of keys at no cost. Additional keys shall be provided at Tenant's request at a reasonable cost. Keys should allow access to the Leased Premises, parking areas and other common areas of the Property.

## **14. Access Control**

- a. Landlord shall provide new locks on all exterior doors and doors into common areas.
- b. Tenant may install card access to the Leased Premises at suite entry locations, fire stairs with access into the Leased Premises and interior doors within the Leased Premises compatible with the base building security system. Landlord to provide required infrastructure (ie electricity for system).
- c. Tenant may install keypad, pursuant to Tenant requirements, to the Leased Premises at approved entry and exit of Leased Premises. Landlord to provide required infrastructure (ie electricity for system). Landlord is required to purchase keypad system, but provide backup invoices for Tenant reimbursement.
- d. Tenant may install cameras or other security-related systems, pursuant to Tenant requirements, for the Leased Premises. Landlord to provide required infrastructure (ie electricity for system).

- e. Provide heavy-duty cylindrical hardware within suite and heavy duty mortised lockset at suite entry doors.
- f. Provide locksets on the following doors: offices, enclaves, communication rooms, utility rooms, storage/file rooms, network rooms.

## **INTERIOR BUILDOUT SPECIFICATIONS**

### **1. Ceiling**

- a. Existing ceiling tile and grid shall remain if these materials meet the Minimum Qualification Specification (Section e below) and are in good and attractive condition. Patch and repair grid as needed to accommodate demolition of walls. Replace any damaged or discolored tiles to match existing.
- b. Existing lighting shall be cleaned and re-lamped after construction. All lamps shall be the same color temperature. Coordinate the appropriate lamp color with the State.
- c. Provide 15'-20' whip at all above-ceiling junction boxes for power pole connections.
- d. Minimum ceiling heights shall be a minimum of 8 feet and be proportionate to the open area floor plate size.
- e. Acoustical Panel Ceiling Minimum Qualification Specifications:
- f. General Ceiling
  - i. Acoustical Panel Standard: Comply with ASTM E 1264.
  - ii. Metal Suspension System Standard: Comply with ASTM C 635.
  - iii. Attachment Devices: Size for five times the design load indicated in ASTM C 635, Table 1, "Direct Hung," Comply with seismic design requirements.
- g. Acoustical Panels
  - i. Color: White.
  - ii. LR: Minimum of 0.83.
  - iii. NRC: Minimum of 0.60, Type E-400 mounting according to ASTM E 795.
  - iv. CAC: Minimum of 33.
  - v. Modular Size: 24 by 24 inches (610 by 610 mm) or 24 by 48 inches (610 by 1220 mm).

### **2. Electrical and Communication**

- a. Provide and install conduit, conductors, pull wires, boxes, cover plates, devices, etc., for all outlets as required by the Build Out Plans. All devices shall be a consistent color.
- b. Contractor shall be responsible for all coordination and final electrical connections for furniture (systems furniture, conference/training tables, etc.). Coordinate with State for specifics on wiring configurations. For general planning purposes, provide 1 circuit per every 2 standard workstations as required by the Build Out Plans.
- c. Provide 1 voice/data per standard workstation as required by the Build Out Plans.
- d. Provide 2 duplex power outlets and 1 voice/data per standard office as required by the Build Out Plans.
- e. Provide 2 duplex power outlets and 1 voice/data per enclave as required by the Build Out Plans.
- f. At minimum, all enclosed rooms (such as storage and file rooms) to have (2) convenience duplex power outlets as required by the Build Out Plans.



- g. Lighting and controls shall be properly zoned. Separate light switches for hardwall spaces shall be provided as required by the Build Out Plans.

### 3. Partitions

- a. All existing perimeter sill walls and core walls throughout space shall be freshly painted in an eggshell or satin paint finish.
- b. All new partitions to be 5/8" drywall and 3 5/8" metal studs with sound attenuation blankets inside the partition. Additional sound blankets to be provided above partitions on ceiling tile, 2'-0" on either side of all new or existing partitions not extending to the deck.
- c. Partitions around all new conference rooms, training rooms, break rooms, meeting rooms, and restrooms, shall extend to the deck. Sound attenuation blankets shall be provided inside the partition, seal all penetrations within partitions including power/data boxes and at the connection of the partition to the deck.
- d. Connections from partition to mullion will require an acoustically sealed connection.
- e. Finish partitions completely to floor.

### 4. Glazing

- a. All office, enclave, break room, and conference room front walls shall have a 3'-0" wide sidelite with 1/4" clear tempered glass in 2" welded hollow metal frame with a solid core door (match building standard), and etched film on 3'-0"w full height sidelights. Framing for glass sidelights and windows shall be integral with doorframes and not separated by drywall.

### 5. Doors and Frames

- a. Interior doors shall match building standard height and finish; at a minimum, all doors shall be solid core, 7'-0" in height.
- b. Interior doorframes shall be 2" welded hollow metal steel, painted.
- c. All hardware shall match existing building standard finish. At a minimum, all hardware shall be lever handle. All doors shall include the following: doorstops, silencers, lever hardware, mortised ball bearing hinges. All office doors shall include a coat hook. In addition, pairs of doors shall include the following as determined by function: dummy trim, closer coordinators, flush bolts, dust proof strikes, ball catch (as required).
- d. All main entrance public access doors shall be metal frame glass storefront entrance type with double-pane glass. Exterior exit doors shall be metal framed with insulated flush type metal door. All exterior doors must be equipped with commercial grade closers and hardware.

### 6. Window Treatments

- a. All exterior windows shall be equipped with inside mount aluminum horizontal mini-blinds of color and quality acceptable to the State. State may determine that repair or replacement, in part or entirety, of existing blinds is acceptable.

### 7. Finishes

- a. Doors, frames, hardware, ceiling tile and grid and lights shall be reused if approved by the State.
- b. Carpet shall be modular tiles laid with low VOC adhesives. Carpet shall generally be laid in a monolithic, ashlar or brick laid pattern. Carpet shall not be laid in a quarter turn pattern unless noted specifically. If not replaced, existing floors must be cleaned as appropriate prior to Commencement.
- c. Carpet must meet the following minimum qualification specifications:
  - i. Products: All manufacturers to provide modular tile products as specified below and in addition to meeting the minimum requirements.
  - ii. Commercial Face Fibers: High performance premium branded Nylon required to be third party certified post-consumer recyclable and defined as a commercial grade nylon fiber from a carpet or fiber

manufacturer nationally recognized by the flooring industry; the nylon fiber shall have a documented five (5) year minimum successful testing period; Note: OLEFIN FIBER IS NOT ACCEPTABLE.

- iii. Pile Characteristic: Level-loop, Cut-and-loop pile, Shear-and-loop pile.
- iv. Density: Minimum rating of 5,000 or higher.
  - v. Stitches: Minimum of 9 stitches per inch.
  - vi. Gage: 1/12 inch minimum.
  - vii. Surface Pile Weight: Minimum 20 oz. per square yard.
- viii. Dye System: Minimum of 50% solution dyed or yarn dyed (Type 6, Type 6,6 or proven equal).
- ix. Backing System: Provide applicable backing system based on carpet type/brand selected.
  - x. Size: 24 by 24 inches (610 by 610 mm) or larger.
  - xi. Applied Soil-Resistance Treatment: Duratech, Protech, or equal (specify with proposal).
  - xii. Antimicrobial Treatment: Manufacturer's standard material according to AATCC174.
- d. Provide 4" covered rubber base in areas specified to receive new flooring. All base shall be continuous roll base (not 4' segments).
- e. All walls to have one prime coat and 2 finish coats of eggshell or satin finish. Door and window frames shall have semi-gloss finish. Drywall ceilings shall have flat finish. State may determine that only touch up is required. New paint may be required for short-term leases.
- f. Where identified as laminate finish on casework, use color core laminates for exposed surfaces for doors, drawers, counter tops and splashes. The underside of all vertical laminate panels in wet areas shall receive a laminate or pvc edge to prevent water from wicking up through laminate panel substrates. Counters and splashes shall be thoroughly caulked to walls and countertops using clear silicone caulk.

#### **8. Break Rooms**

- a. Finishes: VCT floor tile in a floor pattern using 3 different colors, plastic laminate base and wall cabinets. New floor tile must be waxed and sealed prior to Commencement. Upon State determination, if existing floor tile is not replaced, existing floor tile must be waxed and sealed prior to Commencement.
- b. Provide double bowl, under mount stainless steel sink with hot/cold water.
- c. Provide dedicated outlets for refrigerators, microwaves, and (2) coffee makers. Provide (3) standard wall duplex outlets at 42" AFF in kitchen area. Provide (2) additional wall outlets at other walls for convenience purposes.

#### **9. Copy Rooms / Areas**

- a. Finishes: VCT flooring, plastic laminate base and wall cabinets, plastic laminate countertop. Cabinetry shall be sufficient to meet the needs of the Tenant at its sole discretion. New floor tile must be waxed and sealed prior to Commencement. Upon State determination, if existing floor tile is not replaced, existing floor tile must be waxed and sealed prior to Commencement.
- b. Provide (2) wall duplex outlets (one circuit) and (2) voice/data outlets at 42" AFF in work area.

#### **10. Telecom Rooms**

- a. Finishes: VCT flooring, 4" rubber base. New floor tile must be waxed and sealed prior to Commencement. Upon State determination, if existing floor tile is not replaced, existing floor tile must be waxed and sealed prior to Commencement.
- b. Walls shall extend to deck; no lay-in ceiling.
- c. A minimum of a half-ton (5,000 BTU's) of cooling for coverage of equipment is required. Stand-alone mechanical unit is preferred. If stand-alone is not possible, then the space should be removed from the EMS and have VAV-type controls.
- d. Provide at least a 3" conduit from the interior telecom room or non-common space to an exterior right of way or utility easement for new service provider connection. Coordinate with service provider.

- e. Each telecom room should be a minimum of 8' x 10' in size, with one room per 15,000 square feet of usable space. Telecom rooms shall align vertically if in a multiple-floor facility.
- f. Doors to telecom rooms shall open out into the corridor, if possible. If this is not possible, then locate the door in an area with minimal clearance impact.
- g. Provide at least (2) dedicated quad outlets, 110 volt, 20 amp circuits, in addition to the normal service outlets.
- h. The State cabling contractor, at State's expense, shall install a grounding bus bar and place correctly-sized conductor back to the main panel for facility personnel to connect.
- i. Telecom rooms do not include space for building/energy automation/management, life safety controls, or security, audio, or CC/CATV systems.

#### **11. Conference Rooms**

- a. All conference rooms that seat (8) people or more shall have (2) power and voice/data outlets. Larger Conference rooms of greater than (18) people shall have (4) power and (2) voice/data outlets.
- b. Lighting switching shall provide flexibility for a variety of scene configurations for different presentations and meetings. Fixtures shall provide both ambient lighting to the table as well as accent wall wash lighting at the perimeter of the room.
- c. Coordinate placement of switches, AV screens, furniture, & doors so as to avoid conflicts when components are in use.

#### **12. Restrooms**

- a. Finishes: VCT flooring, 4" rubber base. New floor tile must be waxed and sealed prior to Commencement. Upon State determination, if existing floor tile is not replaced, existing floor tile must be waxed and sealed prior to Commencement.
- b. All restrooms shall be equipped with liquid soap dispensers and mirrors, and either paper towel dispensers or hand blow dryers.
- c. Provide a floor drain in each restroom.

#### **13. Janitor Closet**

- a. Finishes: VCT flooring, 4" rubber base. New floor tile must be waxed and sealed prior to Commencement. Upon State determination, if existing floor tile is not replaced, existing floor tile must be waxed and sealed prior to Commencement.
- b. Provide storage for equipment, materials, and supplies, in a minimum 25 sf room.
- c. Provide service sink with hot and cold water and a floor drain.

#### **14. Building Interior**

- a. Provide (accessible) chilled drinking fountains as per code requirements. If it is deemed necessary to replace existing or incorporate additional drinking fountains, equipment shall be able to accommodate a water bottle refill component.
- b. Provide evacuation maps and other interior signage as required and requested by the State. Coordinate locations with the State. May be required for short-term leases.

#### **15. Building Exterior**

- a. Provide exterior canopies at all building entrances and exits, as well as a vestibule/airlock at all public entrances.
- b. Provide exterior signage and dumpster access. May be required for short-term leases. Exterior signage specifications are posted at [www.TNLPR.gov](http://www.TNLPR.gov)
- c. Hard-surface exterior walkways shall be provided to connect all Building entrances and exits to on-site parking lots or other hard-surfaced areas

