

LEASING PROPOSAL REQUEST

Agency, Office Name	Department of Human Services, Dickson County
Principal Use Office/Warehouse/Other	Office
Employee Headcount at Premises	17
Transaction Number	19-12-902

	Desired	Alternates Accepted
Service Area and Boundary Requirements	Dickson County, preferably within the City of Dickson. As this office provides services to the public, the preferred location is readily observable and accessible from a public road, which includes ease of access and identifiable exterior signage.	
Parking Requirements	Paved, lighted, striped and free parking for a minimum of 24 parking spaces (12 for Staff and 12 for Visitors). The parking provided shall include handicap parking to meet the relevant code requirements.	No
Usable & Rentable Contiguous Square Footage	<u>3,500 - 3,900 USF</u> <u>3,900 - 4,300 RSF</u> Proposals with square footages having a <u>10%</u> deviation (up or down) will be considered an alternate. The State intends "contiguous" to mean space that is adjacent including floors below or above. The actual square footage will be determined by programming and space planning.	No
Special Buildout and Other Specifications	See Schedule 1 attached. A base building that is of sound and substantial construction, safe and secure for user-agency and respective clients, and is capable of meeting the Landlord Delivery Requirements defined in Exhibit D of the Lease. When available, the preferred location provides municipal water and sewer systems.	Yes
Term Length	FIVE (5) Years plus Two (2) 1-Year Options for Renewal for a Total Term of Up to SEVEN (7) Years	Yes
Commencement Date	Commencement expected within 12 months of lease execution	Yes
Termination Options	Standard State language Termination for Cause and Convenience with 90-day cancellation upon written notice, as negotiation permits	Yes
Terms and Conditions	As set forth in Pro Forma Lease. A copy of the Pro Forma lease form can be found by visiting www.tn/pr.gov .	Yes

<p>Utility, Services and Other Costs</p>	<p>Preference is for FULL SERVICE Gross lease with no pass throughs; however, Proposal may be quoted as MODIFIED GROSS with Tenant paying Utilities and/or Janitorial.</p> <p>Utilities must be separately metered for Modified Gross consideration.</p>	<p>Yes</p>
---	--	------------

Communications:

Interested parties must direct all communications regarding this procurement to the Cristina Johnstone, Leasing Coordinator who is the State’s official point of contact. Email is the preferred form of communication.

Name: Cristina Johnstone

Phone Number: 615-939-3108

Email: Cristina.Johnstone@tn.gov

Submittal Deadline and Format:

The completed “Lease Proposal Quote Form” (Section II) **must** be submitted as follows no later than **4:00 PM CST on January 9, 2020.**

Submittals must be received via either:

Email: RFP.Coordinator@tn.gov

Or

Printed copy to:

Department of General Services/STREAM
 Attn: Nickie Smith, Procurement Specialist
 William R. Snodgrass Tennessee Tower 3rd floor
 312 Rosa L. Parks Avenue, Nashville, TN 37243
 Phone: 615-428-9840

Method of Evaluation:

Please refer to the State of Tennessee Real Estate Asset Management Division website for the complete document, which describes the proposal evaluation method, by using the following link:

www.tnlpr.gov

Disclaimer of Subjectivity:

Proposers should understand and accept that by responding to this solicitation they are willingly participating in a process that may consist of some degree of subjectivity. Proposers should be aware that the proposal determined to best meet the needs of the State may not necessarily be the lowest cost proposal.

SCHEDULE 1

Special Build Out Specifications:

The space must be professional office use and capable of meeting all of the requirements of the agency, including geographic location, square footage, parking and any special requirements identified below and in the Schedules.

Landlord shall furnish and install metal window blinds for all exterior windows.

See the Pro Forma Lease document - Exhibit D for General Specifications and Interior Design Standards.

Attachments:

- Schedule 2: DHS Preliminary Zone Placement Summary Sheet
- Schedule 3: DHS Space Needs Analysis
- Schedule 4: DHS Concept Study Plan
- Schedule 5: Exhibit D to Lease Agreement
- Schedule 6: Transaction Window Elevation

SCHEDULE 2
DHS PRELIMINARY ZONE PLACEMENT SUMMARY SHEET
(Subject to revision in final plan approved by State design team)



DHS Dickson County Summary Sheet

Staff Counts – Total Staff 17

Eligibility Counselor – 8

Eligibility Assistant – 1

Admin Sec – 1

Secretary – 1

Field Supervisor – 1

Field Managing Director – 1

Program Coordinator – 1

Field Managing Director 3 – 1

Family Focus Counselor – 1

Field Supervisor (APS) – 1

Zone One (Public Zone) – refer to sample plan for zone locations

Hard Wall Spaces

1. Waiting Room (400sf) – seating for 15 people
 - Public computer access (50sf)
 - Staff/Client Window Bays (55sf) – 2
 - Secretary (1)
 - Eligibility Assistant (1)
 2. Accessible Public Restrooms – quantity determined by plumbing code requirements (Client and Staff restrooms will be separate and will not share a plumbing wall)
 3. Conference Room (295 sf) – seating for 18 people
(Access to conference room from both zones required – refer to sample plan)
 4. Enclaves (120sf) – 1
(Access to conference room from both zones required – refer to sample plan)
- (Secure access to Zone Two from here)



Zone Two (Intermediate/Staff Zone) – refer to sample plan for zone locations

Hard Wall Spaces

1. Assigned Office (120sf) – 2
FMD1 (1)
FMD3 (1)
2. Enclaves (120sf) – 1
3. Break Room (120sf) (sized for 14 staff) (refer to lease for exact requirements in break room)
4. Supply Storage Room (100sf)
5. Telecom Room (48sf) (room must be temperature controlled)
6. Accessible Staff Restrooms (Client and Staff restrooms will be separate and will not share a plumbing wall)

Open Office (systems furniture)

1. Assigned Workstation (49sf) – 2
Field Supervisor (1)
Admin Secretary (1)
2. Quiet Free Address Workstations (49sf* - see clients) – 5** (note: if staff space is shared with another state agency, these stations shall be located in Zone One)
3. Quiet Free Address Workstation (30sf) – 4
4. Collaborative Open Table (located adjacent to power/data)(100sf) – 1
5. Mail Area (36sf) – 1
6. Print Area (50sf) – 1
7. Recycle Bin (6sf)
8. Shredder Bin (6sf)
9. Locker Units (48sf) - 3
10. Lateral File Cabinets in Open Area (24sf) - 3

*See Workstation Legend below

** Workstations that see clients/may see clients should be grouped together and separated from the other workstations if possible (refer to sample plan)

Workstation Legend	
25sf Quiet Or Collaborative^	Pin Wheels, 24x60 Hoteling
30sf Quiet Or Collaborative^	30x72 Hoteling
49sf Quiet Or Assigned	Full Size Stations, Glass Front cubicle
Collaborative Open Area	Enclave table with 4 chairs, Tablet arm lounge chairs, Worksurface on top of storage with 4 stools

^Quiet or Collaborative function determined by panel height

SCHEDULE 3
DHS SPACE NEEDS ANALYSIS
 (Subject to revision in final plan approved by State design team)

Prepared By: FMG
 Checked By:

Space Needs Analysis Report
 SNA Number: 34501-22-01
 Agency: Human Services
 County: DICKSON City: Dickson
 Employees: 17

SNA Date: 04-22-2019

Area Needed: 2,286
 Major Circulation: 50% 1,143
 Total Net Usable Needed: 3,429

SNA Note: AWS project. Report completed per information approved and supplied by Claire Claytor.

Space Type	Standard Description	Wall	Area	Count	Memo
P	00000 Admin. Secretary	0	49	1	
P	00000 APS Field Supervisor	None	0	1	Mobile. Space provided in Free Address area. Positions will use Free Address area when in office.
P	08118 Eligibility Assistant	0	55	1	Reception
P	79822 Eligibility Counselor	None	0	8	Mobile. Space provided in Free Address area. Positions will use Free Address area when in office.
P	00000 Family Focus Counselor	None	0	1	Mobile. Space provided in Free Address area. Positions will use Free Address area when in office.
P	79881 Field Supervisor	0	49	1	
P	00000 FMD1	H	120	1	
P	00000 FMD3	H	120	1	
P	00000 Program Coordinator	None	0	1	Mobile. Space provided in Free Address area. Positions will use Free Address area when in office.
P	00000 Secretary	0	55	1	Reception
S	BR Break Room	H	120	1	With base and wall cabinets, countertop with sink.
S	CA Collaborative Area	0	100	1	
S	CR Conference Room	H	295	1	Seating for 18.
S	E Enclave	H	120	2	
S	FAH Free Address Hoteling	0	49	5	
S	FAH Free Address Hoteling	0	30	4	
S	FAL Free Address Lockers	0	48	1	Space for 3 - locker units. Each unit contains 6 - lockers per unit. Used by free address staff.
S	MA Mail Area	0	36	1	
S	MFP Multi-Function Printer	0	50	1	
S	PSB Paper Shredder Bin	0	6	1	
S	RB Recycle Bin	0	6	1	

Printed On 4/22/2019

Page 1 of 2


SNA Number: 34501-58-01

Space Type	Standard Description	Wall	Area	Count	Memo	
S	SR	Supply Room	H	100	1	
S	TC	Telephone Closet	H	48	1	For telephone and computer equipment. Room must be temperature controlled.
S	WR	Waiting Room	H	600	1	Space for 20 chairs, Security check-in (80 sq.ft.) and Public computer (50 sq.ft.) areas. With transaction countertops and pass-thru windows to Secretary and Eligibility Clerk. Will require direct access to client restroom.

Suggested Range:	Min.	Max.
Usable:	3,600	4,000
Rentable:	4,000	4,400

SCHEDULE 4 DHS CONCEPT STUDY PLAN

This is a concept plan to illustrate the two (2) security zones required for DHS. It should NOT be used to price construction but only to provide a "concept" of how DHS conducts business in the space. Each DHS office requirement differs for each county across Tennessee and the State reserves the right to layout the space to best fit the needs of DHS in Dickson County TN. Per Paragraph #19 (Landlord buildout) of the Lease Agreement, the State must approve the final design and construction plans.

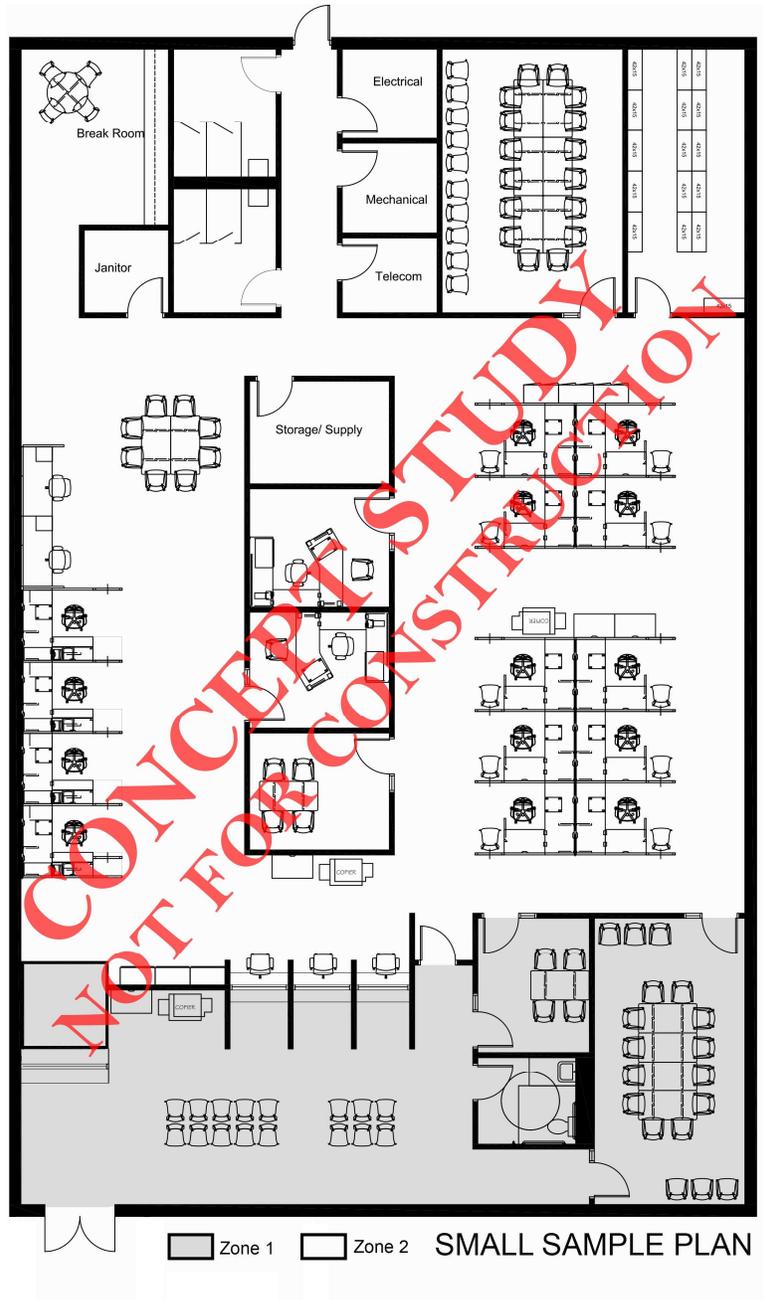

SCHEDULE 5
EXHIBIT D TO LEASE AGREEMENT
SPECIAL BUILDOUT AND OTHER SPECIFICATIONS

GENERAL SPECIFICATIONS

1. General

- a. The Leased Premises, including all common areas and points of ingress and egress, shall be designed and maintained to meet all applicable code requirements for commercial office building construction, including the requirements of the Americans with Disabilities Act.
- b. The Leased Premises shall have a current occupancy permit issued by the local jurisdiction at the time of Tenant's occupancy.

2. Site

- a. The site shall be fully graded, landscaped and maintained in a manner commensurate with market for comparable properties of the same property type and class as the Leased Premises.

3. Structure

- a. Space above ceilings must allow sufficient clearance for ease of installation of Tenant's mechanical and electrical equipment, including but not limited to distribution ductwork, HVAC boxes, lighting and conduit.
- b. The building foundation and below-grade spaces shall be protected with a properly installed foundation drainage and waterproofing system.

4. Building Skin and Roof

- a. The building skin and roof will be complete and weather-tight including all exterior finish materials, cladding, sealants, glass and glazing including vision and spandrel glass, store front glass, exterior doors and hardware, membrane or built-up roofing, ballast, flashing, and other elements required to make the building weather-tight.

5. Building Common Areas

- a. The building entrance lobby, common corridors, restrooms, mechanical spaces, loading dock, trash removal spaces, and other common areas will be substantially complete.
- b. Restrooms shall be complete with all fixtures, partitions, accessories, lavatories, lavatory tops, and mirrors. Fixtures, partitions, and accessories shall be institution grade or better, and shall be water saving type, as appropriate. The finishes in restrooms shall be commensurate with market for comparable properties of the same property type and class as the Leased Premises.

6. Common Walls

- a. Common walls shall include slab-to-slab gypsum wallboard on the public side of all demising walls, corridors, stairwells, and other walls not interior to the Tenant space. All common walls shall be taped, blocked, finished and sanded. Landlord will install sound attenuation insulation on Tenant side of Common Walls and demising walls prior to Tenant finishes being installed.
- b. Common walls shall include entry and exit doors from common areas furnished and installed by Landlord. Doors and hardware shall be building standard or better.

7. Electrical

- a. Landlord shall provide a minimum of 7 watts per square foot for lighting and power.
- b. Landlord shall install all main switchboards, panel boards, distribution boards, transformer, bus duct, feeders and other equipment to completely distribute power to electrical closets on each floor in the Leased Premises. Landlord shall locate an electrical service panel in the electrical closet in the Common Area on the same floor as the Leased Premises. Installation of electrical service up to and including the Tenant's service panel(s) shall be a base building cost.

- c. Landlord shall install all wiring, branch circuiting, conduit and devices for the complete electrical system to all public and common areas. Landlord shall provide at Landlord's expense all power wiring and connection for all mechanical equipment furnished as part of base building. Landlord shall provide at Landlord's expense all power wiring to life safety and fire protection systems.

8. Communications

- a. Landlord shall bring data/telephone service, as provided by the local data/telephone operating company, to the building Main Telephone Room.

9. Lighting

- a. Landlord shall furnish and install lights in all common areas.
- b. Building lighting levels must meet a minimum of 30 foot-candles at the desk and 20 foot-candles in corridors providing ingress and egress to the Leased Premises. Base building shall include a lighting level of at least 10 foot-candles or minimum levels to insure safety in other interior areas as set by the current version of the Illuminating Engineering Society of North America (IESNA).

10. Plumbing

- a. Plumbing tie-ins shall be provided for State's use for break room or other functions required by the Permitted Use.

11. HVAC

- a. Building common areas shall include heating, ventilation, and air conditioning systems in accordance compliance with current ASHRAE standards.
- b. All HVAC for the Leased Premises shall be installed with complete distribution to ceiling mounted diffusers and perimeter slot diffusers for exterior zones and distribution to VAV boxes for interior zones.

12. Building Directory

- a. If the Building has multiple tenants, Landlord shall provide a directory in the lobby of the Building.
- b. Landlord shall add Tenant's name to directory, and shall provide Tenant suite signage (suite entry door plaque or hall plaque, matching building graphics standards).

13. Keys

- a. Landlord shall supply Tenant with five (5) sets of keys at no cost. Additional keys shall be provided at Tenant's request at a reasonable cost. Keys should allow access to the Leased Premises, parking areas and other common areas of the Property.

14. Access Control

- a. Landlord shall provide new locks on all exterior doors and doors into common areas.
- b. Tenant may install card access to the Leased Premises at suite entry locations, fire stairs with access into the Leased Premises and interior doors within the Leased Premises compatible with the base building security system.
- c. Provide heavy-duty cylindrical hardware within suite and heavy duty mortised lockset at suite entry doors.
- d. Provide locksets on the following doors: offices, enclaves, communication rooms, utility rooms, storage/file rooms, network rooms.

INTERIOR BUILDOUT SPECIFICATIONS

1. Ceiling

- a. Existing ceiling tile and grid shall remain if these materials meet the Minimum Qualification Specification (Section e below) and are in good and attractive condition. Patch and repair grid as needed to accommodate demolition of walls. Replace any damaged or discolored tiles to match existing.
- b. Existing lighting shall be cleaned and re-lamped after construction. All lamps shall be the same color temperature. Coordinate the appropriate lamp color with the State.
- c. Provide 15'-20' whip at all above-ceiling junction boxes for power pole connections.
- d. Minimum ceiling heights shall be a minimum of 8 feet and be proportionate to the open area floor plate size.
- e. Acoustical Panel Ceiling Minimum Qualification Specifications:
- f. General Ceiling
 - i. Acoustical Panel Standard: Comply with ASTM E 1264.
 - ii. Metal Suspension System Standard: Comply with ASTM C 635.
 - iii. Attachment Devices: Size for five times the design load indicated in ASTM C 635, Table 1, "Direct Hung," Comply with seismic design requirements.
- g. Acoustical Panels
 - i. Color: White.
 - ii. LR: Minimum of 0.83.
 - iii. NRC: Minimum of 0.60, Type E-400 mounting according to ASTM E 795.
 - iv. CAC: Minimum of 33.
 - v. Modular Size: 24 by 24 inches (610 by 610 mm) or 24 by 48 inches (610 by 1220 mm).

2. Electrical and Communication

- a. Provide and install conduit, conductors, pull wires, boxes, cover plates, devices, etc., for all outlets as required by the Build Out Plans. All devices shall be a consistent color.
- b. Contractor shall be responsible for all coordination and final electrical connections for furniture (systems furniture, conference/training tables, etc.). Coordinate with State for specifics on wiring configurations. For general planning purposes, provide 1 circuit per every 2 standard workstations as required by the Build Out Plans.
- c. Provide 1 voice/data per standard workstation as required by the Build Out Plans.
- d. Provide 2 duplex power outlets and 1 voice/data per standard office as required by the Build Out Plans.
- e. Provide 2 duplex power outlets and 1 voice/data per enclave as required by the Build Out Plans.
- f. At minimum, all enclosed rooms (such as storage and file rooms) to have (2) convenience duplex power outlets as required by the Build Out Plans.
- g. Lighting and controls shall be properly zoned. Separate light switches for hardwall spaces shall be provided as required by the Build Out Plans.

3. Partitions

- a. All existing perimeter sill walls and core walls throughout space shall be freshly painted in an eggshell or satin paint finish.
- b. All new partitions to be 5/8" drywall and 3 5/8" metal studs with sound attenuation blankets inside the partition. Additional sound blankets to be provided above partitions on ceiling tile, 2'-0" on either side of all new or existing partitions not extending to the deck.
- c. Partitions around all new conference rooms, training rooms, break rooms, meeting rooms, and restrooms, shall extend to the deck. Sound attenuation blankets shall be provided inside the partition, seal all penetrations within partitions including power/data boxes and at the connection of the partition to the deck.

- d. Connections from partition to mullion will require an acoustically sealed connection.
- e. Finish partitions completely to floor.

4. Glazing

- a. All office, enclave, break room, and conference room front walls shall have a 3'-0" wide sidelite with ¼" clear tempered glass in 2" welded hollow metal frame with a solid core door (match building standard), and etched film on 3'-0"w full height sidelights. Framing for glass sidelights and windows shall be integral with doorframes and not separated by drywall.

5. Doors and Frames

- a. Interior doors shall match building standard height and finish; at a minimum, all doors shall be solid core, 7'-0" in height.
- b. Interior doorframes shall be 2" welded hollow metal steel, painted.
- c. All hardware shall match existing building standard finish. At a minimum, all hardware shall be lever handle. All doors shall include the following: doorstops, silencers, lever hardware, mortised ball bearing hinges. All office doors shall include a coat hook. In addition, pairs of doors shall include the following as determined by function: dummy trim, closer coordinators, flush bolts, dust proof strikes, ball catch (as required).
- d. All main entrance public access doors shall be metal frame glass storefront entrance type with double-pane glass. Exterior exit doors shall be metal framed with insulated flush type metal door. All exterior doors must be equipped with commercial grade closers and hardware.

6. Finishes

- a. Doors, frames, hardware, ceiling tile and grid and lights shall be reused if approved by the State.
- b. Carpet shall be modular tiles laid with low VOC adhesives. Carpet shall generally be laid in a monolithic, ashlar or brick laid pattern. Carpet shall not be laid in a quarter turn pattern unless noted specifically.
- c. Carpet must meet the following minimum qualification specifications:
 - i. Products: All manufacturers to provide modular tile products as specified below and in addition to meeting the minimum requirements.
 - ii. Commercial Face Fibers: High performance premium branded Nylon required to be third party certified post-consumer recyclable and defined as a commercial grade nylon fiber from a carpet or fiber manufacturer nationally recognized by the flooring industry; the nylon fiber shall have a documented five (5) year minimum successful testing period; Note: OLEFIN FIBER IS NOT ACCEPTABLE.
 - iii. Pile Characteristic: Level-loop, Cut-and-loop pile, Shear-and-loop pile.
 - iv. Density: Minimum rating of 5,000 or higher.
 - v. Stitches: Minimum of 9 stitches per inch.
 - vi. Gage: 1/12 inch minimum.
 - vii. Surface Pile Weight: Minimum 20 oz. per square yard.
 - viii. Dye System: Minimum of 50% solution dyed or yarn dyed (Type 6, Type 6,6 or proven equal).
 - ix. Backing System: Provide applicable backing system based on carpet type/brand selected.
 - x. Size: 24 by 24 inches (610 by 610 mm) or larger.
 - xi. Applied Soil-Resistance Treatment: Duratech, Protech, or equal (specify with proposal).
 - xii. Antimicrobial Treatment: Manufacturer's standard material according to AATCC174.
- d. Provide 4" coved rubber base in areas specified to receive new flooring. All base shall be continuous roll base (not 4' segments).
- e. All walls to have one prime coat and 2 finish coats of eggshell or satin finish. Door and window frames

shall have semi-gloss finish. Drywall ceilings shall have flat finish.

- f. Where identified as laminate finish on casework, use color core laminates for exposed surfaces for doors, drawers, counter tops and splashes. The underside of all vertical laminate panels in wet areas shall receive a laminate or pvc edge to prevent water from wicking up through laminate panel substrates. Counters and splashes shall be thoroughly caulked to walls and countertops using clear silicone caulk.

7. Break Rooms

- a. Finishes: VCT floor tile in a floor pattern using 3 different colors, plastic laminate base and wall cabinets.
- b. Provide double bowl, under mount stainless steel sink with hot/cold water.
- c. Provide dedicated outlets for refrigerators, microwaves, and (2) coffee makers. Provide (3) standard wall duplex outlets at 42" AFF in kitchen area. Provide (2) additional wall outlets at other walls for convenience purposes.

8. Copy Rooms / Areas

- a. Finishes: VCT flooring, plastic laminate base and wall cabinets, plastic laminate countertop. Cabinetry shall be sufficient to meet the needs of the Tenant at its sole discretion.
- b. Provide (2) wall duplex outlets (one circuit) and (2) voice/data outlets at 42" AFF in work area.

9. Telecom Rooms

- a. Finishes: VCT flooring, 4" rubber base.
- b. Walls shall extend to deck; no lay-in ceiling.
- c. A minimum of a half-ton (5,000 BTU's) of cooling for coverage of equipment is required. Stand-alone mechanical unit is preferred. If stand-alone is not possible, then the space should be removed from the EMS and have VAV-type controls.
- d. Provide at least a 3" conduit from the interior telecom room or non-common space to an exterior right of way or utility easement for new service provider connection. Coordinate with service provider.
- e. Each telecom room should be a minimum of 8' x 10' in size, with one room per 15,000 square feet of usable space. Telecom rooms shall align vertically if in a multiple-floor facility.
- f. Doors to telecom rooms shall open out into the corridor, if possible. If this is not possible, then locate the door in an area with minimal clearance impact.
- g. Provide at least (2) dedicated quad outlets, 110 volt, 20 amp circuits, in addition to the normal service outlets.
- h. The State cabling contractor, at State's expense, shall install a grounding bus bar and place correctly-sized conductor back to the main panel for facility personnel to connect.
- i. Telecom rooms do not include space for building/energy automation/management, life safety controls, or security, audio, or CC/CATV systems.

10. Conference Rooms

- a. All conference rooms that seat (8) people or more shall have (2) power and voice/data outlets. Larger Conference rooms of greater than (18) people shall have (4) power and (2) voice/data outlets.
- b. Lighting switching shall provide flexibility for a variety of scene configurations for different presentations and meetings. Fixtures shall provide both ambient lighting to the table as well as accent wall wash lighting at the perimeter of the room.
- c. Coordinate placement of switches, AV screens, furniture, & doors so as to avoid conflicts when components are in use.

11. Restrooms

- a. All restrooms shall be equipped with liquid soap dispensers and mirrors, and either paper towel dispensers or hand blow dryers.

- b. Provide a floor drain in each restroom.

12. Janitor Closet

- a. Finishes: VCT flooring, 4" rubber base.
- b. Provide storage for equipment, materials, and supplies, in a minimum 25 sf room.
- c. Provide service sink with hot and cold water and a floor drain.


13. Building Interior

- a. Provide (accessible) chilled drinking fountains as per code requirements. If it is deemed necessary to replace existing or incorporate additional drinking fountains, equipment shall be able to accommodate a water bottle refill component.
- b. Provide evacuation maps and other interior signage as required and requested by the State. Coordinate locations with the State.

14. Building Exterior

- a. Provide exterior canopies at all building entrances and exits, as well as a vestibule/airlock at all public entrances.
- b. Provide exterior signage and dumpster access.
- c. Hard-surface exterior walkways shall be provided to connect all Building entrances and exits to on-site parking lots or other hard-surfaced areas.

**SCHEDULE 6
TRANSACTION WINDOW ELEVATION**

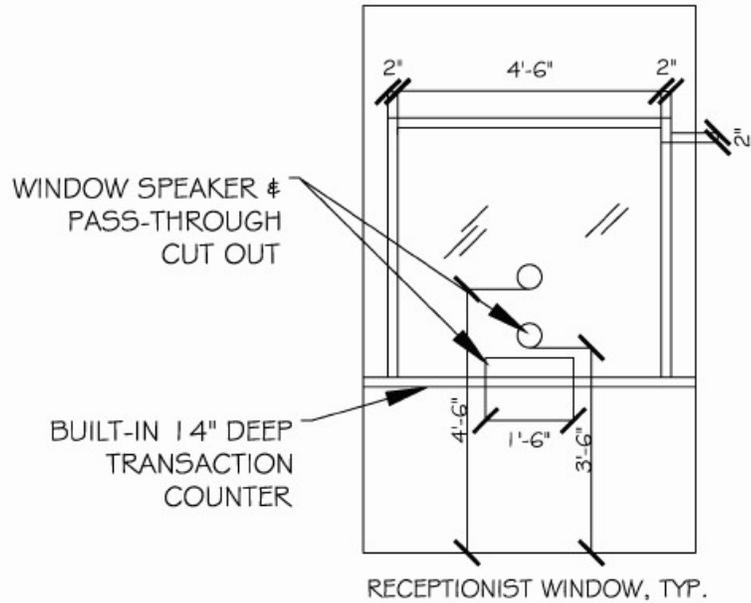

1
A2.1

DETAIL: RECEPTIONIST WINDOW, TYP.

SCALE: 1/2" = 1'-0"

DCS AND DHS TRANSACTION WINDOW

DCS AND DHS TRANSACTION WINDOW

NOT FOR CONSTRUCTION
 ***NOTE: This space plan, including furniture layout, has been developed based on programming information and input from the State of Tennessee and is considered to be the design intent. The Architect of Record will utilize this information to develop complete construction documents, in compliance with applicable codes and regulations.

STATE OF TENNESSEE
 DEPT. OF GENERAL SERVICES
 STREAM
 WRS Tennessee Tower, 24th
 312 Rosa L. Parks Ave
 Nashville, Tennessee 37243