




10/16/2020 12:13:26 PM
 P:\StandDraw\DESIGN STANDARDS\Standards Drawings\Standard Roadway Drawings - CURRENT\In Progress\10-104.00 Roadway, Pavement Appurtenances and Fence IP\RPD16

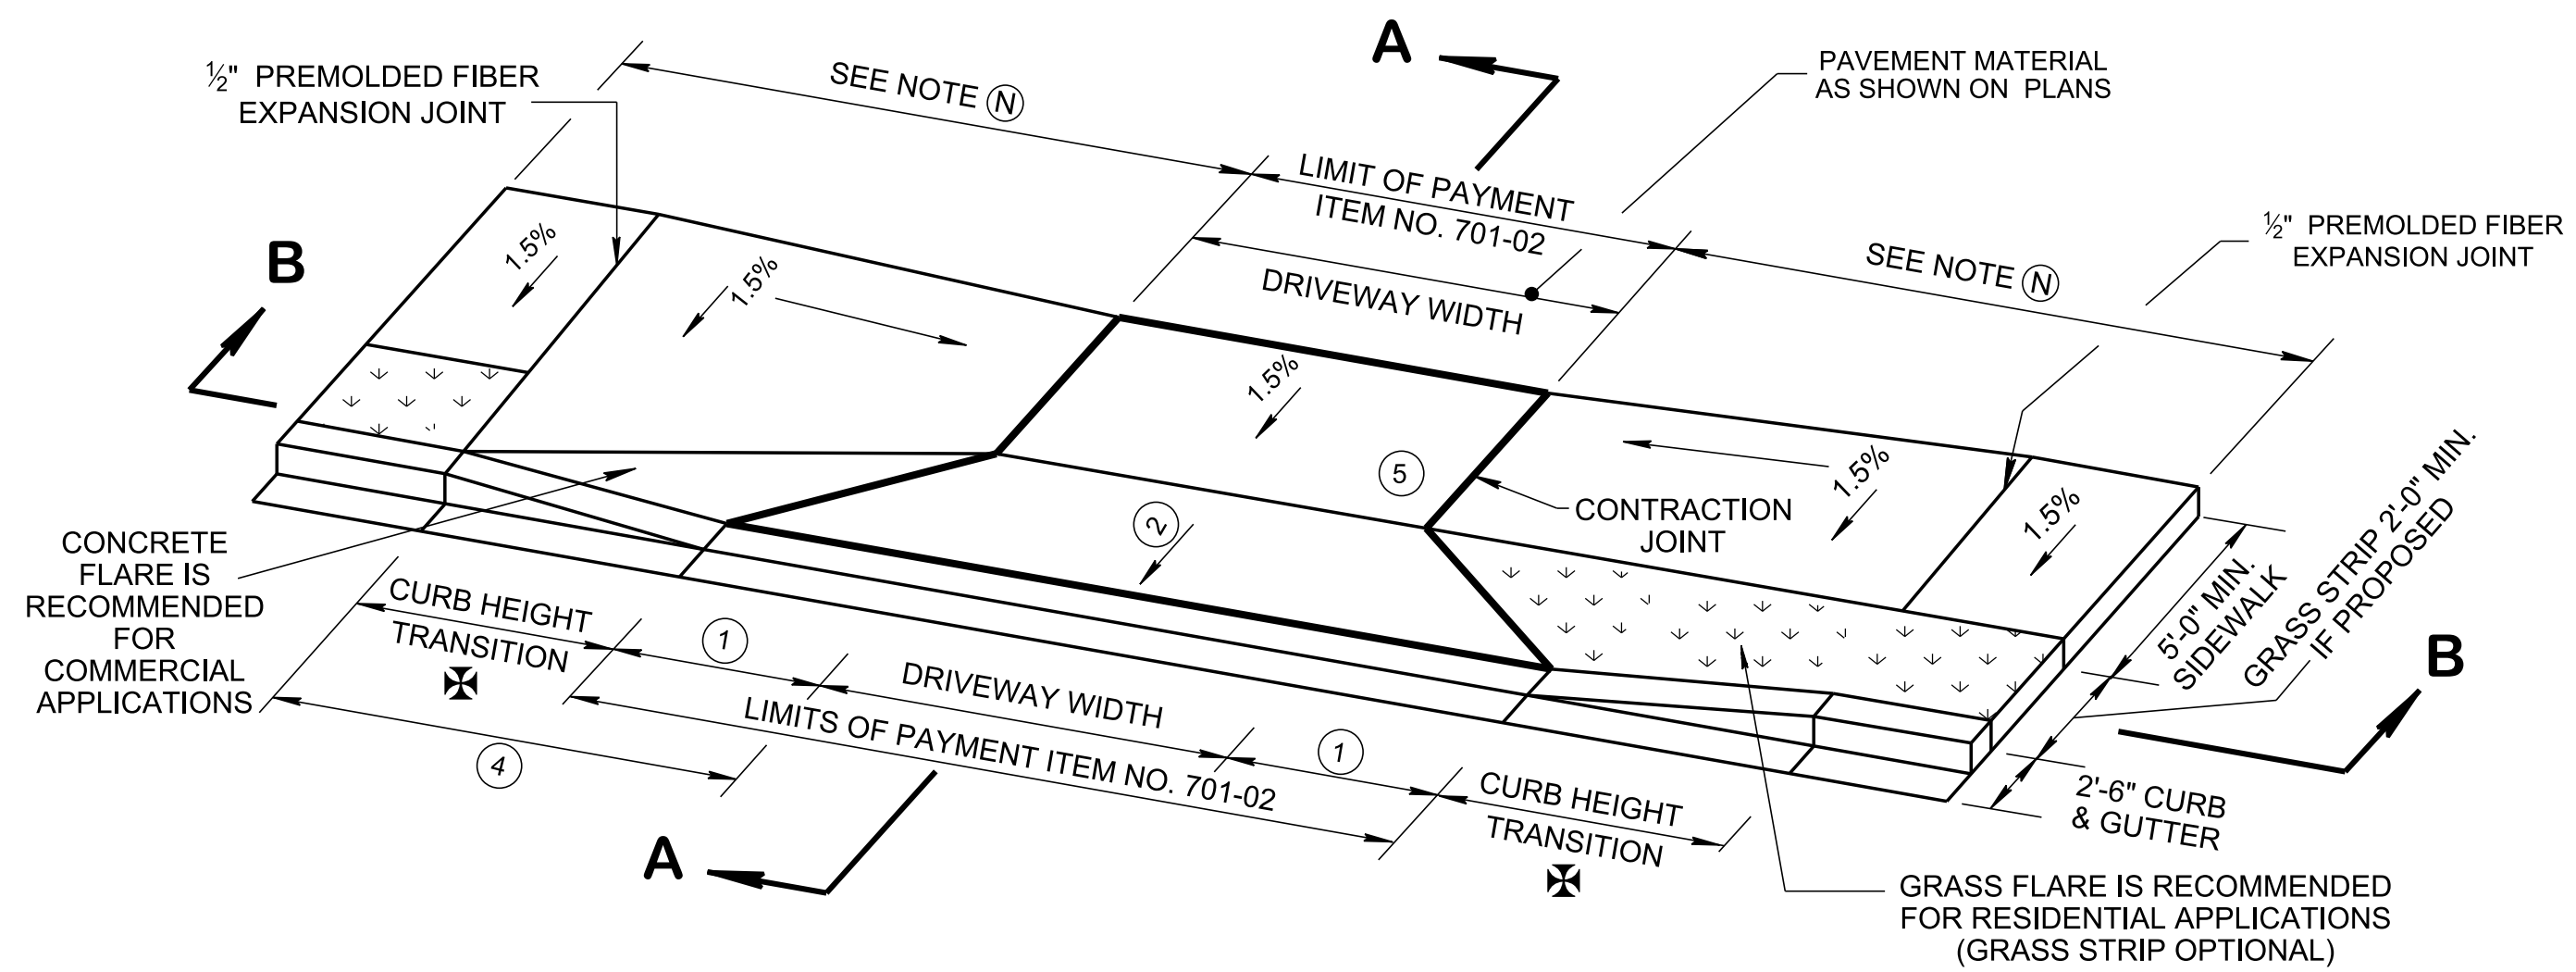


TYPE "B" DRIVEWAY ACROSS LOWERED SIDEWALK (WITH GRASS STRIP)

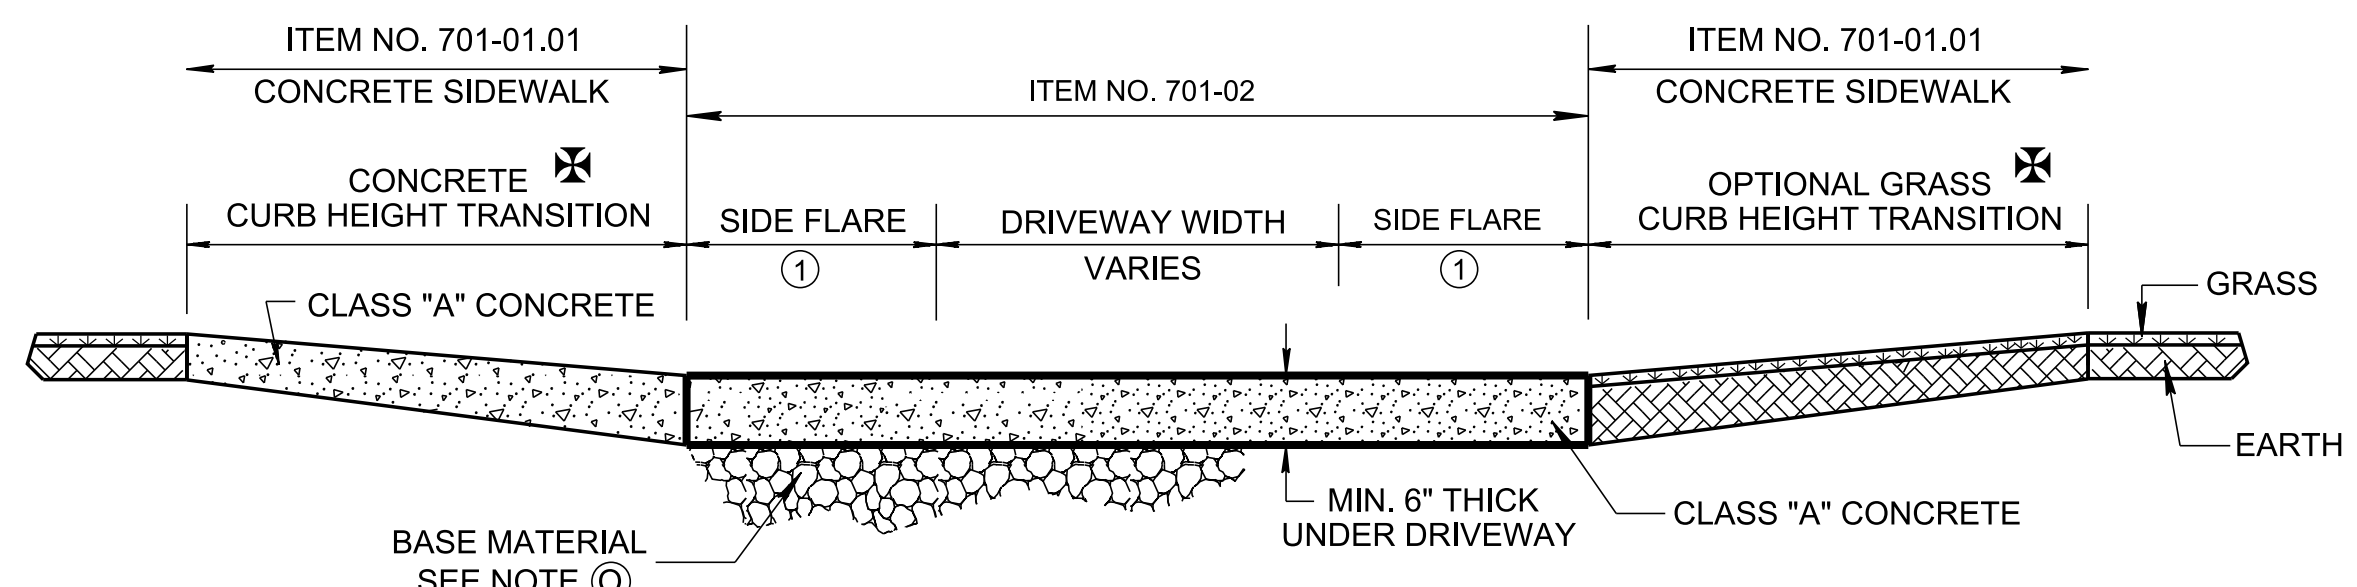


SECTION B-B

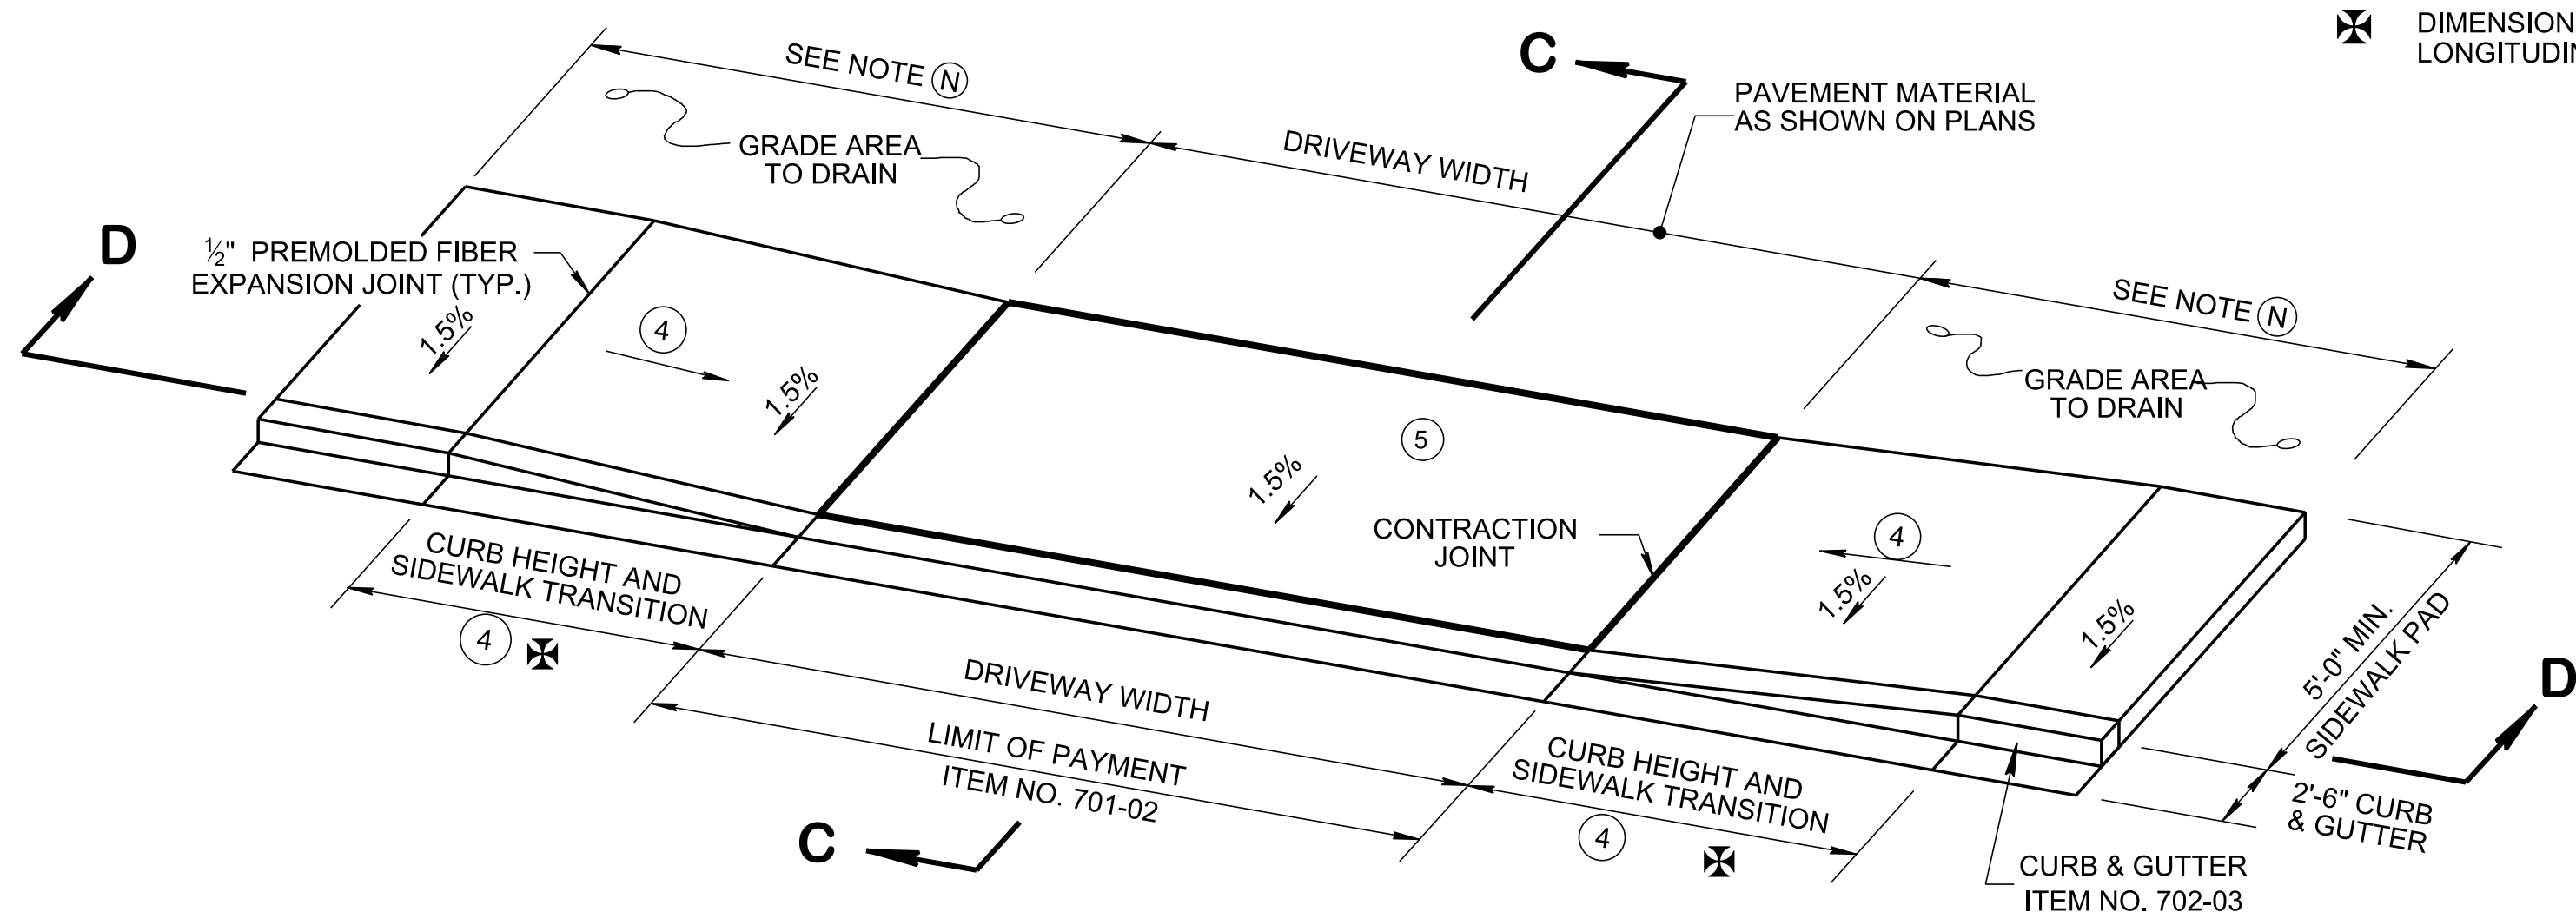


TYPE "C" DRIVEWAY ACROSS LOWERED SIDEWALK

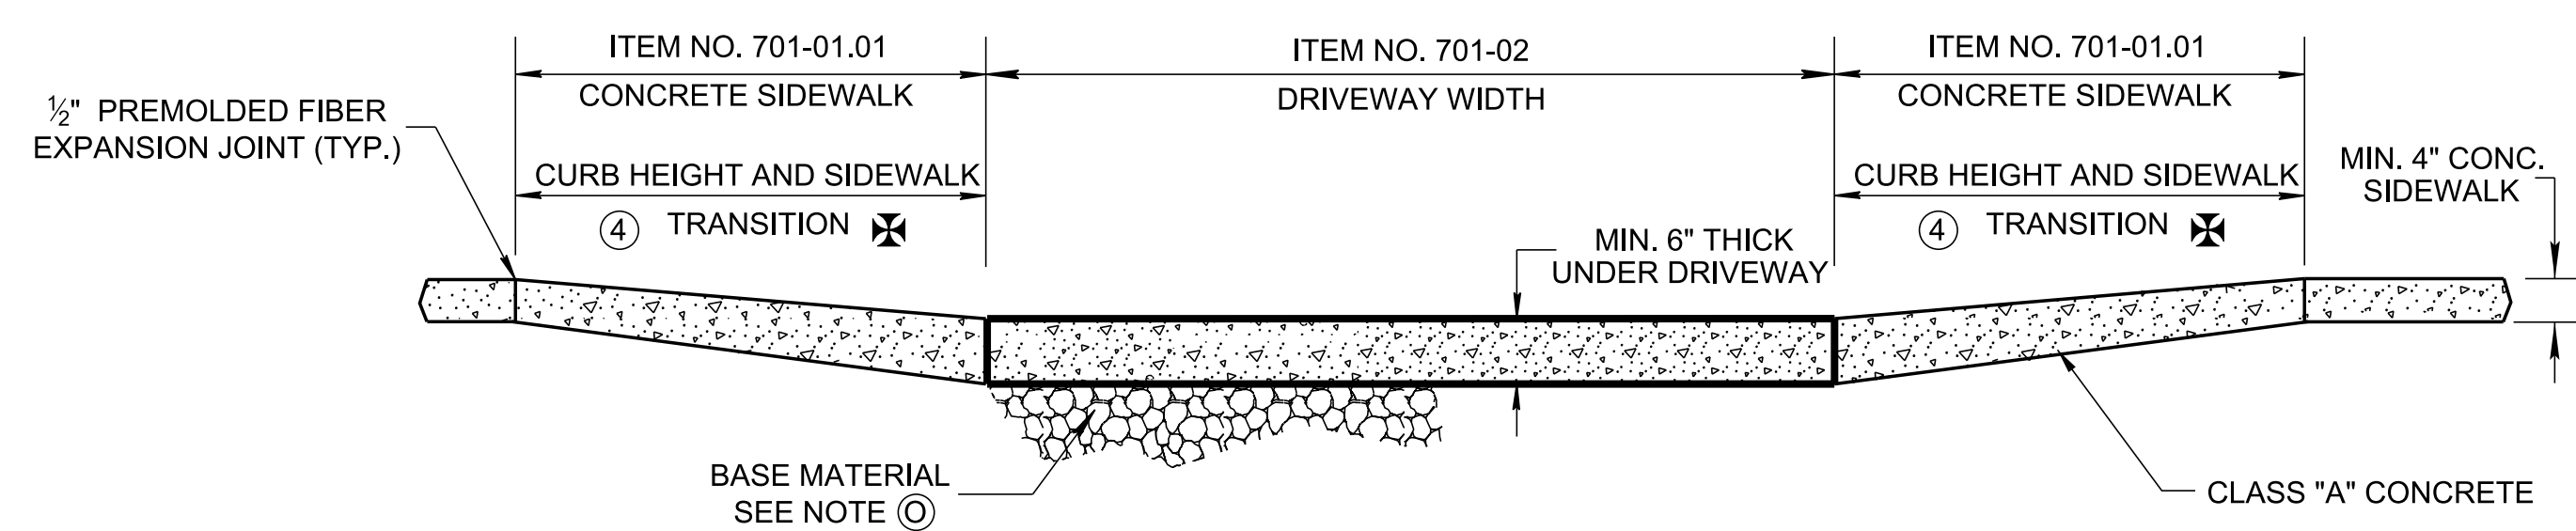

SECTION D-D

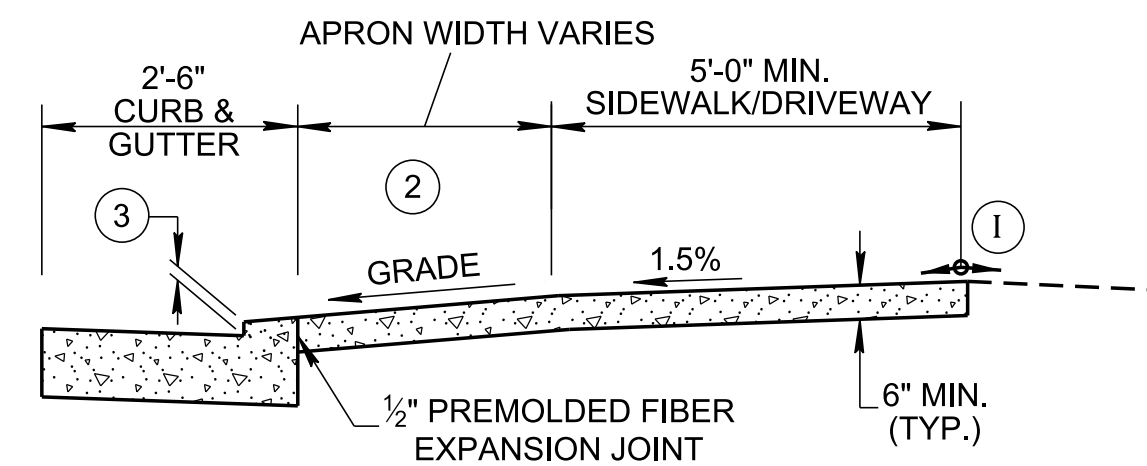

SECTION A-A

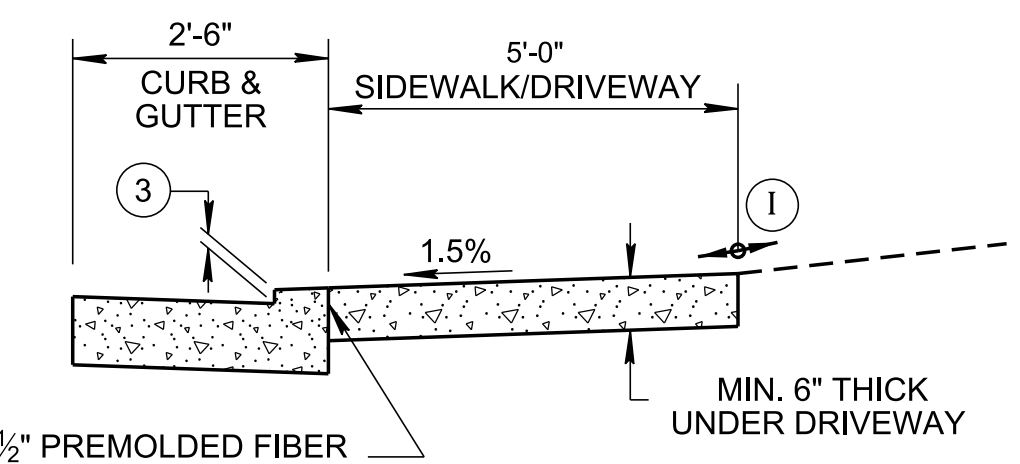

SECTION C-C

LEGEND
 ✕ DIMENSION VARIES RELATIVE TO LONGITUDINAL ROADWAY GRADE.

FOOTNOTES

- ① SIDE FLARE WIDTH SHOULD BE A MINIMUM 7'-0" FOR COMMERCIAL DRIVEWAYS. SIDE FLARE WIDTH SHOULD BE A MINIMUM 3'-6" FOR RESIDENTIAL DRIVEWAYS.
- ② DRIVEWAY RAMP GRADE VARIES, 15% MAX. (10% RECOMMENDED) APRON GRADE FOR RESIDENTIAL DRIVEWAYS. 8% MAX. (5% RECOMMENDED) APRON GRADE FOR COMMERCIAL DRIVEWAYS.
- ③ HEIGHT OF LOWERED CURB SHALL BE 2.25 INCHES. SEE STD DWG RP-VC-10 & RP-VC-11.
- ④ THE SLOPE OF THE SIDEWALK AND/OR CURB HEIGHT TRANSITION VARIES TO A MAXIMUM OF 8.33% LENGTH OF TRANSITION IS RELATIVE TO THE LONGITUDINAL ROADWAY GRADE.
- ⑤ COMMERCIAL DRIVEWAY ENTRANCE TYPICALLY (MAX. 40' WIDE) MAY REQUIRE DETECTABLE WARNING SURFACES IF ENTRANCE SERVES MORE THAN 400 VEHICLES PER DAY. SEE STD. DWG. NOS. MM-CR- SERIES FOR DETAILS.
- ⑥ 3R PROJECTS MAY REQUIRE SLOPE CORRECTION, PARALLEL CROSS-WALK MARKINGS (ESPECIALLY AT TWO WAY DRIVEWAY ENTRANCES), AND DETECTABLE DOME SURFACE TO MAINTAIN CONTINUITY AT COMMERCIAL DRIVE ENTRANCES. ADDITIONAL SIGNS (WATCH FOR PED) MAY BE ADDED AT DRIVEWAYS BY THE DIRECTION OF AN ENGINEER IF NEEDED.

GENERAL NOTES

- (A) DUE TO THE ELEVATION CHANGE FOR PEDESTRIANS ON THE SIDEWALK, THIS APPLICATION IS UNDESIRABLE AND IS TO BE USED IN LIMITED APPLICATIONS. SEE RP-D-15 FOR THE PREFERRED DRIVEWAY TYPE.
- (B) 5'-0" MINIMUM SIDEWALK WITH A MAXIMUM CROSS SLOPE OF 1.5% THROUGH DRIVEWAYS.
- (C) DESIGNER TO CHECK GUTTER FLOW DEPTH AT DRIVEWAY LOCATIONS TO ASSURE THAT THE DESIGN FLOW DOES NOT OVERTOP THE SIDEWALK AREA. IF OVERTOPPING OCCURS, PLACE AN INLET AT THE UPSTREAM SIDE OF THE DRIVEWAY OR PERFORM OTHER DESIGN MITIGATION
- (D) THE SLOPE OF THE LANDING AREA SHALL NOT EXCEED 1.5% IN THE SIDEWALK AREA.
- (E) DRIVEWAYS TO BE BUILT COMPLETE OR IN PART AS INDICATED ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
- (F) ALL CONCRETE DRIVEWAYS TO BE 6" UNIFORM THICKNESS, UNLESS OTHERWISE SHOWN ON PLANS.
- (G) EXPANSION JOINTS TO BE PLACED AS INDICATED ON THE PLANS EXCEPT JOINT AT BACK OF DRIVEWAY WHICH WILL BE PLACED WHEN DRIVEWAY ABUTS A RIGID DRIVEWAY OR BUILDING.
- (H) THE ROADWAY DESIGNER SHALL CONSIDER THE USE OF A CATCH BASIN ON EITHER SIDE OF DRIVEWAY. CAREFUL CONSIDERATION TO THE PLACEMENT OF CATCH BASINS SHALL BE TAKEN IF THE DRIVEWAY IS IN A VERTICAL SAG CURVE.
- (I) ALGEBRAIC DIFFERENCE NOT TO EXCEED 10.0%.
- (J) PAY ITEMS:

ITEM NO: 303-01,	MINERAL AGGREGATE, TYPE A BASE, GRADING D,	PER TON.,
ITEM NO: 701-01.01,	CONCRETE SIDEWALK (4"),	S.F.,
ITEM NO: 701-02,	CONCRETE DRIVEWAY,	S.F.,
ITEM NO: 702-03,	CONCRETE COMBINED CURB & GUTTER,	C.Y.
- (K) WHEN MORE THAN 2 DRIVEWAYS ARE PROPOSED, USE TYPE "A" DRIVEWAY AS SHOWN ON STANDARD DRAWING RP-D-15 TO REDUCE ROLLER COASTER EFFECT FOR PEDESTRIANS.
- (L) TYPICAL DRIVEWAY WIDTHS ARE 12' (14' TWO WAY) FOR RESIDENTIAL AND 24' (40' MAX.) FOR COMMERCIAL.
- (M) REFER TO SECTION 5.1.3. IN THE MANUAL FOR CONSTRUCTING DRIVEWAY ENTRANCES ON STATE HIGHWAYS (2015) FOR RADIUS OF CURVATURE GUIDANCE.
- (N) ALL SIDEWALKS SHALL HAVE A MINIMUM CONCRETE THICKNESS OF 4".
- (O) 4 INCH AGGREGATE BASE MATERIAL SHALL BE INSTALLED UNDER NEW CONCRETE DRIVEWAYS.

REV. 7-15-08: UPDATED SIDEWALK DIMENSIONS.
 REV. 4-8-16: ADDED ITEM NUMBERS, UPDATED SLOPES AND DIMENSIONS, UPDATED NOTES.
 REV. 07-16-18: ADDED NOTES TO CONC. FLARE AND GRASS FLARE IN ISOMETRIC VIEW. ADDED GENERAL NOTE (M) & (N).
 REV. 01-07-19: ADDED LIMITS FOR ITEM NO. 701-02. ADJUSTED LOCATION OF GENERAL NOTE NOS. (1) & (N) ON DETAILS. REDREW SHEET.
 REV. 10-16-20: ADDED GENERAL NOTE (O) MINERAL AGGREGATE ITEM NUMBER AND BASE MATERIAL ON SECTIONS B-B AND D-D.

APPROVED BY FHWA
 (ALL OTHERS APPROVED BY TDOT)

STATE OF TENNESSEE
 STANDARD DRAWING
 DEPARTMENT OF TRANSPORTATION

DETAILS OF LOWERED STANDARD CONCRETE DRIVEWAYS