



TOWN OF COLLIERVILLE
FINANCE DEPARTMENT
Procurement Division
MEMORANDUM



TO: ALL TC2025-41 PLAN HOLDERS
FROM: TERRI SPEARS
SUBJECT: ADDENDUM #1
DATE: 7/3/2025
CC: TC2025-41 RESURFACING OF VARIOUS STREETS_PIN 130195.00 FILE

ADDENDUM NO. 1

BID OPENING DATE CHANGE:

The Bid Opening for the above-named project has been **rescheduled for WEDNESDAY, JULY 16, 2025 at 2:00:00 p.m.** at 500 Poplar View Parkway, Collierville, TN 38017.

All Bid Responses will be time-stamped and signed upon acceptance. Bid Responses not in hand by the above stated date and time will not be considered. The Town is not responsible for delays occasioned by the U.S. Postal Service or any other means of delivery employed by the bidder. Similarly, the Town is not responsible for, and will not open, any bid responses that are received later than the above state date and time.

The following additions, deletions, and/or revisions shall be made part of the Plans dated **May 6, 2025** for the referenced project. This addendum shall have precedence over the plans and specifications on all items listed and described herein; however, it shall not change the intent and requirement of the plans and specifications for any item not specifically mentioned.

ITEM NO. 1

Question: TDOT includes a pavement removal item 202-03.01 to be paid for as patching removal. Can this be added as a bid item?

Answer: Pay Item 202-03.01 has been added to the project for breakout areas. See revised Bid Tab and Sheet No. 2.

ITEM NO. 2

Item number 203-03.01 Borrow Excavation (Select Material) C.Y. has been added to the project. See revised Bid Tab and Sheet No. 2.

ITEM NO. 3

Item number 203-05 Undercutting C.Y. has been revised and Footnote 5 has been added. See revised Bid Tab and Sheet No. 2.

ITEM NO. 4

All interested and TDOT pre-qualified contractors must submit the revised Bid Tab dated 7/3/2025 attached to this addendum and the “Addenda Acknowledgement Form at the bottom of the revised Bid Tabulation Form.

Bidder shall acknowledge receipt of Addendum #1 consisting of 7 pages by signing and dating below. Please return via email to tocpurchasing@collierville.tn.gov or via fax to (901) 457-2258.

Company Name

Date

PIN 130195.00 - RESURFACING VARIOUS STREETS BID FORM 7/3/2025

ITEM NO.	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	COST
105-01	CONSTRUCTION STAKES, LINES AND GRADES	LS	1		
201-01	CLEARING AND GRUBBING	LS	1		
202-01.13	REMOVAL OF PIPE (18" RCP, 162+72)	L.F.	36		
202-01.14	REMOVAL OF PIPE (24" RCP, 164+68)	L.F.	48		
202-03	REMOVAL OF RIGID PAVEMENT, SIDEWALK, ETC.	S.Y.	150		
202-03.01	REMOVAL OF ASPHALT PAVEMENT	S.Y.	1791		
202-08.15	REMOVAL OF CURB AND GUTTER	L.F.	500		
203-01	ROAD & DRAINAGE EXCAVATION (UNCLASSIFIED)	C.Y.	608		
203-03	BORROW EXCAVATION (UNCLASSIFIED)	C.Y.	501		
203-03.01	BORROW EXCAVATION (SELECT MATERIAL)	C.Y.	100		
203-04	PLACING & SPREADING TOPSOIL	C.Y.	33		
203-05	UNDERCUTTING	C.Y.	100		
203-06	WATER	M.G.	2		
209-03.21	FILTER SOCK (12 INCH)	L.F.	415		
209-05	SEDIMENT REMOVAL	C.Y.	30		
209-08.03	TEMPORARY SILT FENCE (WITHOUT BACKING)	L.F.	150		
209-09.43	CRUB INLET PROTECTION (TYPE 4)	EACH	7		
303-01	MINERAL AGGREGATE, TYPE A BASE, GRADING D	TON	1532		
307-01.01	ASPHALTIC CONCRETE MIX (PG64-22)(BPMB-HM) GRADING A	TON	344		
403-01	BITUMINOUS MATERIAL FOR TACK COAT (TC)	TON	22		
407-20.05	SAW CUTTING ASPHALT PAVEMENT	L.F.	2650		
411-01.10	ACS MIX (PG64-22) GRADING D	TON	2472		
411-02.10	ACS MIX (PG70-22) GRADING D	TON	867		
415-01.01	COLD PLANING BITUMINOUS PAVEMENT	TON	2964		
607-03.02	18" CONCRETE PIPE CULVERT (CLASS III)	L.F.	376		
607-05.02	24" CONCRETE PIPE CULVERT (CLASS III)	L.F.	36		
611-02.12	JUNCTION BOX, TYPE 3	EACH	1		
611-07.32	24IN ENDWALL (SIDE DRAIN)	EACH	2		
611-12.01	CATCH BASIN, TYPE 12, > 0' - 4' DEPTH	EACH	1		
611-12.02	CATCH BASIN, TYPE 12, > 4' - 8' DEPTH	EACH	1		

PIN 130195.00 - RESURFACING VARIOUS STREETS BID FORM 7/3/2025

ITEM NO.	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	COST
701-01.01	CONCRETE SIDEWALK (4")	S.F.	1200		
701-02.01	CONCRETE CURB RAMP (RETROFIT)	S.F.	1530		
701-02.03	CONCRETE CURB RAMP	S.F.	600		
701-02.06	DETECTABLE WARNING SURFACE (REHABILITATION)	S.F.	64		
702-01	CONCRETE CURB	C.Y.	20		
702-03	CONCRETE COMBINED CURB & GUTTER	C.Y.	10		
712-01	TRAFFIC CONTROL	LS	1		
712-04.01	FLEXIBLE DRUMS (CHANNELIZING)	EACH	350		
712-05.03	WARNING LIGHTS (TYPE A)	EACH	65		
712-06	SIGNS (CONSTRUCTION)	S.F.	508		
712-08.03	ARROW BOARD (TYPE C)	EACH	5		
713-02.21	SIGN POST DELINEATION ENHANCEMENT	L.F.	12		
713-13.02	FLAT SHEET ALUMINUM SIGNS (0.080" THICK)	S.F.	16		
713-15.02	REMOVAL & RELOCATION OF SIGN & SUPPORT	EACH	2		
713-16.01	CHANGEABLE MESSAGE SIGN UNIT	EACH	3		
716-01.21	SNOWPLOWABLE RAISED PAVEMENT MARKERS (BI-DIR) (1 COLOR)	EACH	111		
716-01.22	SNOWPLOWABLE RAISED PAVEMENT MARKERS (Mono- DIR) (1 COLOR)	EACH	232		
716-01.30	REMOVAL OF SNOWPLOWABLE REFLECTIVE MARKER	EACH	50		
716-02.03	PLASTIC PAVEMENT MARKING (CROSS-WALK)	L.F.	500		
716-02.05	PLASTIC PAVEMENT MARKING (STOP LINE)	L.F.	456		
716-02.06	PLASTIC PAVEMENT MARKING (TURN LANE ARROW)	EACH	18		
716-02.09	PLASTIC PAVEMENT MARKING (LONGITUDINAL CROSS- WALK)	L.F.	1276		
716-02.12	PLASTIC PAVEMENT MARKING (8IN LINE)	L.M.	0.7		
716-03.01	PLASTIC WORD PAVEMENT MARKING (ONLY)	EACH	8		
716-03.02	PLASTIC WORD PAVEMENT MARKING (RXR)	EACH	3		
716-04.01	PLASTIC PAVEMENT MARKING (STRAIGHT-TURN ARROW)	EACH	3		
716-04.05	PLASTIC PAVEMENT MARKING (STRAIGHT ARROW)	EACH	4		
716-13.02	SPRAY THERMO PVMT MRKNG (60MIL) (6IN LINE)	L.M.	4		
717-01	MOBILIZATION	LS	1		

PIN 130195.00 - RESURFACING VARIOUS STREETS BID FORM 7/3/2025

ITEM NO.	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	COST
801-03	WATER (SEEDING & SODDING)	M.G.	2		
803-01	SODDING (NEW SOD)	S.Y.	200		
TOTAL BID AMOUNT =					

Total Bid Amount in Words:

Contractor:

Phone:

Authorized Representative:

Print Name:

7/3/2025 11:05:41 AM
Z:\TOWN\COLL\1009\TR Transportation\130195.00 - Estimated Quantities.sht

ESTIMATED ROADWAY QUANTITIES					
	ITEM NO.	DESCRIPTION	UNIT	QUANTITY	
(5)	105-01	CONSTRUCTION STAKES, LINES AND GRADES	LS	1	
	201-01	CLEARING AND GRUBBING	LS	1	
	202-01.13	REMOVAL OF PIPE (18" RCP, 162+72)	L.F.	36	
	202-01.14	REMOVAL OF PIPE (24" RCP, 164+68)	L.F.	48	
	202-03	REMOVAL OF RIGID PAVEMENT, SIDEWALK, ETC.	S.Y.	150	
	202-03.01	REMOVAL OF ASPHALT PAVEMENT	S.Y.	1791	
	202-08.15	REMOVAL OF CURB AND GUTTER (6-30)	L.F.	500	
	203-01	ROAD & DRAINAGE EXCAVATION (UNCLASSIFIED)	C.Y.	608	
	203-03	BORROW EXCAVATION (UNCLASSIFIED)	C.Y.	501	
	203-03.01	BORROW EXCAVATION (SELECT MATERIAL)	C.Y.	100	
	203-04	PLACING & SPREADING TOPSOIL	C.Y.	33	
	203-05	UNDERCUTTING	C.Y.	100	
	203-06	WATER	M.G.	2	
	1)	209-03.21	FILTER SOCK (12 INCH)	L.F.	415
	1)	209-05	SEDIMENT REMOVAL	C.Y.	30
1)	209-08.03	TEMPORARY SILT FENCE (WITHOUT BACKING)	L.F.	150	
1)	209-09.43	CURB INLET PROTECTION (TYPE 4)	EACH	7	
3)	303-01	MINERAL AGGREGATE, TYPE A BASE, GRADING D	TON	1532	
	307-01.01	ASPHALTIC CONCRETE MIX (PG64-22)(BPMB-HM) GRADING A	TON	344	
	403-01	BITUMINOUS MATERIAL FOR TACK COAT (TC)	TON	22	
	407-20.05	SAW CUTTING ASPHALT PAVEMENT	L.F.	2650	
	411-01.10	ACS MIX (PG64-22) GRADING D	TON	2472	
	411-02.10	ACS MIX (PG70-22) GRADING D	TON	867	
	415-01.01	COLD PLANING BITUMINOUS PAVEMENT	TON	2964	
	607-03.02	18" CONCRETE PIPE CULVERT (CLASS III)	L.F.	376	
	607-05.02	24" CONCRETE PIPE CULVERT (CLASS III)	L.F.	36	
	611-02.12	JUNCTION BOX, TYPE 3	EACH	1	
	611-07.32	24IN ENDWALL (SIDE DRAIN)	EACH	2	
	611-12.01	CATCH BASIN, TYPE 12, > 0' - 4' DEPTH	EACH	1	
	611-12.02	CATCH BASIN, TYPE 12, > 4' - 8' DEPTH	EACH	1	
2)	701-01.01	CONCRETE SIDEWALK (4")	S.F.	1200	
	701-02.01	CONCRETE CURB RAMP (RETROFIT)	S.F.	1530	
	701-02.03	CONCRETE CURB RAMP	S.F.	600	
	701-02.06	DETECTABLE WARNING SURFACE (REHABILITATION)	S.F.	64	
	702-01	CONCRETE CURB	C.Y.	20	
	702-03	CONCRETE COMBINED CURB & GUTTER	C.Y.	10	
	712-01	TRAFFIC CONTROL	LS	1	
	712-04.01	FLEXIBLE DRUMS (CHANNELIZING)	EACH	350	
	712-05.03	WARNING LIGHTS (TYPE C)	EACH	65	
	712-06	SIGNS (CONSTRUCTION)	S.F.	508	
	712-08.03	ARROW BOARD (TYPE C)	EACH	5	
	713-02.21	SIGN POST DELINEATION ENHANCEMENT	L.F.	12	
	713-13.02	FLAT SHEET ALUMINUM SIGNS (0.080" THICK)	S.F.	16	
	713-15.02	REMOVAL & RELOCATION OF SIGN & SUPPORT	EACH	2	
	713-16.01	CHANGEABLE MESSAGE SIGN UNIT	EACH	3	
2)	716-01.21	SNOWPLOWABLE RAISED PAVEMENT MARKERS (BI-DIR) (1 COLOR)	EACH	111	
	716-01.22	SNOWPLOWABLE RAISED PAVEMENT MARKERS (Mono-DIR) (1 COLOR)	EACH	232	
	716-01.30	REMOVAL OF SNOWPLOWABLE REFLECTIVE MARKER	EACH	50	
	716-02.03	PLASTIC PAVEMENT MARKING (CROSS-WALK)	L.F.	500	
	716-02.05	PLASTIC PAVEMENT MARKING (STOP LINE)	L.F.	456	
	716-02.06	PLASTIC PAVEMENT MARKING (TURN LANE ARROW)	EACH	18	
	716-02.09	PLASTIC PAVEMENT MARKING (LONGITUDINAL CROSS-WALK)	L.F.	1276	
	716-02.12	PLASTIC PAVEMENT MARKING (8IN LINE)	L.M.	0.7	
	716-03.01	PLASTIC WORD PAVEMENT MARKING (ONLY)	EACH	8	


	ESTIMATED ROADWAY QUANTITIES			
	ITEM NO.	DESCRIPTION	UNIT	QUANTITY
2)	716-03.02	PLASTIC WORD PAVEMENT MARKING (RXR)	EACH	3
2)	716-04.01	PLASTIC PAVEMENT MARKING (STRAIGHT-TURN ARROW)	EACH	3
2)	716-04.05	PLASTIC PAVEMENT MARKING (STRAIGHT ARROW)	EACH	4
	716-13.02	SPRAY THERMO PVMT MRKNG (60MIL) (6IN LINE)	L.M.	4
	717-01	MOBILIZATION	LS	1
(4)	801-03	WATER (SEEDING & SODDING)	M.G.	2
	803-01	SODDING (NEW SOD)	S.Y.	200

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2025	STP-M-9417(15)	2

REVISIONS:
DATE: 7/3/2025
ADDED PAY ITEMS 202-03.01 AND 203-03.01.
ADDED FOOTNOTE 5. REVISED ITEM
NUMBER 203-05.

FOOTNOTES	
(1)	ALL EROSION PREVENTION AND SEDIMENT CONTROL QUANTITIES ARE TO BE USED AS DIRECTED BY THE ENGINEER. SEE SUBSECTION 209.07 OF THE STANDARD SPECIFICATIONS FOR MAINTENANCE REPLACEMENT.
(2)	CONTRACTOR MAY ELECT TO SUBSTITUTE PREFORMED PLASTIC FOR THERMOPLASTIC. PREFORMED PLASTIC SHALL BE PAID FOR AT THE SAME UNIT PRICE AS BID FOR THERMOPLASTIC.
(3)	BEDDING MATERIAL SHALL BE INCLUDED IN THE COST OF THE PROPOSED PIPE CULVERT. SEE STANDARD DRAWING NO. D-PB-1 FOR ADDITIONAL DETAILS.
(4)	INCLUDES 2 THOUSAND GALLONS FOR EROSION PREVENTION AND SEDIMENT CONTROL.
(5)	ITEM TO BE USED AS DIRECTED BY THE ENGINEER.

SEALED BY

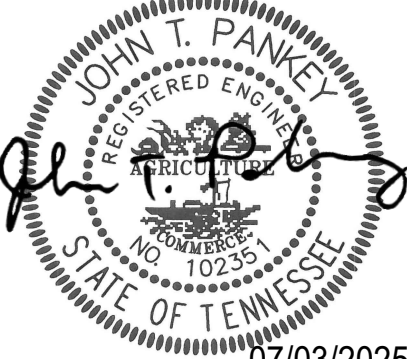

TOWN OF COLLIERVILLE

ESTIMATED
ROADWAY
QUANTITIES

Project Number: PIN 130195.00

Addendum No. 1 _____ Date _____

By: _____

Title: _____