
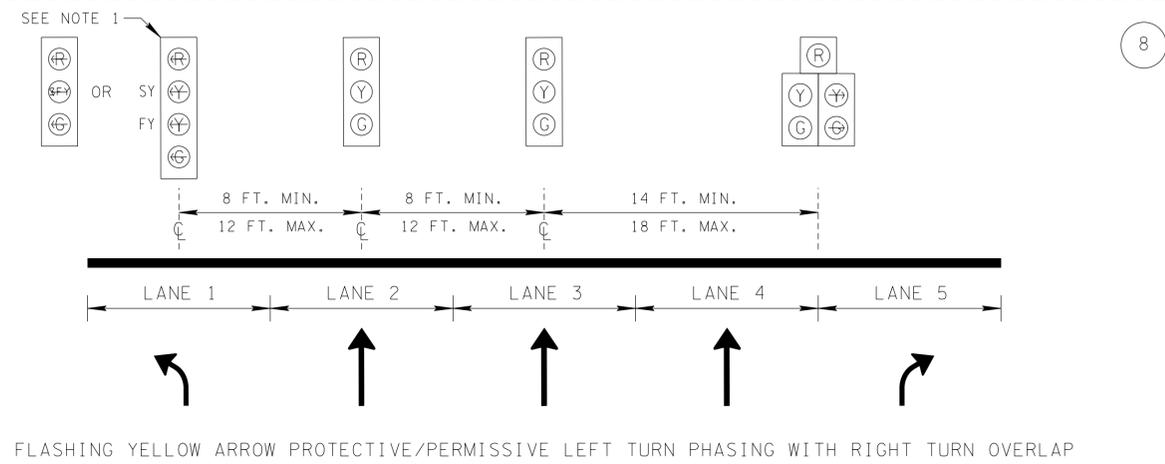
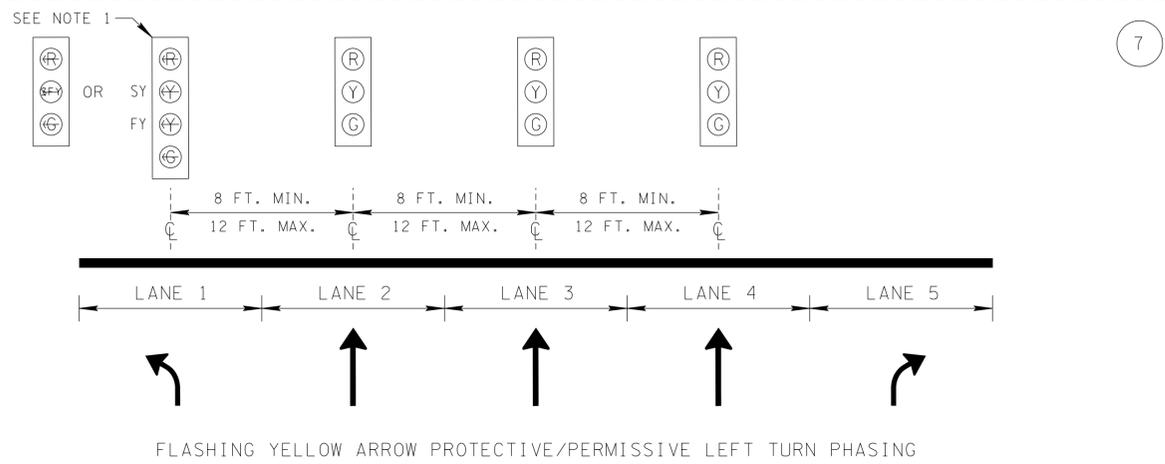
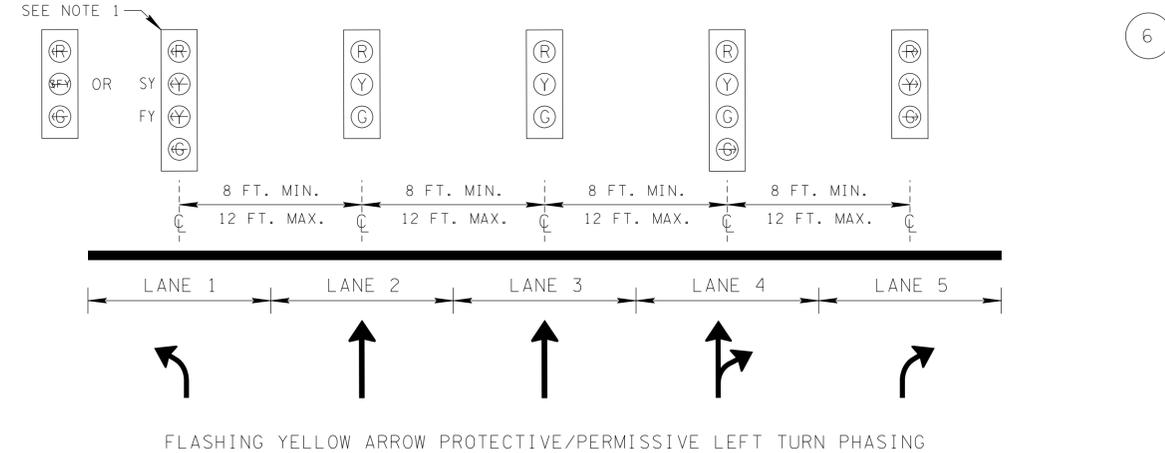
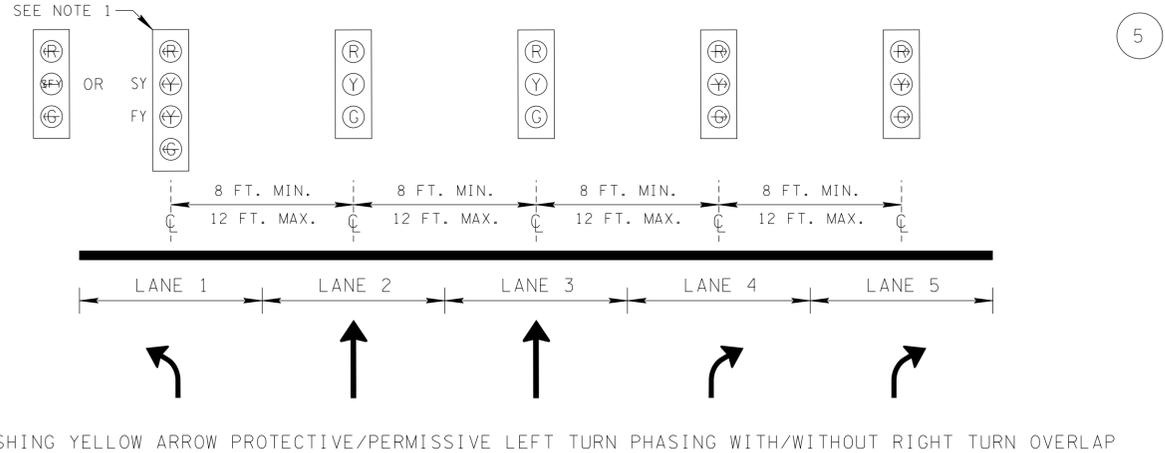
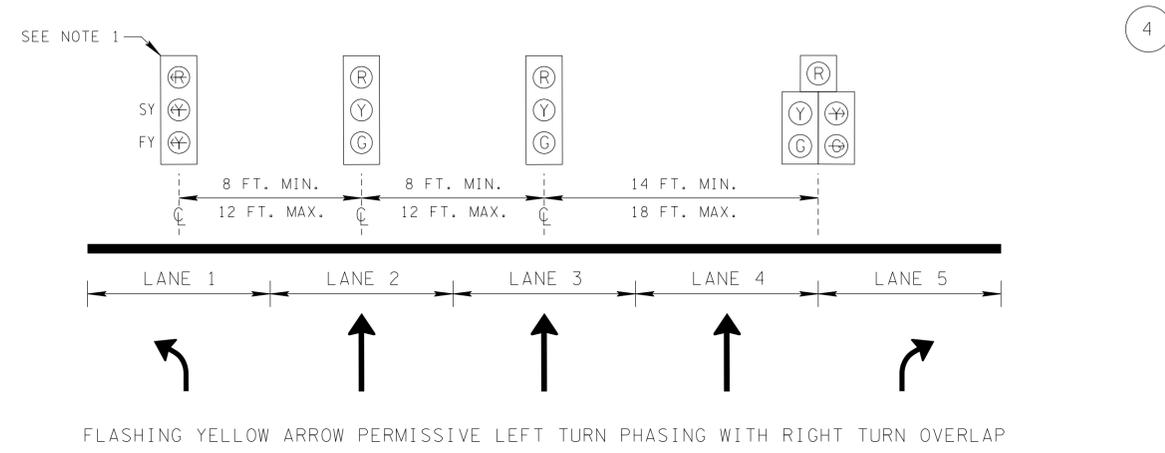
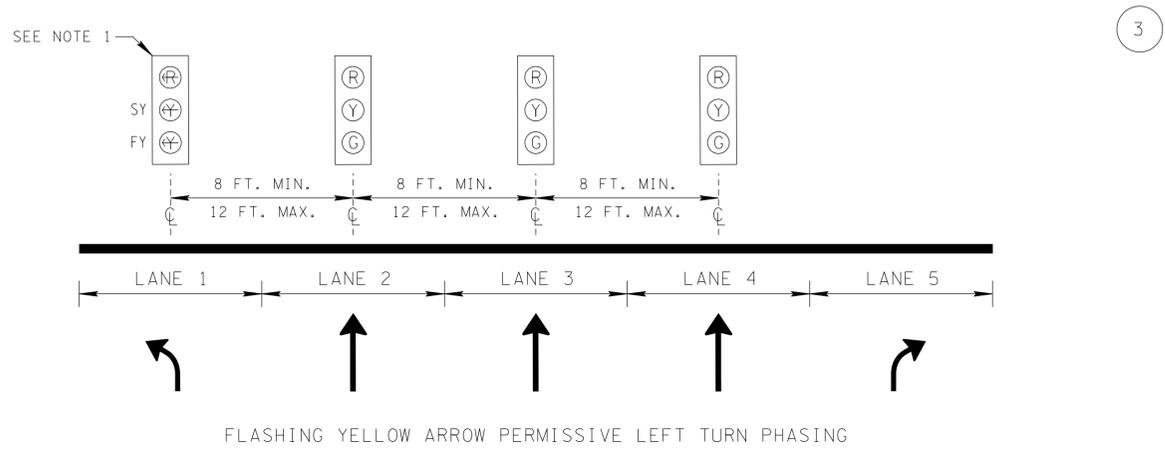
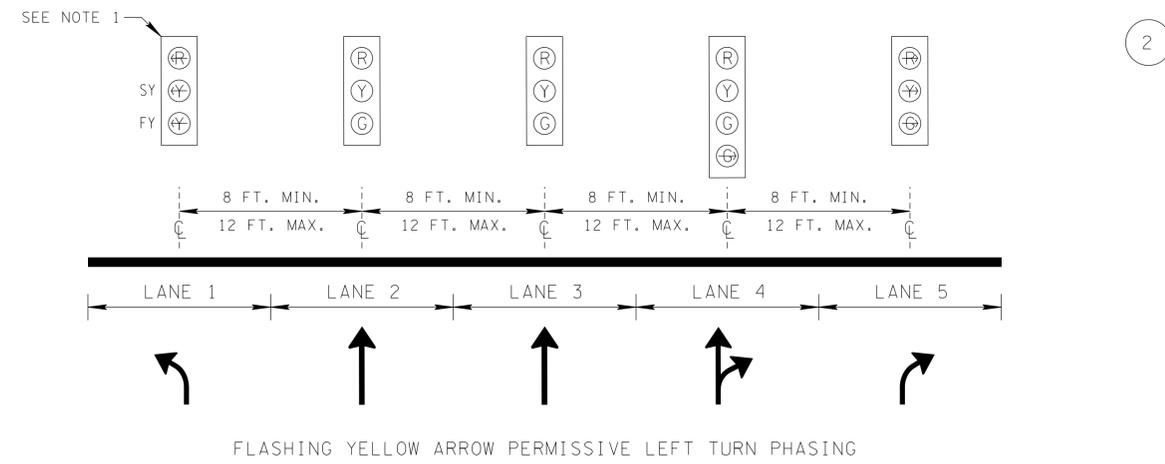


2/19/2025 1:25:21 PM
C:\Users\jll706\OneDrive - Tennessee Documents\Traffic Services\T-SC-7 Series Standard Drawings w. DGN s\TSG7A-S_11172020_Update.dgn

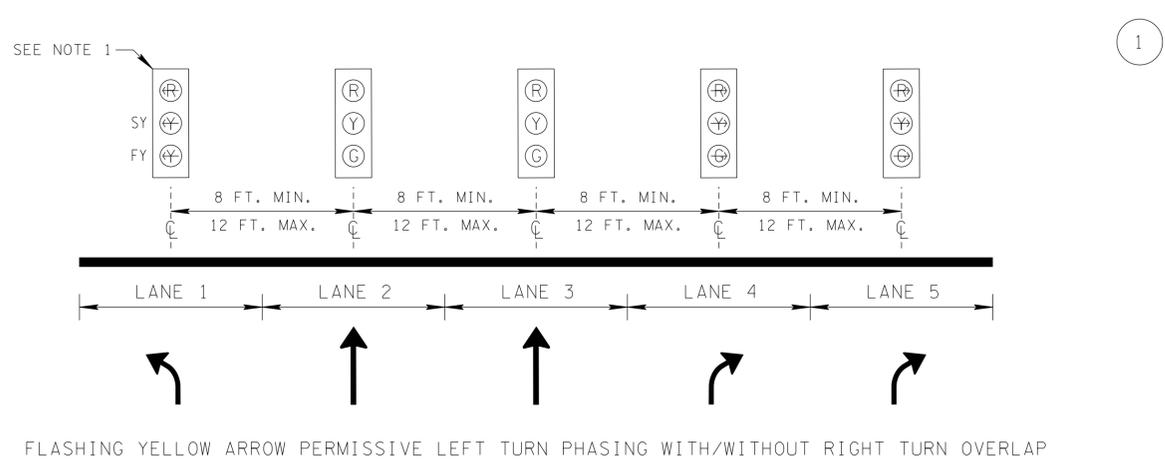

REV. 07-13-17: CHANGED SHEET NAME TO T-SC-PP. RENAMED NOTE 2 TO NOTE 3. ADDED NOTE 2 AND "SEE NOTE 2" LABELS.

REV. 12-18-25: DELETED NOTE 2 AND NOTE 2 LABELS. ADDED BLOCK NUMBERS TO SHEET.

LEGEND	
SY	= STEADY YELLOW ARROW
FY	= FLASHING YELLOW ARROW
SFY	= STEADY AND FLASHING YELLOW ARROW

NOTE 1: WHERE THERE IS AN OPPOSITE LEFT TURN LANE APPROACH IN THE SAME ALIGNMENT AS THE LEFT TURN LANE, THE LEFT TURN SIGNAL HEAD IS OFFSET TWO FEET (MIN.) CLOSER TO THE THROUGH LANE IN ORDER TO INCREASE THE APPROACH'S SIGNAL HEAD VISIBILITY.

NOTE 2: DELETED

NOTE 3: SEE THE CURRENT EDITION OF THE MUTCD FOR ADDITIONAL INFORMATION REGARDING SIGNAL HEAD PLACEMENTS.

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SIGNAL HEAD PLACEMENT
FIVE-LANE APPROACHES

6-27-16 T-SC-7PP