PROJECT NO.	YEAR	SHEET NO.
	1992	

REVISIONS

	NO.	DATE	BY	BRIEF DESCRIPTION
B/R	1	2-21-95	T.O.	REMOVED SIGNATURES
B/R	2	1-4-96	TQ	REVISED BR DRAWING NO. TO SBR DRAWING NO., AND REVISED STD AND S-GR DRAWINGS
B/R	3	11-05-01	WS	REVISED ITEM NUMBERS

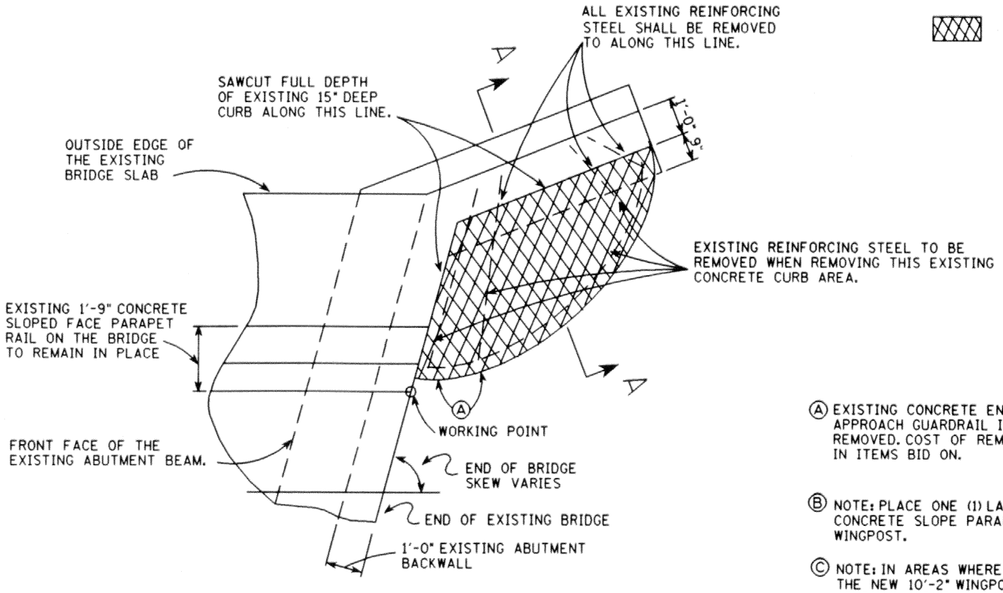

PLAN - DETAIL NO. 1

(SHOWING PORTIONS OF EXISTING CURBS AND CONCRETE ENDPOST AT BRIDGE END TO BE REMOVED WHEN PLACING NEW 10'-2" WINGPOST AT THESE LOCATIONS).

DENOTES: EXISTING CONCRETE CURB AREA TO BE REMOVED.

Ⓐ EXISTING CONCRETE ENDPOST AND EXISTING APPROACH GUARDRAIL IN THIS AREA TO BE REMOVED. COST OF REMOVAL TO BE INCLUDED IN ITEMS BID ON.

Ⓑ NOTE: PLACE ONE (1) LAYER OF FELT PAPER BETWEEN THE EXISTING CONCRETE SLOPE PARAPET RAIL AND THE NEW 10'-2" CONCRETE WINGPOST.

Ⓒ NOTE: IN AREAS WHERE THE NEW 3'-3" WIDE FOOTING FOR THE NEW 10'-2" WINGPOST CONFLICTS WITH THE EXISTING WINGWALL ABUTMENT BEAM IT WILL BE NECESSARY TO FIELD CUT THE NEW REINFORCING STEEL AND POUR THE NEW CONCRETE AROUND THE EXISTING ABUTMENT BEAM AT THESE LOCATIONS, SEE DETAILS ON STANDARD DRAWING NO. SBR-2-126.

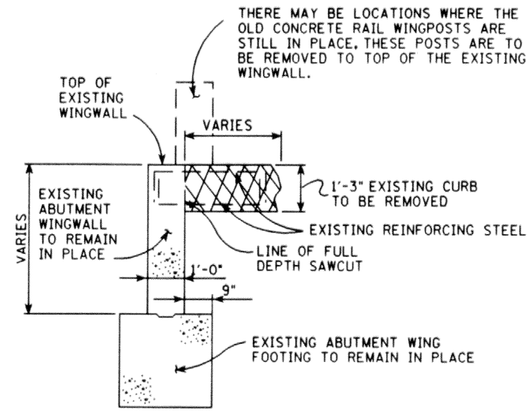

SECTION "A-A"

NOTE: COST OF ALL EXISTING CONCRETE WINGPOST, AND PORTIONS OF THE EXISTING CURBS TO BE REMOVED ARE TO BE INCLUDED IN ITEMS BID ON. ALL WORK MUST MEET WITH THE FULL APPROVAL OF THE ENGINEER.

NOTE: COST OF ALL MATERIALS AND LABOR TO BUILD THE NEW 10'-2" WINGPOST WITH FOOTING COMPLETE AND IN PLACE TO BE INCLUDED IN ITEM NO. 620-10.01, CONCRETE PARAPET (BRIDGERAIL REPLACEMENT), LIN. FOOT. FOR DETAILS AND NOTES SEE STANDARD DRAWINGS SBR-2-124, SBR-2-125 AND SBR-2-126.

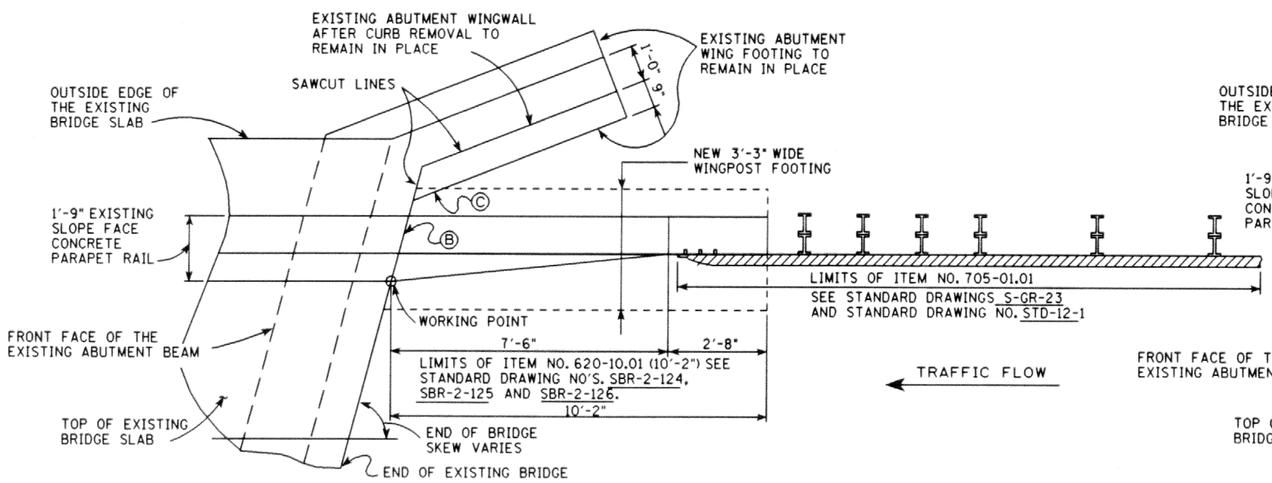

▲PLAN - DETAIL NO.2

(SHOWING LOCATION OF NEW 10'-2" ENDPOST WITH NEW 3'-3" WIDE FOOTING TO BE CONSTRUCTED AT EXISTING BRIDGE END.)

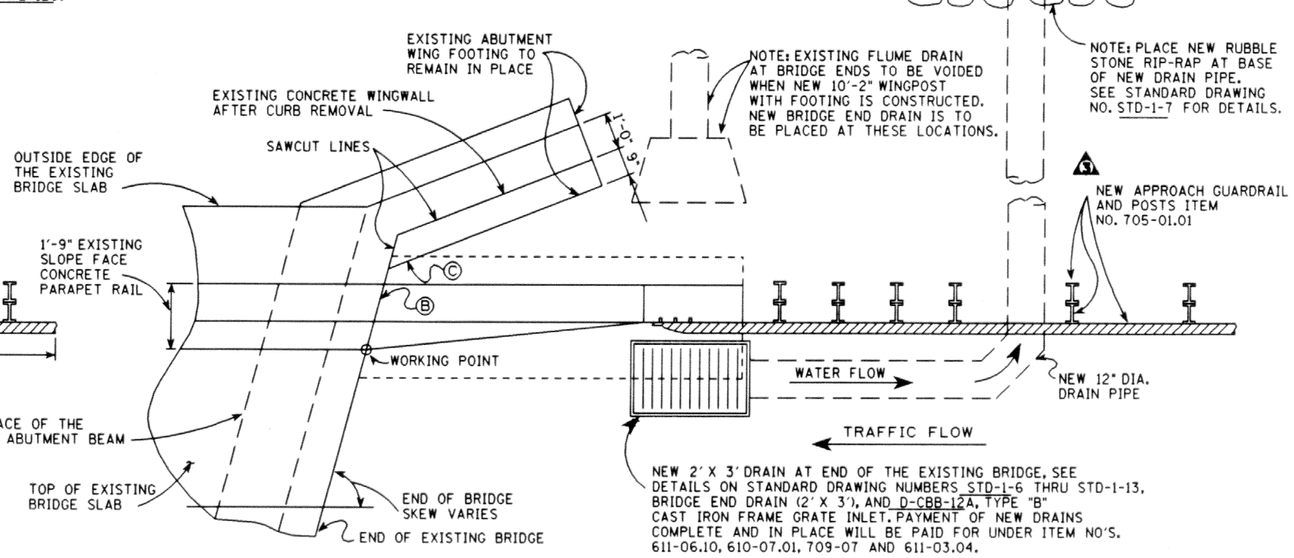

PLAN - DETAIL NO.3

(SHOWING NEW 10'-2" ENDPOST WITH NEW DRAIN AT END OF BRIDGE.)

▲ DETAILS SHOWN ARE FOR REMOVING EXISTING ENDPOST AND EXISTING APPROACH GUARDRAIL AT BRIDGE ENDS AND REPLACING WITH NEW 10'-2" CONCRETE ENDPOST (ITEM NO.620-10.01) AND NEW APPROACH GUARDRAIL, (ITEM NO. 705-01.01)

B/R MINOR REVISION - FHWA APPROVAL NOT REQUIRED

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF HIGHWAYS

STANDARD DRAWING FOR REPLACING EXISTING CONCRETE ENDPOST AND GUARDRAIL AT EXISTING BRIDGE ENDS 1992

DESIGNED BY	McINTURFF	DATE	9-92
DRAWN BY	PHILLIP GIVAN	DATE	9-92
SUPERVISED BY	GENTRY & McINTURFF	DATE	
CHECKED BY	McINTURFF	DATE	

SBR-2-136