



REV. 10-21-19: CORRECTED SPELLING OF "PEDESTAL".

REV. 12-18-25: UPDATED TO CONFORM TO MUTCD 11TH EDITION.

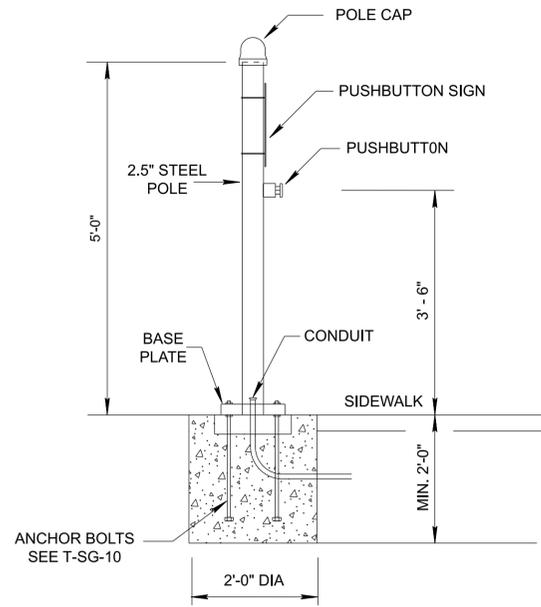


PEDESTRIAN PUSHBUTTON POST

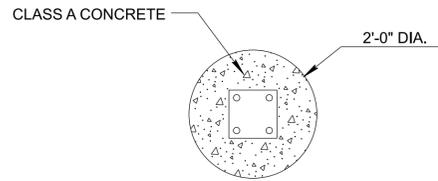


FOUNDATION DETAIL
PEDESTRIAN PUSHBUTTON POST

PEDESTRIAN GENERAL NOTES

- (A) PUSHBUTTONS AT SIGNALIZED CROSSWALKS SHALL INCORPORATE A LOCATOR TONE MEETING THE REQUIREMENTS OF MUTCD SECTIONS 4K.03 AND 4K.04. AN ACCESSIBLE PEDESTRIAN SIGNAL AND PEDESTRIAN PUSHBUTTON IS AN INTEGRATED DEVICE THAT COMMUNICATES INFORMATION ABOUT THE WALK AND DON'T WALK INTERVALS AT SIGNALIZED INTERSECTIONS IN NON-VISUAL FORMATS (I.E. AUDIBLE TONES AND VIBROTACTILE SURFACES) TO PEDESTRIANS WHO ARE BLIND OR HAVE LOW VISION.
 - (B) PEDESTRIAN PUSHBUTTON SHALL PROVIDE A VIBROTACTILE ARROW BUTTON AND AUDIBLE SOUND. SEE PROWAG R308 FOR ADDITIONAL GUIDANCE.
 - (C) THE COST OF PEDESTRIAN PUSHBUTTON SHALL INCLUDE THE FRAME, SIGN, ADA COMPLIANT PUSHBUTTON, AND MOUNTING HARDWARE.
- 730-26.11 COUNTDOWN PEDESTRIAN SIGNAL HEAD W/ AUDIBLE PUSHBUTTON & 15" SIGN

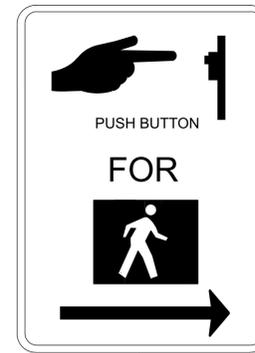

R10-3 (9"X12")

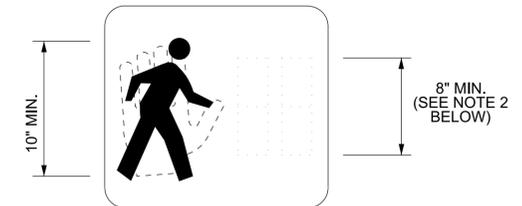


COLOR LEGEND
 MAN - WHITE
 HAND - PORTLAND ORANGE
 NUMBERS - PORTLAND ORANGE

COUNTDOWN PEDESTRIAN
CROSSWALK SIGNAL

NOTES:

- 1. SEE SECTION 4I.04 OF THE MUTCD FOR ADDITIONAL INFORMATION.
- 2. FOR CROSSWALKS WHERE THE PEDESTRIAN ENTERS THE CROSSWALK MORE THAN 100 FEET FROM THE PEDESTRIAN SIGNAL HEAD INDICATIONS, THE SYMBOLS SHOULD BE AT LEAST 9 INCHES HIGH.

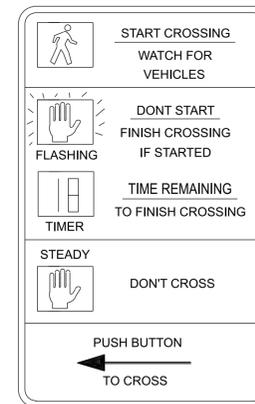

R10-3E (9"X15")



R10-3 (MOD.) (5.44"X14.09")



R10-25 (MOD.) (5.44"X14.09")
(FOR WARNING BEACON ASSEMBLIES SUCH AS RRFBS)

PEDESTRIAN PUSHBUTTON SIGNS
LEFT & RIGHT

LEGEND - WHITE "WALK" (FIGURE) ON BLACK
 ORANGE "DONT WALK" (HAND) ON BLACK
 ALL ELSE BLACK
 BACKGROUND - WHITE (REF.)
 LOCATION - IMMEDIATELY ABOVE PUSHBUTTON

MATERIAL - TYPE II REFLECTIVE SHEETING
 1) MOUNTED ON 0.064" MINIMUM THICK FLAT SHEET ALUMINUM AND BANDED TO WOOD POLES, STEEL POLES, OR PEDESTAL POLES.

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE
STANDARD DRAWING
DEPARTMENT OF TRANSPORTATION

PEDESTRIAN SIGNAL
DETAILS

6-27-16 T-SG-6